



Quick Installation Guide

DG-BA4305

4G Broadband Modem Adapter



Copyright :

Copyright 2017 by Digisol Systems Ltd. All rights reserved.

Company has an ongoing policy of upgrading its products and it may be possible that information in this document is not up-to-date.

Please check with your local distributors for latest information.

No part of this document can be copied or reproduced in any form without written consent from the company.

Trademarks:

DIGISOL™ is a trademark of Digisol Systems Ltd. All other trademarks are the property of the respective manufacturers.

Package Contents

The following items should be present in your package:

- DG-BA4305 4G Broadband Modem Adapter
- Quick Installation Guide

Make sure that the package contains above items. If any of the listed items is damaged or missing, please contact your retailer immediately.

Product Overview

Thank you for choosing DIGISOL DG-BA4305 4G Broadband Modem Adapter! With this 4G broadband adapter you can get connected to Internet using the high speed 4G network. When this adapter is connected to a system then the utility/driver installation wizard is initiated automatically without the need of a CD-ROM for installation. Through the utility users can make/receive a voice call and also track data usage for their connection. This adapter also has a Micro SD slot for Mass Storage. User can send or receive a SMS and maintain a phone book with the help of the software which is installed with this adapter.

Product Features

- Supports 4G(B1/B3/B5/B7/B38/B40/B41),HSPA / UMTS (2100MHz), GSM / GPRS / EDGE (850/900/1800/1900MHz)
- Supports HSPA+ (21Mbps), HSDPA (14.4Mbps), HSDPA (7.2 Mbps), HSUPA (5.76 Mbps), UMTS (384 Kbps), EDGE (237 Kbps), GPRS (85.6 Kbps).
- Supports SMS, phone book, Volume Statistics, USSD via Software.
- Supports USB 3.0 High speed interface.
- Micro SD slot for Mass Storage, maximum capacity up to 64GB.
- No-CDROM required, auto installs the software.
- Plug-n-Play installation.
- USSD support

System Requirements

The following system requirements are recommended

- Notebook or desktop PC with a free USB port
- Windows 2003, Windows XP, Win Vista, Win 7, Win 8, Win 10
- MAC OSX 10.5, 10.6, 10.7 & 10.8
- At least 100MB free disk space & 256MB RAM

Product Views


Below shown is the product front and rear view.




Hardware Installation

Following are the steps for inserting the SIM and a Micro SD card in the 4G USB adapter.

1. Slide the back cover to remove it from the 4G USB adapter.




2. Insert the SIM card into its corresponding slot, as shown in the following figure.

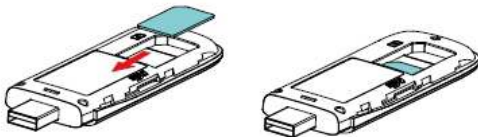

Ensure that the beveled edge of the SIM card is properly aligned with that of the SIM card slot.


3. Insert the Micro SD card into its corresponding slot, as shown in the following figure.



Ensure that the Micro SD card is inserted according to the direction as labeled on the Micro SD card slot.

NOTE: The Micro SD card is an optional accessory. It is not included in the package.

4 Replace the back cover and slide it into place




Note: Do not remove the Micro SD or SIM card when the card is in use. Otherwise, the card as well as your 4G USB adapter may get damaged and the data stored on the card may get corrupted.

Software Installation


The software installation procedure depends on the operating system (OS) installed on your PC. This section takes Windows OS as an example.

1.Plug the 4G USB adapter into the USB port of your PC.




2.The OS automatically detects and recognizes the new hardware and starts the installation wizard. Click 'Next' button to continue with the installation.


NOTE: If installation does not start automatically, then go to "My Computer" and click on the icon CD ROM "4G Digiconnect".

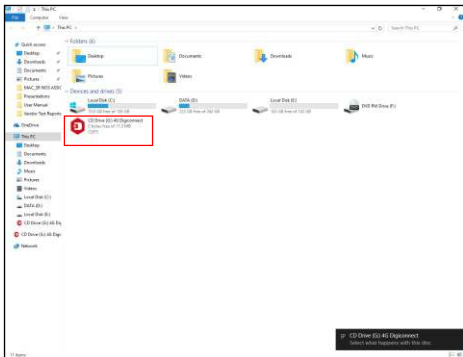


3. The OS automatically detects and recognizes the new hardware and starts the installation wizard. Click 'Next' button to continue with the installation.

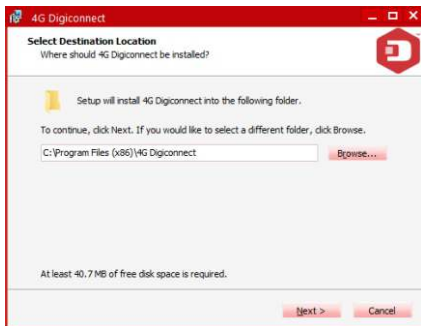


4. If you wish to create the icon on the desktop then select the check box else un-select it. Also, you can create quick launch icon. Click the 'Next' button to continue with the installation.

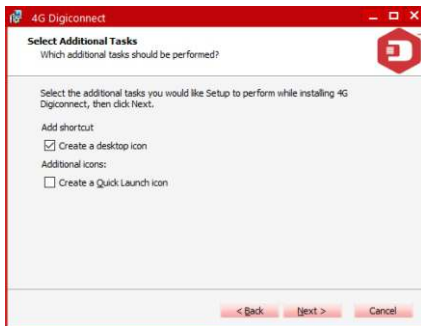

5. Click the 'Install' button to install the application.

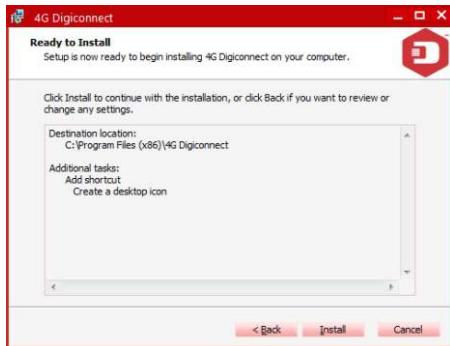

6. Below screen will appear. You can see that the utility is getting installed.

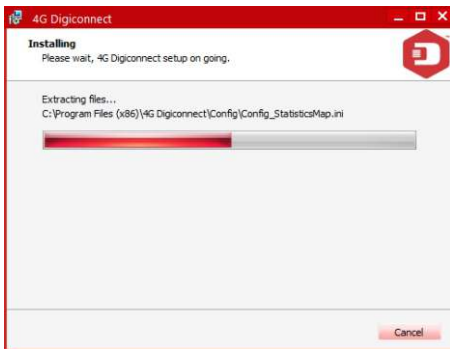

7. Click the 'Finish' button to finish the software installation and tick the "Launch application" if you wish to launch the utility once you exit the Setup.



The application runs automatically after finishing the installation.



Congratulations! Your 4G USB adapter installation is now finished.

4G Digiconnect Utility

The main menus of the utility "4G Digiconnect" are displayed as follows:



: Connect /disconnect to the internet



: Access to the SMS service interface











: Access to the Phonebook interface



: Access to USSD interface



: Set items

Status	Description
New Message	 New message(s) arrived.
Message full	 Indicates the (U)SIM's storage of SMS is full.
No device	Indicates that system cannot find the device.
Initializing	Indicates that the device is in the process of initializing.
Searching	The device is searching for the network.
No service	No suitable network.
No (U)SIM card	(U)SIM card not inserted or the device cannot recognize the (U)SIM.
Invalid (U)SIM card	 The (U)SIM is out of service.
Network signal	 Indicate the signal strength of the network.
Network type	 GSM/GPRS,  UMTS.
Data service	 EDGE available,  HSPA available.

LED Indicator

LED	Description
Red	No SIM detected
Green Steady	Registered 4G/HSPA/UMTS/EDGE/GPRS
Green Blinking	Data transmitting
Blue	Registered 3G/HSPA/UMTS/EDGE/GPRS

For detailed configuration refer to the user manual.

Frequently Asked Questions

Following are the solutions to problems that may occur during the installation and operation of the DIGISOL DG-BA4305 150Mbps 4G Broadband Adapter.

1. Cannot get connected to Internet.

- Verify whether the 4G USB adapter is firmly inserted and the LED is ON.
- Verify whether the driver/software of the adapter is installed correctly.
- Ensure that the correct profile is used to connect to Internet. Also verify that the 4G signal strength is appropriate.
- Verify if SIM card is functional and working properly either into any Cell phone or other dongle.
- If still the issue persists then please contact DIGISOL TAC.

2. SIM card inserted in 4G dongle but there is no network display.

- Verify if SIM card is working or not.
- Verify whether the SIM card is inserted properly.
- Uninstall and reinstall the utility.

This product comes with limited lifetime Warranty. For further details about warranty policy and Product Registration, please visit support section of www.digisol.com





Limited Lifetime Warranty

This Product is covered under DIGICARE Limited Lifetime Warranty program backed by DIGICARE Service Center. To avail this Limited Lifetime Warranty offer, customer needs to contact DIGICARE's Technical Assistance Center for the same. You may be asked to provide proof of purchase of product for warranty claim of defective product. Please refer website www.digisol.com for the detailed support terms & conditions and support process.

Warranty Policy

- 1. Hardware Warranty :** Hardware warranty period shall be limited up to Three years. External Power Adapter shall carry One year warranty only against manufacturing defects. Any repair or replacement will be rendered by DIGICARE at its Service Center only.
- 2. Software Warranty :** DIGISOL issues this Limited Software Warranty that the software portion of the product ("Software") will substantially confirm to DIGISOL's then current functional specifications for the software, as set forth in the applicable documentation, from the date of original retail purchase of the Software for a period of one year ("Software Warranty period"), provided that the Software is properly installed on approved hardware and operated as contemplated in its documentation.
- 3. Governing Law:** This warranty shall be governed by Indian Laws.
- 4. Limited Lifetime Warranty** shall subject to the terms & conditions specified in the DIGISOL PRODUCT WARRANTY policy displayed on www.digisol.com



 helpdesk@digisol.com
 1800 209 3444



This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



DIGISOL SYSTEMS LIMITED

Smartlink House, Plot. No. 5,
Off CST Road, Bandra-Kurla Complex Road,
Santacruz (East), Mumbai - 400 098, India.

Tel: +91 22 3061 6666 / 2652 6696,

Fax: +91 22 2652 8914

A Subsidiary of Smartlink Network Systems Ltd.

www.digisol.com

DIGICARE™
Service And Support

 **1800 209 3444**
 helpdesk@digisol.com
sales@digisol.com