



DIGISOL™



DG-GS1528

**24 PORTS GIGA WEB MANAGED SWITCH WITH 4 SFP
PORTS**

User Manual

V2.0
2018-09-25

As our products undergo continuous development the specifications are subject to change without prior notice

COPYRIGHT

Copyright 2018 by Digisol Systems Ltd. All rights reserved.

Company has an ongoing policy of upgrading its products and it may be possible that information in this document is not up-to-date.

Please check with your local distributors for latest information. No part of this document can be copied or reproduced in any form without written consent from the company.

TRADEMARK

DIGISOL™ is a trademark of Digisol Systems Ltd. All other trademarks are the property of the respective manufacturers.

Table of Contents

1. Introduction.....	10
1.1. Overview	10
1.2. Package contents.....	10
1.3. Features.....	10
1.4. Product Components	11
1.4.1. Ports	11
1.4.2. LED Indicators.....	12
2. Installation.....	13
2.1. Mounting the Switch	13
2.1.1. Placement Tips	13
2.1.2. Rack Mounting.....	15
3. Getting Started.....	18
3.1. Power.....	18
3.1.1. Connecting to Power	18
3.1.2. Connecting to the Network.....	20
3.1.3. Starting the Web-based Configuration Utility	21
3.1.4. Logging In	22
4. Web-based Switch Configuration	25
4.1. Status	27
4.1.1. System Information	27
4.1.2. Port	29
4.1.2.1. Statistics	29
4.1.2.2. Error Disabled.....	32

4.1.2.3. Traffic Statistics	34
4.1.3. Link Aggregation	35
4.1.4. MAC Address Table	36
4.2. Network	37
4.2.1. IP Address	37
4.2.2. System Time	38
4.3. Port.....	41
4.3.1. Port Setting	41
4.3.2. Link Aggregation	45
4.3.2.1. Group	45
4.3.2.2. Port Setting	47
4.3.2.3. LACP	49
4.3.3. EEE	51
4.3.4. Jumbo Frame	53
4.5. VLAN	54
4.5.1. VLAN	54
4.5.1.1. Create VLAN	54
4.5.1.2. VLAN Configuration	56
4.5.1.3. Membership	57
4.5.1.4. Port Setting	59
4.5.2. Voice VLAN	62
4.5.2.1. Property	62
4.5.2.2. Voice OUI	64
4.5.3. MAC VLAN	65
4.5.3.1. MAC Group	66
4.5.3.2. Group Binding	67

4.6. MAC Address Table.....	70
4.6.1. Dynamic Address	70
4.6.2. Static Address	71
4.6.3. Filtering Address	71
4.7. Spanning Tree.....	72
4.7.1. Property	72
4.7.2. Port Setting	75
4.7.3. MST Instance	78
4.7.4. MST Port Setting	80
4.7.5. Statistics	82
4.8. Discovery.....	85
4.8.1. LLDP	85
4.8.1.1. Property	85
4.8.1.2. Port Setting	86
4.8.1.3. Packet View	89
4.8.1.4. Local Information	92
4.8.1.5. Neighbor	95
4.8.5.6. Statistics	96
4.9. Multicast.....	97
4.9.1. General	97
4.9.1.1. Property	98
4.9.1.2. Group Address	99
4.9.1.3. Router Port	101
4.9.2. IGMP Snooping	103
4.9.2.1. Property	103
4.9.2.2. Querier	107

4.9.2.3. Statistics	108
4.9.3. MVR	110
4.9.3.1. Property	110
4.9.3.2. Port Setting	112
4.9.3.3. Group Address	113
4.10. Security	115
4.10.1. RADIUS	115
4.10.2. Management Access	118
4.10.2.1. Management VLAN	118
4.10.2.2. Management Service	118
4.10.2.3. Management ACL	120
4.10.2.4. Management ACE	121
4.10.3. Authentication Manager	123
4.10.3.1. Property	123
4.10.3.2. Port Setting	128
4.10.3.3. Sessions	133
4.10.4. Port Security	135
4.10.5. Protected Port	137
4.10.6. Storm Control	138
4.10.7. DoS	141
4.10.7.1. Property	141
4.10.7.2. Port Setting	143
4.10.8. DHCP Snooping	144
4.10.8.1. Property	144
4.10.8.2. Statistics	146
4.10.8.3. Option82 Property	147

4.10.8.4. Option82 Circuit ID	149
4.10.9. IP Source Guard	151
4.10.9.1. Port Setting	151
4.10.9.2. IMPV Binding	153
4.10.9.3. Save Database	155
4.11. ACL	157
4.11.1. MAC ACL	157
4.11.2. MAC ACE	158
4.11.3. IPv4 ACL	160
4.11.4. IPv4 ACE	161
4.11.5. ACL Binding	166
4.12. QoS	167
4.12.1. General	167
4.12.1.1. Property	167
4.12.1.2. Queue Scheduling	170
4.12.1.3. CoS Mapping	171
4.12.1.4. IP Precedence Mapping	172
4.12.2. Rate Limit	173
4.12.2.1. Ingress/Egress Port	174
4.13. Diagnostics	176
4.13.1. Logging	176
4.13.1.1. Property	176
4.13.1.2. Remote Server	177
4.13.2. Mirroring	178
4.13.3. Ping	181
4.13.4. Traceroute	181

4.14. Management	183
4.14.1. User Account	183
4.14.2. Firmware	184
4.14.2.1. Upgrade / Backup	184
4.14.2.2. Active Image	189
4.14.3. Configuration	190
4.14.3.1. Upgrade / Backup	190
4.14.3.2. Save Configuration	195
4.14.4. SNMP	196
4.14.4.1. View	196
4.14.4.2. Group	196
4.14.4.3. Community	199
4.14.4.4. User	201
4.14.4.5. Engine ID	204
4.14.4.6. Trap Event	205
4.14.4.7. Notification	206
4.15.5. RMON	209
4.15.5.1. Statistics	209
4.15.5.2. History	212
4.15.5.3. Event	215
4.15.5.4. Alarm	218

Safety and Regulatory

Audience

This guide is for the networking professional managing the standalone DG-GS1528 switch series. It is recommended that only professionals with experience working with Digisol Systems Limited networking devices who are familiar with the Ethernet and local area networking terminology, should service the equipment.

Conventions

The following conventions are used in this manual to convey instructions and information:

Command descriptions use these conventions:

- Commands and keywords are in boldface text.
- Arguments for which you supply values are in italic.
- Square brackets ([]) mean optional elements.
- Braces ({ }) group required choices, and vertical bars (|) separate the alternative elements.
- Braces and vertical bars within square brackets ([{ | }]) mean a required choice within an optional element.

Interactive examples use these conventions:

- Nonprinting characters, such as passwords or tabs, are in angle brackets (< >).

Notes and cautions use the following conventions and symbols:

— Note

Means additional information. Notes contain additional useful information or

references to material available outside of this document.

— — Caution

Indicates that the reader must be careful. In a situation where a Caution is listed, a user may cause equipment damage or loss of data.

1. Introduction

Thank you for choosing a Digisol WEB Smart Ethernet Switch. This device is designed to be operational right out-of-the-box as a standard bridge. In the default configuration, it will forward packets between connecting devices after powered up.

Before you begin installing the switch, make sure you have all of the package contents available, and a PC with a web browser for using web-based system management tools.

1.1. Overview

The Digisol DG-GS1528 is a WEB Smart switch with 28 Gigabit ports.

1.2. Package contents

Before using the product, check that the items listed below are included and in good condition. If any item does not accord with the table, please contact your dealer immediately.

- Digisol DG-GS1528 WEB Smart Switch
- Quick Installation Guide
- Power Cord
- Manual CD
- Rack Mount Kit
- Foot pads

1.3. Features

- Supports up to 24 10/100/1000Mbps Gigabit Ethernet ports and 4 SFP slots or 4 mini-GBIC/SFP slots
- IEEE 802.1Q VLAN allows network segmentation to enhance performance and

security

- Supports Access Control List (ACL)
- Switch capacity: DG-GS1528: 56Gbps; Forwarding rate: 41.7Mpps
- Supports IGMP Snooping V1 / V2 / V3
- 8K MAC address table and 10K jumbo frames
- 19-inch rack-mountable metal case

1.4. Product Components

1.4.1. Ports

The following view applies to DG-GS1528.

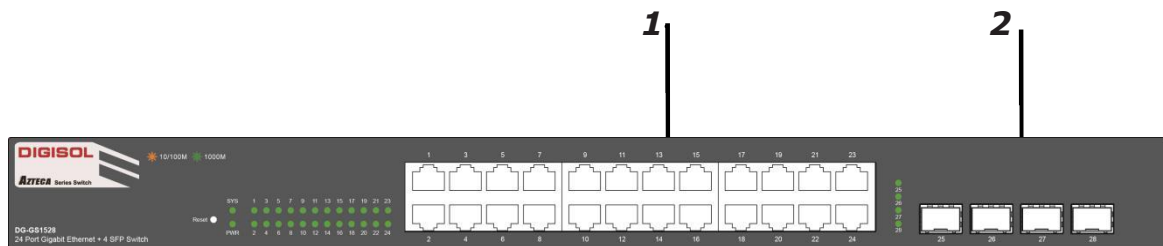


Figure 1 - Front View

No.	Name	Description
1	10/100/1000Mbps RJ-45 ports (1~24)	Designed to connect to network devices with a bandwidth of 10Mbps, 100Mbps or 1000Mbps. Each has a corresponding 10/100/1000Mbps LED.
2	SFP ports (SFP1, SFP2, SFP3, and SFP4)	Designed to install SFP modules and connect to network devices with a bandwidth of 1000Mbps. Each has a corresponding 1000Mbps LED.

The following view applies to DG-GS1528.



Figure 2 - Rear View

No.	Name	Description
1	AC power in	Supports AC 100 – 240V, 50-60Hz.

1.4.2. LED Indicators

The following view applies to DG-GS1528.

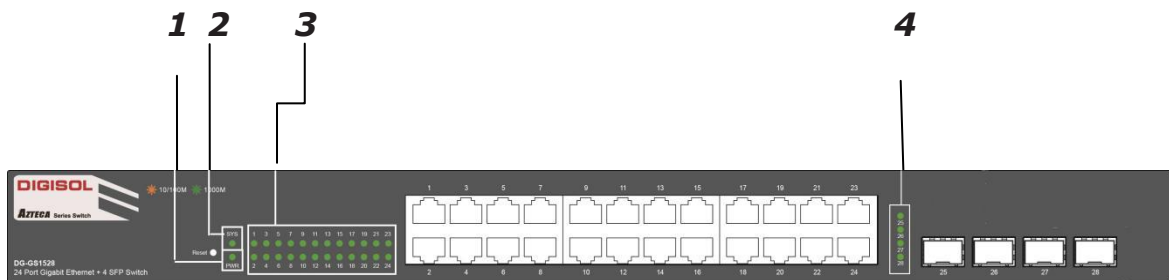


Figure 5 - Front View LED Indicators

No.	Name	Description
1	Power	<ul style="list-style-type: none"> Off: power off On: power on
2	System	<ul style="list-style-type: none"> Off: system not ready On: system ready

		<ul style="list-style-type: none"> • Blinking: system boot-up
3	Port LED	LINK/ACT bi-color LED: <ul style="list-style-type: none"> • Off: port disconnected or link fail • Green on: 1000Mbps connected • Amber on: 10/100Mbps connected • Blinking: sending or receiving data
4	SFP LED	<ul style="list-style-type: none"> • Off: port disconnected or link fail • Green on: 1000Mbps connected

2. Installation

This chapter describes how to install and connect your Digisol Systems Limited Switch. Read the following topics and perform the procedures in the correct order. Incorrect installation may cause damage to the product.

2.1. Mounting the Switch

There are two ways to physically set up the switch.

- Place the switch on a flat surface. To place the switch on a desktop, install the four rubber feet (included) on the bottom of the switch.
- Mount the switch in a standard rack (1 rack unit high).

2.1.1. Placement Tips

- Ambient Temperature—To prevent the switch from overheating, do not operate it in an area that exceeds an ambient temperature of 122°F (50°C).

- Air Flow—Be sure that there is adequate air flow around the switch.
- Mechanical Loading—Be sure that the switch is level and stable to avoid any hazardous conditions.
- Circuit Overloading—Adding the switch to the power outlet must not overload that circuit.

Follow these guidelines to install the switch securely.

1. Put the switch in a stable place such as a desktop, to avoid it falling.
2. Ensure the switch works in the proper AC input range and matches the voltage labeled.
3. Ensure there is proper heat dissipation from and adequate ventilation around the switch.
4. Ensure the switch's location can support the weight of the switch and its accessories.

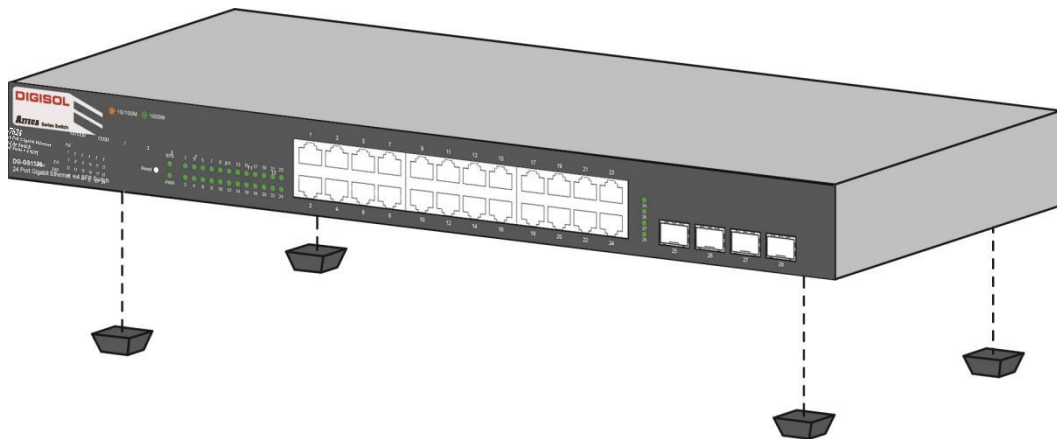


Figure 8 - Desktop Installation

2.1.2. Rack Mounting

You can mount the switch in any standard size, 19-inch (about 48 cm) wide rack. The switch requires 1 rack unit (RU) of space, which is 1.75 inches (44.45 mm) high.

- — For stability, load the rack from the bottom to the top, with the heaviest devices on the bottom. A top-heavy rack is likely to be unstable and may tip over.

When mounting smaller switch products into a standard 19-inch rack, a pair of extension brackets (sometimes referred to as ears) are needed to adapt the switch to the rack size.

These extension brackets are mounted on the switch using the screws provided in the kit, and have two holes that are used to then screw the switch into the rack.

An example of one type of these extension brackets is shown in the following figure.

A common problem that occurs during rack mounting is the distance between the screw holes on the rack. Some racks are made with a uniform distance between all of the holes, and others have the holes organized into groups (see photo on the next page for an example).

When organized into groups, the switch must be placed in the rack so that the holes in the extension brackets line up correctly.

1. Align the mounting brackets with the mounting holes on the switch's side panels and secure the brackets with the screws provided.

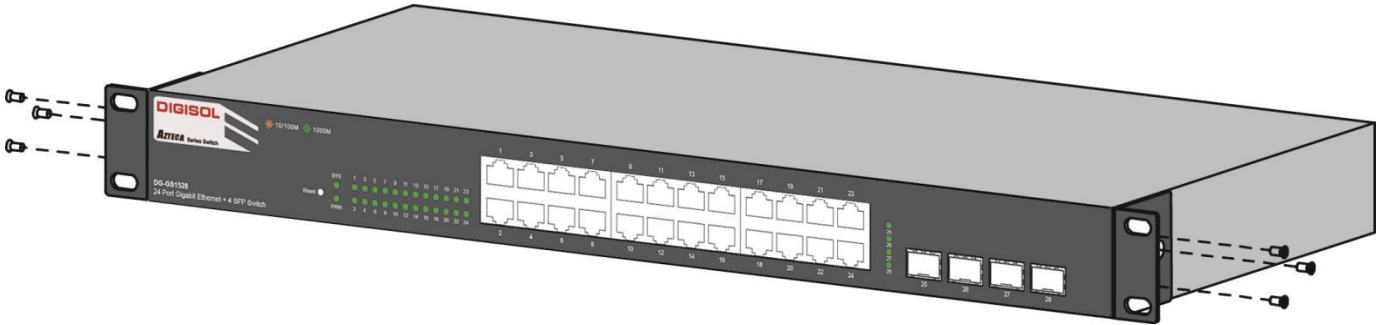


Figure 9 - Bracket Installation

2. Secure the switch on the equipment rack with the screws provided.

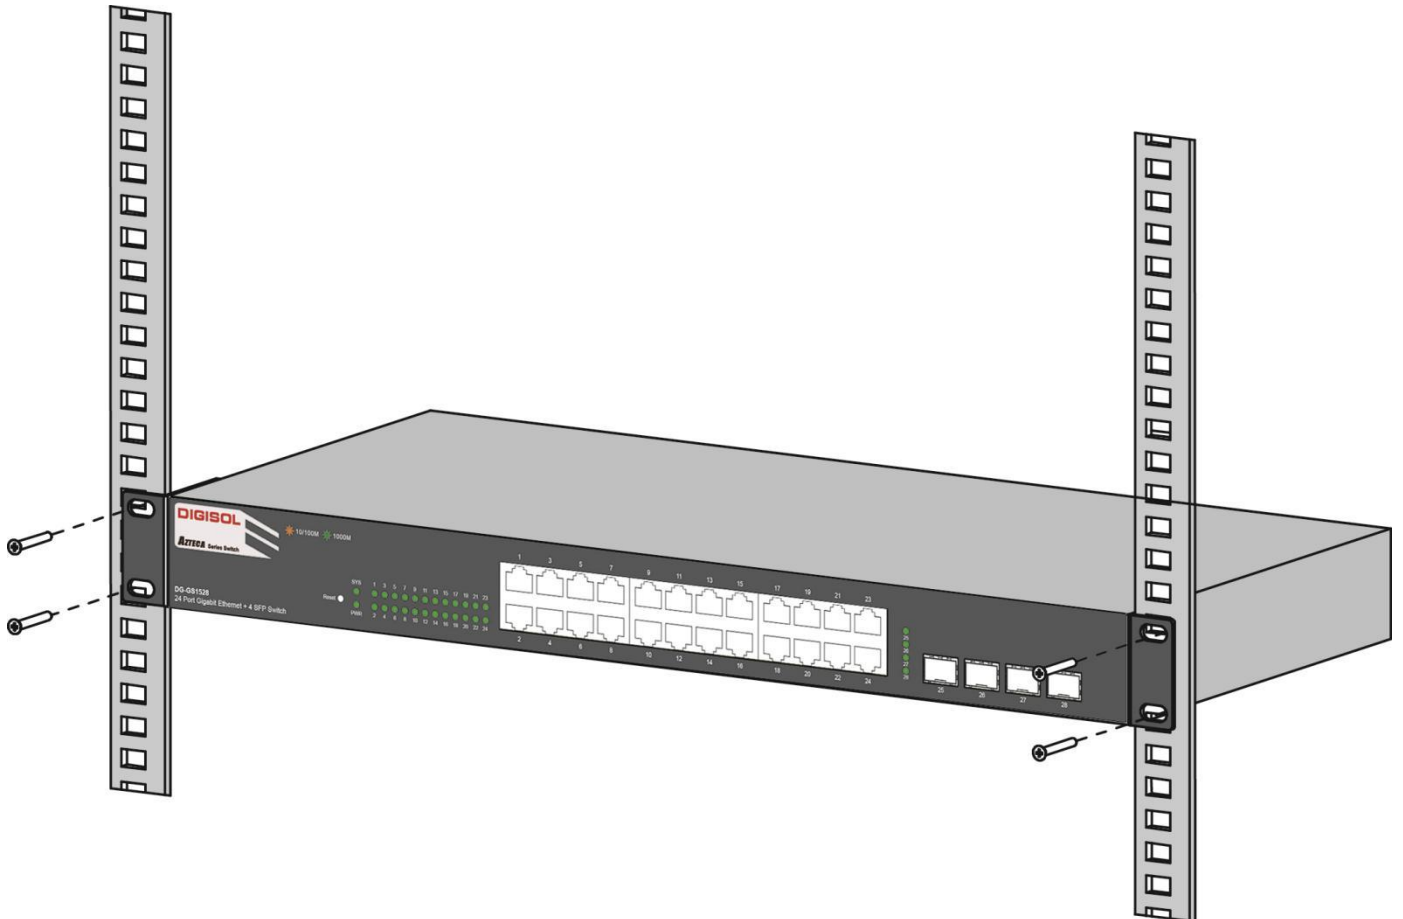


Figure 10 - Rack Installation

3. Getting Started

This section provides an introduction to the web-based configuration utility, and covers the following topics:

- Powering on the device
- Connecting to the network
- Starting the web-based configuration utility

3.1. Power

3.1.1. Connecting to Power

—— Power down and disconnect the power cord before servicing or wiring a switch.

— — Do not disconnect modules or cabling unless the power is first switched off. The device only supports the voltage outlined in the type plate. Do not use any other power components except those specifically designated for the switch.

— — Disconnect the power cord before installation or cable wiring.

The switch is powered by the AC 100-240 V 50/60Hz internal high-performance power supply. It is recommended to connect the switch with a single-phase three-wire power source with a neutral outlet, or a multifunctional computer professional source.

Connect the AC power connector on the back panel of the switch to the external power source with the included power cord, and check the power LED is on.



Figure 11 - Rear View AC Power Socket

3.1.2. Connecting to the Network

To connect the switch to the network:

1. Connect an Ethernet cable to the Ethernet port of a computer
2. Connect the other end of the Ethernet cable to one of the numbered Ethernet ports of the switch. The LED of the port lights if the device connected is active.
3. Repeat Step 1 and Step 2 for each device to connect to the switch.

— We strongly recommend using CAT-5E or better cable to connect network devices. When connecting network devices, do not exceed the maximum cabling distance of 100 meters (328 feet). It can take up to one minute for attached devices or the LAN to be operational after it is connected. This is normal behavior.

Connect the switch to end nodes using a standard Cat 5/5e Ethernet cable (UTP/STP) to connect the switch to end nodes as shown in the illustration below.

Switch ports will automatically adjust to the characteristics (MDI/MDI-X, speed, duplex) of the device to which the switch is connected.

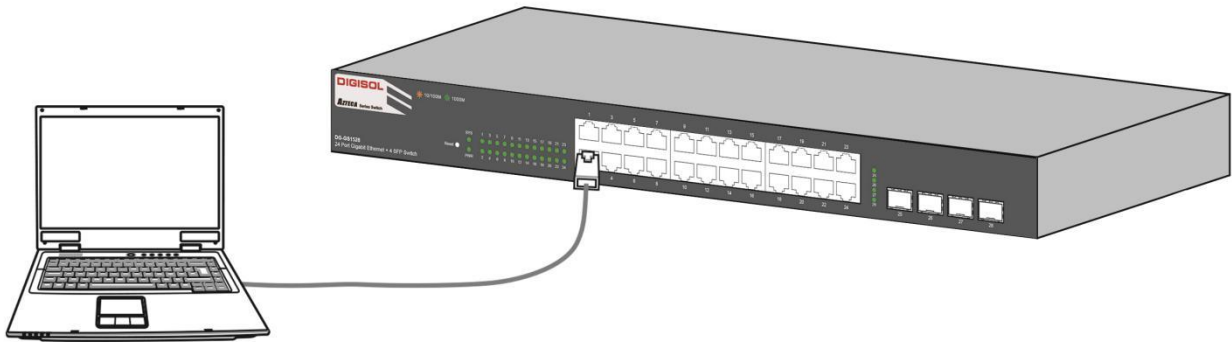


Figure 12 - PC Connect

3.1.3. Starting the Web-based Configuration Utility

This section describes how to navigate the web-based switch configuration utility.

Be sure to disable any pop-up blocker.

Browser Restrictions

- If you are using older versions of Internet Explorer, you cannot directly use an IPv6 address to access the device. You can, however, use the DNS (Domain Name System) server to create a domain name that contains the IPv6 address, and then use that domain name in the address bar in place of the IPv6 address.
- If you have multiple IPv6 interfaces on your management station, use the IPv6 global address instead of the IPv6 link local address to access the device from your browser.

Launching the Configuration Utility

To open the web-based configuration utility:

1. Open a Web browser.
2. Enter the IP address of the device you are configuring in the address bar on the browser (factory default IP address is 192.168.1.10) and then press Enter.

— When the device is using the factory default IP address, its power LED flashes continuously. When the device is using a DHCP assigned IP address or an administrator-configured static IP address, the power LED is lit a solid color. Your computer's IP address must be in the same subnet as the switch. For example, if the switch is using the factory default IP address, your computer's IP address can be in the following range: 192.168.169.x (whereas x is a number from 2 to 254).

After a successful connection, the login window displays.



Figure 13 - Login Window

3.1.4. Logging In

The default username is admin and the default password is admin. The first time that you log in with the default username and password, you are required to enter a new password.

To log in to the device configuration utility:

1. Enter the default user ID (admin) and the default password (admin).
2. If this is the first time that you logged on with the default user ID (admin) and the default password (admin) it is recommended that you change your password immediately. See "4.9.3. Administrator" on page 79 for additional information.

When the login attempt is successful, the **System Information** window displays.

System Information

Model	DG-GS1528
System Name	Switch
System Location	Default
System Contact	Default
MAC Address	00:17:7C:82:50:81
IPv4 Address	192.168.1.10
System Uptime	0 day, 0 hr, 30 min and 49 sec
Current Time	2000-01-01 08:30:49 UTC+8
Loader Version	2.1.3.46351
Loader Date	Sep 28 2017 - 13:47:05
Firmware Version	1.00.08
Firmware Date	Nov 29 2017 - 03:58:32
Telnet	Enabled
SSH	Enabled
HTTP	Enabled
HTTPS	Enabled
SNMP	Enabled

Figure 14 - System Information

If you entered an incorrect username or password, an error message appears and the Login page remains displayed on the window. If you are having problems logging in, please see the Launching the Configuration Utility section in the Administration Guide for additional information.

Logging Out

By default, the application logs out after ten minutes of inactivity.

To logout, click Logout in the top right corner of any page. The system logs out of the device.

When a timeout occurs or you intentionally log out of the system, a message appears and the Login page appears, with a message indicating the logged-out state. After you log in, the application returns to the initial page.

4. Web-based Switch Configuration

The WEB smart switch software provides rich Layer 2 functionality for switches in your networks. This chapter describes how to use the web-based management interface (Web UI) to configure the switch's features.

For the purposes of this manual, the user interface is separated into four sections, as shown in the following figure:

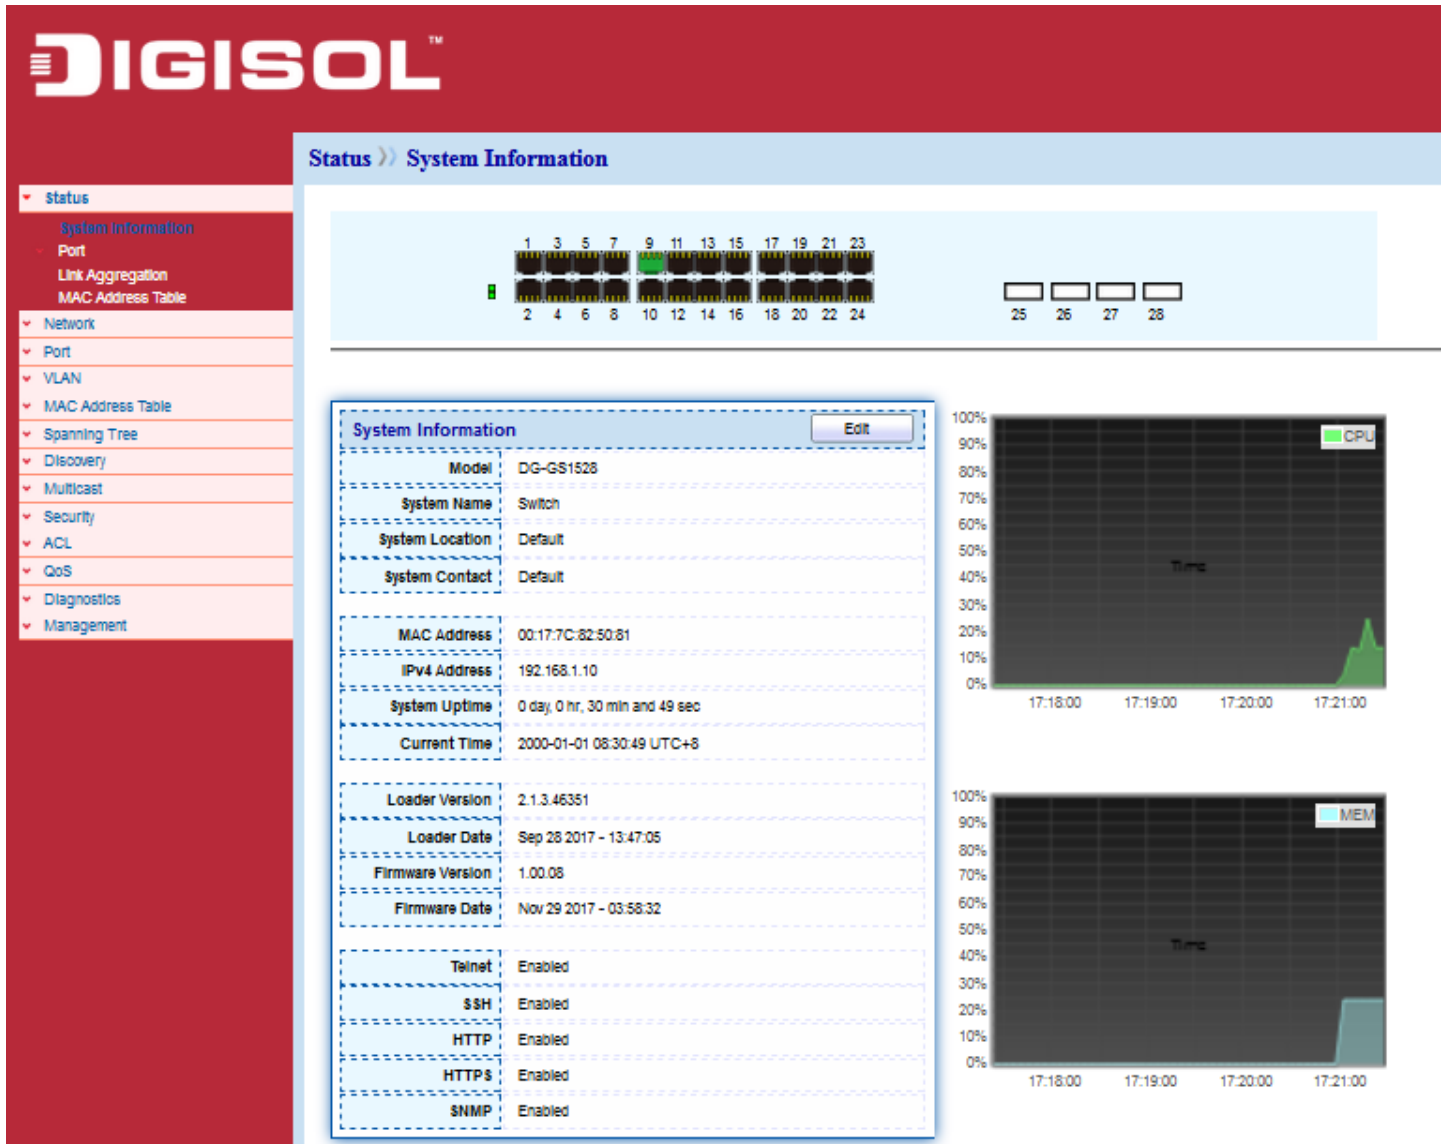


Figure 15 - User Interface

No.	Name	Description
1	Configuration menu	Navigate to locate specific switch functions.
2	Configuration settings	Edit specific function settings.
3	Switch's current link status	Green squares indicate the port link is up, while black squares indicate the port link is down.
4	Common toolbar	Provides access to frequently used settings.

4.1. Status

Use the Status pages to view system information and status.

4.1.1. System Information

This page shows switch panel, CPU utilization, Memory utilization and other system current information. It also allows user to edit some system information.

To view the Device Information menu, navigate to Status > System Information.

The screenshot displays the DIGISOL web interface. On the left is a navigation menu with categories like Status, Network, Port, and Management. The main content area is titled 'Status >> System Information'. At the top, there is a port status indicator showing 28 ports (1-28) with a green light on port 9. Below this is a 'System Information' table with an 'Edit' button. The table contains the following data:

System Information	
Model	DG-GS1528
System Name	Switch
System Location	Default
System Contact	Default
MAC Address	00:17:7C:82:50:81
IPv4 Address	192.168.1.10
System Uptime	0 day, 0 hr, 30 min and 49 sec
Current Time	2000-01-01 08:30:49 UTC+8
Loader Version	2.1.3.46351
Loader Date	Sep 28 2017 - 13:47:05
Firmware Version	1.00.08
Firmware Date	Nov 29 2017 - 03:58:32
Telnet	Enabled
SSH	Enabled
HTTP	Enabled
HTTPS	Enabled
SNMP	Enabled

To the right of the table are two line graphs. The top graph is labeled 'CPU' and shows utilization over time from 17:18:00 to 17:21:00. The bottom graph is labeled 'MEM' and shows memory utilization over the same time period. Both graphs have a y-axis from 0% to 100%.

Figure 16 - Status > System Information

Item	Description
Model	Model name of the switch.
System Name	System name of the switch. This name will also use as CLI prefix of each line. (“Switch>” or “Switch#”)
System Location	Location information of the switch.
System Contact	Contact information of the switch.
MAC Address	Base MAC address of the switch.
IPv4 Address	Current system IPv4 address.
System OID	SNMP system object ID.
System Uptime	Total elapsed time from booting.
Current Time	Current system time.
Loader Version	Boot loader image version.
Loader Date	Boot loader image build date.
Firmware Version	Current running firmware image version.
Firmware Date	Current running firmware image build date.
Telnet	Current Telnet service enable/disable state.
SSH	Current SSH service enable/disable state.
HTTP	Current HTTP service enable/disable state.
HTTPS	Current HTTPS service enable/disable state.
SNMP	Current SNMP service enable/disable state.

Click “Edit” button on the table title to edit following system information.

Edit System Information

System Name	<input type="text" value="Switch"/>
System Location	<input type="text" value="Default"/>
System Contact	<input type="text" value="Default"/>

Figure 17 - Status > System Information > Edit System Information

Item	Description
System Name	System name of the switch. This name will also use as CLI prefix of each line. (“Switch>” or “Switch#”)
System Location	Location information of the switch.
System Contact	Contact information of the switch.

4.1.2. Port

The Port configuration page displays port summary and status information.

4.1.2.1. Statistics

This page displays standard counters on network traffic from the Interfaces, Ethernet-like and RMONMIB. Interfaces and Ethernet-like counters display errors on the traffic passing through each port. RMON counters provide a total count of different frame types and sizes passing through each port. The “Clear” button will clear MIB counter of current selected port.

To view the Port Flow Chart menu, navigate to Status > Port > Statistics.

Port :	GE17 ▼
MIB Counter	<input checked="" type="radio"/> All <input type="radio"/> Interface <input type="radio"/> Etherlike <input type="radio"/> RMON
Refresh Rate	<input type="radio"/> None <input type="radio"/> 5 sec <input checked="" type="radio"/> 10 sec <input type="radio"/> 30 sec

Clear

Interface	
ifInOctets	1927375
ifInUcastPkts	10294
ifInNUcastPkts	1235
ifInDiscards	0
ifOutOctets	4642483
ifOutUcastPkts	11444
ifOutNUcastPkts	254
ifOutDiscards	0
ifInMulticastPkts	1077
ifInBroadcastPkts	158
ifOutMulticastPkts	254
ifOutBroadcastPkts	0
Etherlike	
dot3 StatsAlignmentErrors	0
dot3 StatsFCSErrors	0
dot3 StatsSingleCollisionFrames	0
dot3 StatsMultipleCollisionFrames	0
dot3 StatsDeferredTransmissions	0
dot3 StatsLateCollisions	0
dot3 StatsExcessiveCollisions	0

dot3StatsFrameTooLongs	0
dot3StatsSymbolErrors	0
dot3ControlInUnknownOpCodes	0
dot3InPauseFrames	0
dot3OutPauseFrames	0
RMON	
etherStatsDropEvents	0
etherStatsOctets	1915463
etherStatsPkts	11447
etherStatsBroadcastPkts	151
etherStatsMulticastPkts	1058
etherStatsCRCAlignErrors	0
etherStatsUnderSizePkts	0
etherStatsOverSizePkts	0
etherStatsFragments	0
etherStatsJabbers	0
etherStatsCollisions	0
etherStatsPkts64Octets	6442
etherStatsPkts65to127Octets	2042
etherStatsPkts128to255Octets	607
etherStatsPkts256to511Octets	424
etherStatsPkts512to1023Octets	1932
etherStatsPkts1024to1518Octets	0

Figure 18 - Status > Port > Statistics

Item	Description
Port	Select one port to show counter statistics.
MIB Counter	Select the MIB counter to show different counter type <ul style="list-style-type: none"> • All: All counters. • Interface: Interface related MIB counters. • Etherlike: Ethernet-like related MIB counters.

	<ul style="list-style-type: none"> • RMON: RMON related MIB counters.
Refresh Rate	Refresh the web page every period of seconds to get new counter of specified port.

4.1.2.2. Error Disabled

To view the Error Disabled menu, navigate to Status > Port > Error Disabled.

Error Disabled Table

<input type="checkbox"/>	Port	Reason	Time Left (sec)
<input type="checkbox"/>	GE1	---	---
<input type="checkbox"/>	GE2	---	---
<input type="checkbox"/>	GE3	---	---
<input type="checkbox"/>	GE4	---	---
<input type="checkbox"/>	GE5	---	---
<input type="checkbox"/>	GE6	---	---
<input type="checkbox"/>	GE7	---	---
<input type="checkbox"/>	GE8	---	---
<input type="checkbox"/>	GE9	---	---
<input type="checkbox"/>	GE10	---	---
<input type="checkbox"/>	LAG5	---	---
<input type="checkbox"/>	LAG6	---	---
<input type="checkbox"/>	LAG7	---	---
<input type="checkbox"/>	LAG8	---	---

Figure 19 - Status > Port > Error Disabled

Item	Description
<input type="checkbox"/>	Select one or more port to operate.
Port	Interface or port number.

Reason	Port will be disabled by one of the following error reason: <ul style="list-style-type: none">• BPDU Guard• UDLD• Self Loop• Broadcast Flood• Unknown Multicast Flood• Unicast Flood• ACL• Port Security Violation• DHCP rate limit• ARP rate limit
Time Left (sec)	The time left in second for the error recovery.
Refresh	Refresh the current page.
Recover	Recover the selected port status.

4.1.2.3. Traffic Statistics

This page allow user to browse ports' bandwidth utilization in real time. This page will refresh automatically in every refresh period.

To view the Bandwidth Utilization menu, navigate to Status > Port > Bandwidth Utilization.

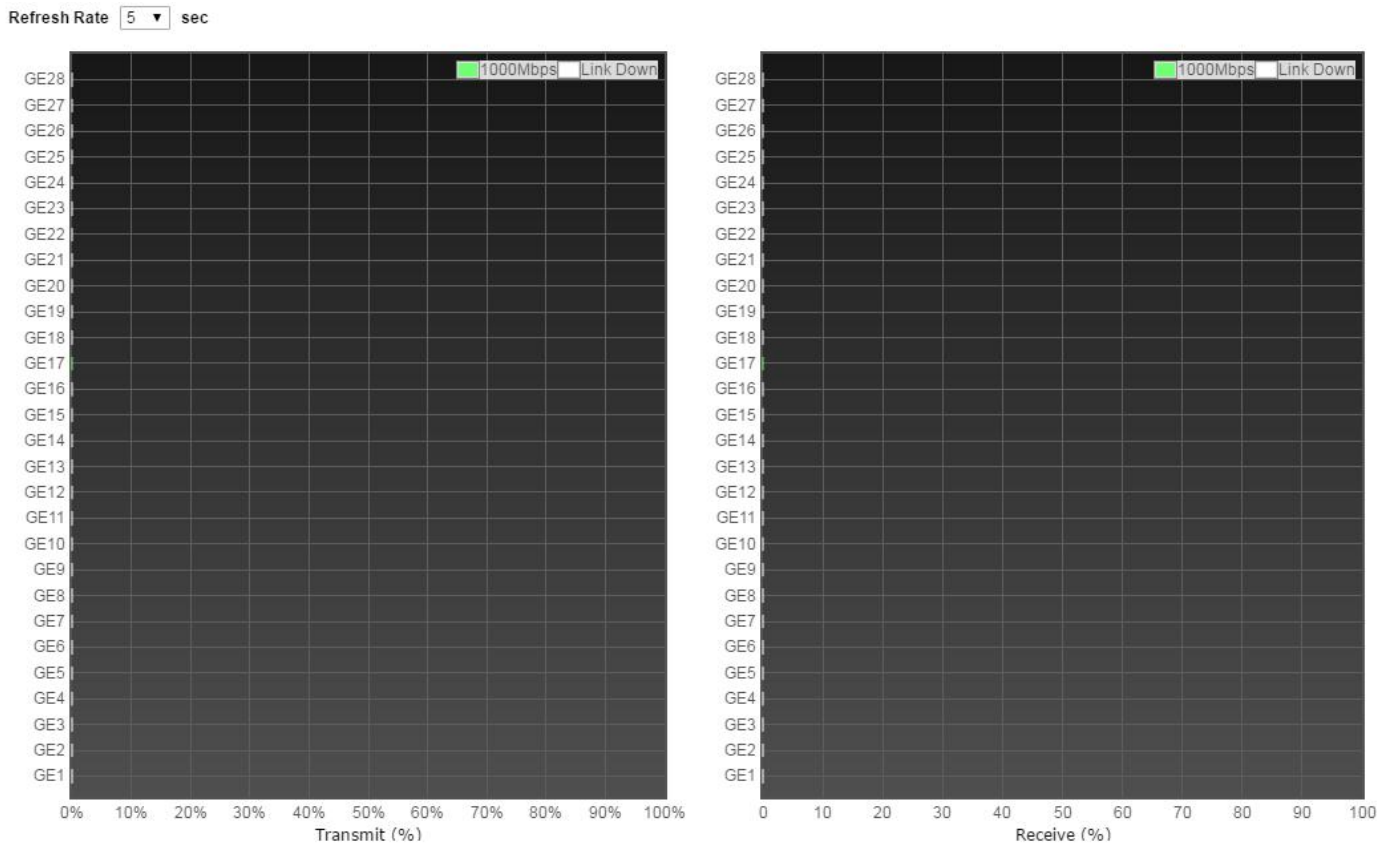


Figure 20 - Status > Port > Bandwidth Utilization

Item	Description
Refresh Rate	Refresh the web page every period of seconds to get new bandwidth utilization data.

4.1.3. Link Aggregation

To view the Link Aggregation menu, navigate to Status > Link Aggregation.

Link Aggregation Table

LAG	Name	Type	Link Status	Active Member	Inactive Member
LAG 1		--	--		
LAG 2		--	--		
LAG 3		--	--		
LAG 4		--	--		
LAG 5		--	--		
LAG 6		--	--		
LAG 7		--	--		
LAG 8		--	--		

Figure 21 - Status > Link Aggregation

Item	Description
LAG	LAG Name.
Name	LAG port description.
Type	<ul style="list-style-type: none"> The type of the LAG. Static: The group of ports assigned to a static LAG are always active members. LACP: The group of ports assigned to dynamic LAG are candidate ports. LACP determines which candidate ports are active member ports.
Link Status	LAG port link status.
Active Member	Active member ports of the LAG.
Inactive Member	Inactive member ports of the LAG.

4.1.4. MAC Address Table

The MAC address table page displays all MAC address entries on the switch including static MAC address created by administrator or auto learned from hardware. The “Clear” button will clear all dynamic entries and “Refresh” button will retrieve latest MAC address entries and show them on page.

To view the MAC Address Table menu, navigate to Status > MAC Address Table.

MAC Address Table

Showing entries Showing 1 to 2 of 2 entries

VLAN	MAC Address	Type	Port
1	00:E0:4C:00:00:00	Management	CPU
1	00:1B:21:25:04:88	Dynamic	GE17

Figure 22 - Status > MAC Address Table

Item	Description
VLAN	VLAN ID of the mac address.
MAC Address	MAC address.
Type	The type of MAC address <ul style="list-style-type: none"> • Management: DUT’ s base mac address for management Purpose • Static: Manually configured by administrator • Dynamic: Auto learned by hardware.
Port	The type of Port <ul style="list-style-type: none"> • CPU: DUT’ s CPU port for management purpose • Other: Normal switch port

4.2. Network

Use the Network pages to configure settings for the switch network interface and how the switch connects to a remote server to get services.

4.2.1. IP Address

This section allows you to edit the IP address, Netmask, Gateway and DNS server of the switch.

To view the IP Address menu, navigate to Network > IP Address.

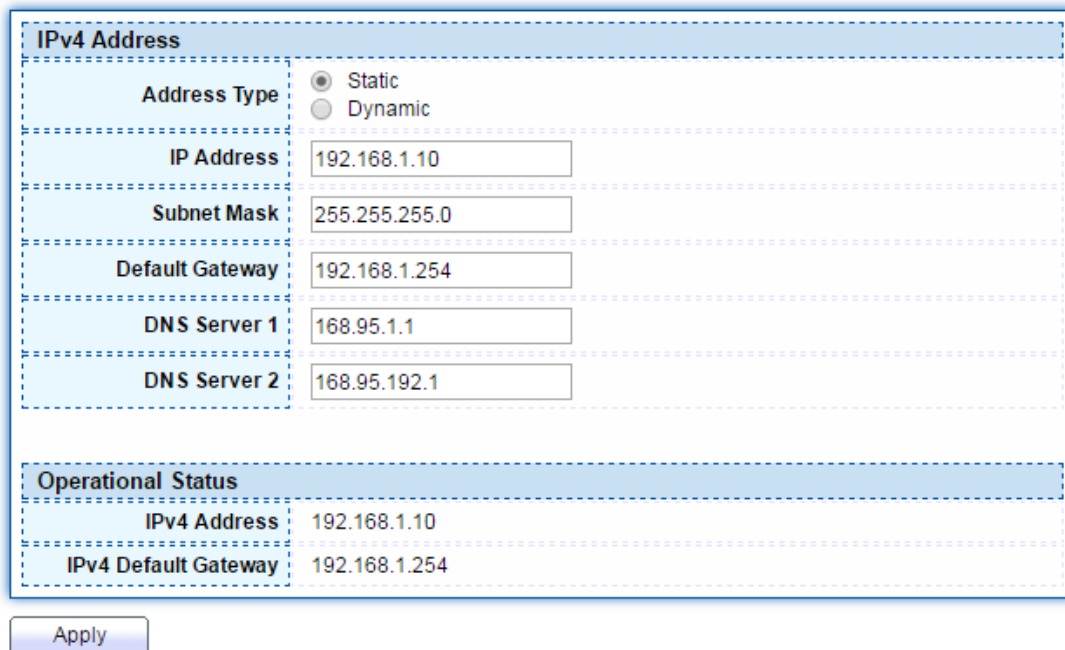


Figure 23 - Network > IP Address

Item	Description
Address Type	The address type of switch IP configuration including <ul style="list-style-type: none"> • Static: Static IP configured by users will be used. • Dynamic: Enable the DHCP to obtain the IP address from a DHCP server.

IP Address	Specify the switch static IP address on the static configuration.
Subnet Mask	Specify the switch subnet mask on the static configuration.
Default Gateway	Specify the default gateway on the static configuration. The default gateway must be in the same subnet with switch IP address configuration.
DNS Server 1	Specify the primary user-defined IPv4 DNS server configuration.
DNS Server 2	Specify the secondary user-defined IPv4 DNS server configuration.
IPv4 Address	The operational IPv4 address of the switch.
IPv4 Default Gateway	The operational IPv4 gateway of the switch.

4.2.2. System Time

This page allow user to set time source, static time, time zone and daylight saving settings. Time zone and daylight saving takes effect both static time or time from SNTP server.

To view the System Time menu, navigate to Network > System Time.

Source

SNTP
 From Computer
 Manual Time

Time Zone : UTC +8:00 ▼

SNTP

Address Type : Hostname
 IPv4

Server Address :

Server Port : (1 - 65535, default 123)

Manual Time

Date : YYYY-MM-DD

Time : HH:MM:SS

Daylight Saving Time

Type : None
 Recurring
 Non-recurring
 USA
 European

Offset : Min (1 - 1440, default 60)

Recurring

From: Day Week Month Time

To: Day Week Month Time

Non-recurring

From: YYYY-MM-DD HH:MM

To: YYYY-MM-DD HH:MM

Operational Status

Current Time : 2000-01-01 00:32:09 UTC+8

Figure 24 - Network > System Time

Item	Description
Source	Select the time source. <ul style="list-style-type: none"> SNTP: Time sync from NTP server. From Computer: Time set from browser host. Manual Time: Time set by manually configure.
Time Zone	Select a time zone difference from listing district.

SNTP	
Address Type	Select the address type of NTP server. This is enabled when time source is SNTP.
Server Address	Input IPv4 address or hostname for NTP server. This is enabled when time source is SNTP.
Server Port	Input NTP port for NTP server. Default is 123. This is enabled when time source is SNTP.
Manual Time	
Date	Input manual date. This is enabled when time source is manual.
Time	Input manual time. This is enabled when time source is manual.
Daylight Saving Time	
Type	Select the mode of daylight saving time. <ul style="list-style-type: none"> • Disable: Disable daylight saving time. • Recurring: Using recurring mode of daylight saving time. • Non-Recurring: Using non-recurring mode of daylight saving time. • USA: Using daylight saving time in the United States that starts on the second Sunday of March and ends on the first Sunday of November. • European: Using daylight saving time in the Europe that starts on the last Sunday in March and ending on the last Sunday in October.
Offset	Specify the adjust offset of daylight saving time.
Recurring From	Specify the starting time of recurring daylight saving time. This field available when selecting “Recurring” mode.
Recurring To	Specify the ending time of recurring daylight saving time.

	This field available when selecting “Recurring” mode.
Non-recurring From	Specify the starting time of non-recurring daylight saving time. This field available when selecting “Non-Recurring” mode.
Non-recurring To	Specify the ending time of recurring daylight saving time. This field available when selecting “Non-Recurring” mode.
Operation Status	
Current Time	Current Time.

4.3. Port

Use the Port pages to configure settings for switch port related features.

4.3.1. Port Setting

This page shows port current status and allow user to edit port configurations. Select port entry and click “Edit” button to edit port configurations.

To view the Port Setting menu, navigate to Port > Port Setting.

Port Setting Table

<input type="checkbox"/>	Entry	Port	Type	Description	State	Link Status	Speed	Duplex	Flow Control
<input type="checkbox"/>	1	GE1	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	2	GE2	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	3	GE3	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	4	GE4	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	5	GE5	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	6	GE6	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	7	GE7	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	8	GE8	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	9	GE9	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	10	GE10	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	11	GE11	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	12	GE12	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	13	GE13	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	14	GE14	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	15	GE15	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	16	GE16	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	17	GE17	1000M Copper		Enabled	Up	Auto (1000M)	Auto (Full)	Disabled (Disabled)
<input type="checkbox"/>	18	GE18	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	19	GE19	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	20	GE20	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	21	GE21	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	22	GE22	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	23	GE23	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	24	GE24	1000M Copper		Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	25	GE25	1000M Fiber		Enabled	Down	Auto	Full	Disabled
<input type="checkbox"/>	26	GE26	1000M Fiber		Enabled	Down	Auto	Full	Disabled
<input type="checkbox"/>	27	GE27	1000M Fiber		Enabled	Down	Auto	Full	Disabled
<input type="checkbox"/>	28	GE28	1000M Fiber		Enabled	Down	Auto	Full	Disabled

Figure 25 - Port > Port Setting

Item	Description
Port	Port Name.
Type	Port media type.
Description	Port Description.
State	Port admin state

	<ul style="list-style-type: none"> • Enabled: Enable the port. • Disabled: Disable the port.
Link Status	Current port link status <ul style="list-style-type: none"> • Up: Port is link up. • Down: Port is link down.
Speed	Current port speed configuration and link speed status.
Duplex	Current port duplex configuration and link duplex status.
Flow Control	Current port flow control configuration and link flow control status.

Click "Edit" button to edit Port Setting menu,

Edit Port Setting

Port :	GE17
Description :	<input type="text"/>
State :	<input checked="" type="checkbox"/> Enable
Speed :	<input checked="" type="radio"/> Auto <input type="radio"/> 10M <input type="radio"/> Auto - 10M <input type="radio"/> 100M <input type="radio"/> Auto - 100M <input type="radio"/> 1000M <input type="radio"/> Auto - 1000M <input type="radio"/> Auto - 10M/100M
Duplex :	<input checked="" type="radio"/> Auto <input type="radio"/> Full <input type="radio"/> Half
Flow Control :	<input type="radio"/> Auto <input type="radio"/> Enable <input checked="" type="radio"/> Disable

Figure 26 - Port > Port Setting > Port Setting

Item	Description
Port	Selected Port list.
Description	Port media type.
State	Port admin state. <ul style="list-style-type: none"> • Enabled: Enable the port. • Disabled: Disable the port.
Speed	Port speed capabilities. <ul style="list-style-type: none"> • Auto: Auto speed with all capabilities. • Auto-10M: Auto speed with 10M ability only. • Auto-100M: Auto speed with 100M ability only. • Auto-1000M: Auto speed with 1000M ability only. • Auto-10M/100M: Auto speed with 10M/100M abilities. • 10M: Force speed with 10M ability. • 100M: Force speed with 100M ability. • 1000M: Force speed with 1000M ability.
Duplex	Port duplex capabilities. <ul style="list-style-type: none"> • Auto: Auto duplex with all capabilities. • Half: Auto speed with 10M and 100M ability only. • Full: Auto speed with 10M/100M/1000M ability only.
Flow Control	Port flow control. <ul style="list-style-type: none"> • Auto: Auto flow control by negotiation. • Enabled: Enable flow control ability. • Disabled: Disable flow control ability.

4.3.2. Link Aggregation

4.3.2.1. Group

This page allow user to configure link aggregation group load balance algorithm and group member.

To view the Group menu, navigate to Port > Link Aggregation > Group.

Load Balance Alogorithm

MAC Address
 IP-MAC Address

Link Aggregation Table

LAG	Name	Type	Link Status	Active Member	Inactive Member
<input type="radio"/>	LAG 1	---	---		
<input type="radio"/>	LAG 2	---	---		
<input type="radio"/>	LAG 3	---	---		
<input type="radio"/>	LAG 4	---	---		
<input type="radio"/>	LAG 5	---	---		
<input type="radio"/>	LAG 6	---	---		
<input type="radio"/>	LAG 7	---	---		
<input type="radio"/>	LAG 8	---	---		

Figure 27 - Port > Link Aggregation > Group

Item	Description
Load Balance Algorithm	LAG load balance distribution algorithm <ul style="list-style-type: none"> src-dst-mac: Based on MAC address. src-dst-mac-ip: Based on MAC address and IP address.
LAG	LAG Name.
Name	LAG port description.
Type	The type of the LAG <ul style="list-style-type: none"> Static: The group of ports assigned to a static LAG are

	always active members. <ul style="list-style-type: none"> LACP: The group of ports assigned to dynamic LAG are candidate ports. LACP determines which candidate ports are active member ports.
Link Status	LAG port link status.
Active Member	Active member ports of the LAG.
Inactive Member	Inactive member ports of the LAG.

Click "Edit" to edit Link Aggregation Group menu.

Edit Link Aggregation Group

LAG	1	
Name	<input type="text"/>	
Type	<input checked="" type="radio"/> Static <input type="radio"/> LACP	
Member	Available Port GE1 GE2 GE3 GE4 GE5 GE6 GE7 GE8	Selected Port <input type="text"/>

Figure 28 - Port > Link Aggregation > Group > Edit Link Aggregation Group

Item	Description
LAG	Selected LAG group ID.
Name	LAG port description.
Type	The type of the LAG <ul style="list-style-type: none"> Static: The group of ports assigned to a static LAG are

	always active members. <ul style="list-style-type: none"> LACP: The group of ports assigned to dynamic LAG are candidate ports. LACP determines which candidate ports are active member ports.
Member	Select available port to be LAG group member port.

4.3.2.2. Port Setting

This page shows LAG port current status and allow user to edit LAG port configurations. Select LAG entry and click “Edit” button to edit LAG port configurations.

To view the Port Setting menu, navigate to Port > Link Aggregation > Port Setting.

Port Setting Table

<input type="checkbox"/>	LAG	Type	Description	State	Link Status	Speed	Duplex	Flow Control
<input type="checkbox"/>	LAG 1			Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	LAG 2			Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	LAG 3			Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	LAG 4			Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	LAG 5			Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	LAG 6			Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	LAG 7			Enabled	Down	Auto	Auto	Disabled
<input type="checkbox"/>	LAG 8			Enabled	Down	Auto	Auto	Disabled

Figure 29 - Port > Link Aggregation > Port Setting

Item	Description
LAG	LAG Port Name.
Type	LAG Port media type.
Description	LAG Port description

State	LAG Port admin state <ul style="list-style-type: none"> Enabled: Enable the port. Disabled: Disable the port.
Link Status	Current LAG port link status <ul style="list-style-type: none"> Up: Port is link up. Down: Port is link down.
Speed	Current LAG port speed configuration and link speed status.
Duplex	Current LAG port duplex configuration and link duplex status.
Flow Control	Current LAG port flow control configuration and link flow control status.

Click "Edit" to view Edit Port Setting menu.

Edit Port Setting

Port: LAG1

Description:

State: Enable

Speed:

- Auto
- Auto - 10M
- Auto - 100M
- Auto - 1000M
- Auto - 10M/100M
- 10M
- 100M
- 1000M

Flow Control:

- Auto
- Enable
- Disable

Figure 30 - Port > Link Aggregation > Port Setting > Edit Port Setting

Item	Description
Port	Selected Port list.

Description	Port description.
State	Port admin state <ul style="list-style-type: none"> • Enabled: Enable the port. • Disabled: Disable the port.
Speed	Port speed capabilities <ul style="list-style-type: none"> • Auto: Auto speed with all capabilities. • Auto-10M: Auto speed with 10M ability only. • Auto-100M: Auto speed with 100M ability only. • Auto-1000M: Auto speed with 1000M ability only. • Auto-10M/100M: Auto speed with 10M/100M abilities. • 10M: Force speed with 10M ability. • 100M: Force speed with 100M ability. • 1000M: Force speed with 1000M ability.
Duplex	Port duplex capabilities <ul style="list-style-type: none"> • Auto: Auto duplex with all capabilities. • Half: Auto speed with 10M and 100M ability only. • Full: Auto speed with 10M/100M/1000M ability only.
Flow Control	Port flow control <ul style="list-style-type: none"> • Auto: Auto flow control by negotiation. • Enabled: Enable flow control ability. • Disabled: Disable flow control ability.

4.3.2.3. LACP

This page allow user to configure LACP global and port configurations. Select ports and click “Edit” button to edit port configuration.

To view the LACP menu, navigate to Port > Link Aggregation > LACP.

System Priority

(1 - 65535, default 32768)

LACP Port Setting Table

<input type="checkbox"/>	Entry	Port	Port Priority	Timeout
<input type="checkbox"/>	1	GE1	1	Long
<input type="checkbox"/>	2	GE2	1	Long
<input type="checkbox"/>	3	GE3	1	Long
<input type="checkbox"/>	4	GE4	1	Long
<input type="checkbox"/>	5	GE5	1	Long
<input type="checkbox"/>	26	GE26	1	Long
<input type="checkbox"/>	27	GE27	1	Long
<input type="checkbox"/>	28	GE28	1	Long

Figure 31 - Port > Link Aggregation > LACP

Item	Description
System Priority	Configure the system priority of LACP. This decides the system priority field in LACP PDU.
Port	Port Name.
Port Priority	LACP priority value of the port.
Timeout	The periodic transmissions type of LACP PDUs. <ul style="list-style-type: none"> Long: Transmit LACP PDU with slow periodic (30s). Short: Transmit LACPP DU with fast periodic (1s).

Click "Edit" button to view Edit LACP Port Setting menu.

Edit LACP Port Setting

Port	GE17	
Port Priority	1	(1 - 65535, default 1)
Timeout	<input checked="" type="radio"/> Long <input type="radio"/> Short	

Figure 32 - Port > Link Aggregation > LACP > Edit LACP Port Setting

Item	Description
Port	Selected port list.
Port Priority	Enter the LACP priority value of the port
Timeout	The periodic transmissions type of LACP PDUs. <ul style="list-style-type: none"> Long: Transmit LACP PDU with slow periodic (30s). Short: Transmit LACPP DU with fast periodic (1s).

4.3.3. EEE

This page allow user to configure Energy Efficient Ethernet settings.

To view the EEE menu, navigate to Port > EEE.

EEE Setting Table

<input type="checkbox"/>	Entry	Port	State	Operational Status
<input type="checkbox"/>	1	GE1	Disabled	Disabled
<input type="checkbox"/>	2	GE2	Disabled	Disabled
<input type="checkbox"/>	3	GE3	Disabled	Disabled
<input type="checkbox"/>	4	GE4	Disabled	Disabled
<input type="checkbox"/>	26	GE26	Disabled	Disabled
<input type="checkbox"/>	27	GE27	Disabled	Disabled
<input type="checkbox"/>	28	GE28	Disabled	Disabled

Figure 33 - Port > EEE

Item	Description
Port	Port Name.
State	Port EEE admin state <ul style="list-style-type: none"> Enabled: EEE is enabled Disabled: EEE is disabled
Operational Status	Port EEE operational status <ul style="list-style-type: none"> Enabled: EEE is operating Disabled: EEE is no operating

Click "Edit" to edit the EEE menu.

Edit EEE Setting

Port	GE17
State	<input type="checkbox"/> Enable

Figure 34 - Port > EEE > Edit EEE Setting

Item	Description
Port	Port Name.
State	Port EEE admin state. <ul style="list-style-type: none"> • Enabled: EEE is enabled • Disabled: EEE is disabled

4.3.4. Jumbo Frame

This page allow user to configure switch jumbo frame size.

To view the Jumbo Frame menu, navigate to Port > Jumbo Frame.

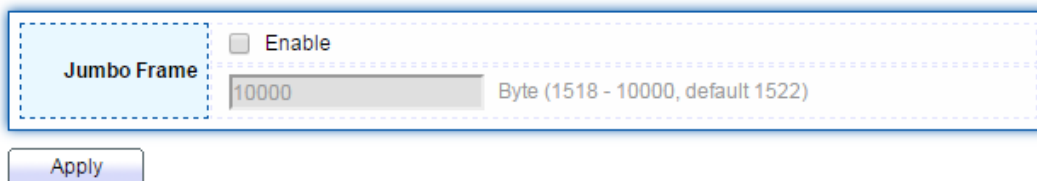


Figure 35 - Port > Jumbo Frame

Item	Description
Jumbo Frame	Enable or disable jumbo frame. When jumbo frame is enabled, switch max frame size is allowed to configure. When jumbo frame is disabled, default frame size 1522 will be used.

4.5. VLAN

A virtual local area network, virtual LAN or VLAN, is a group of hosts with a common set of requirements that communicate as if they were attached to the same broadcast domain, regardless of their physical location. A VLAN has the same attributes as a physical local area network (LAN), but it allows for end stations to be grouped together even if they are not located on the same network switch. VLAN membership can be configured through software instead of physically relocating devices or connections.


4.5.1. VLAN

Use the VLAN pages to configure settings of VLAN.

4.5.1.1. Create VLAN

This page allows user to add or delete VLAN ID entries and browser all VLAN entries that add statically or dynamic learned by GVRP. Each VLAN entry has a unique name, user can edit VLAN name in edit page.

To view the Create VLAN menu, navigate to VLAN > VLAN > Create VLAN.

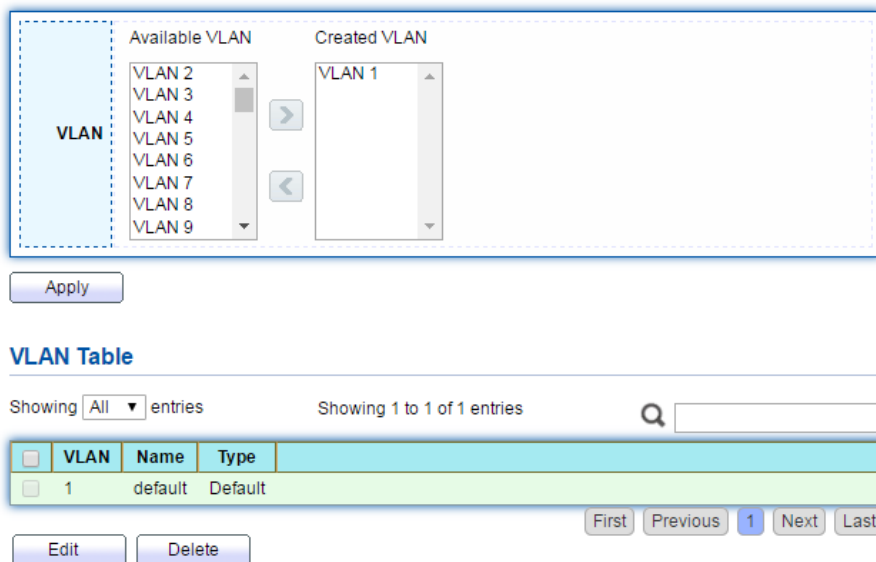

The screenshot displays the 'Create VLAN' interface. It features two columns: 'Available VLAN' and 'Created VLAN'. The 'Available VLAN' column lists VLAN 2 through VLAN 9. The 'Created VLAN' column contains 'VLAN 1'. Below these columns is an 'Apply' button. Underneath is a 'VLAN Table' section with a search bar and pagination controls. The table has columns for 'VLAN', 'Name', and 'Type'. One entry is shown: VLAN 1, Name 'default', Type 'Default'. Below the table are 'Edit' and 'Delete' buttons, and pagination buttons for 'First', 'Previous', '1', 'Next', and 'Last'.

Figure 42 - VLAN > VLAN > Create VLAN

Item	Description
Available VLAN	VLAN has not created yet. Select available VLANs from left box then move to right box to add.
Created VLAN	VLAN had been created. Select created VLANs from right box then move to left box to delete.
VLAN	The VLAN ID.
Name	The VLAN Name.
Type	The VLAN Type. Static: Port base VLAN. Dynamic:802.1q VLAN.

Click "Edit" button to view Edit VLAN Name menu.

Edit VLAN Name

Name

Apply Close

Figure 43 - VLAN > VLAN > Create VLAN > Edit VLAN Name

Item	Description
Name	Input VLAN name.

4.5.1.2. VLAN Configuration

This page allow user to configure the membership for each port of selected VLAN.

To view the VLAN Configuration menu, navigate to VLAN > VLAN > VLAN Configuration .

VLAN Configuration Table

VLAN

Entry	Port	Mode	Membership				PVID
1	GE1	Trunk	<input type="radio"/> Excluded	<input type="radio"/> Forbidden	<input type="radio"/> Tagged	<input checked="" type="radio"/> Untagged	<input checked="" type="checkbox"/>
2	GE2	Trunk	<input type="radio"/> Excluded	<input type="radio"/> Forbidden	<input type="radio"/> Tagged	<input checked="" type="radio"/> Untagged	<input checked="" type="checkbox"/>
3	GE3	Trunk	<input type="radio"/> Excluded	<input type="radio"/> Forbidden	<input type="radio"/> Tagged	<input checked="" type="radio"/> Untagged	<input checked="" type="checkbox"/>
4	GE4	Trunk	<input type="radio"/> Excluded	<input type="radio"/> Forbidden	<input type="radio"/> Tagged	<input checked="" type="radio"/> Untagged	<input checked="" type="checkbox"/>
5	GE5	Trunk	<input type="radio"/> Excluded	<input type="radio"/> Forbidden	<input type="radio"/> Tagged	<input checked="" type="radio"/> Untagged	<input checked="" type="checkbox"/>

Figure 44 - VLAN > VLAN > VLAN Configuration

Item	Description
VLAN	Select specified VLAN ID to configure VLAN configuration.
Port	Display the interface of port entry.
Mode	Display the interface VLAN mode of port.
Membership	Select the membership for this port of the specified VLAN ID. <ul style="list-style-type: none"> Forbidden: Specify the port is forbidden in the VLAN. Excluded: Specify the port is excluded in the VLAN. Tagged: Specify the port is tagged member in the VLAN. Untagged: Specify the port is untagged member in the VLAN.

PVID	Display if it is PVID of interface.
------	-------------------------------------

4.5.1.3. Membership

This page allow user to view membership information for each port and edit membership for specified interface.

To view the Membership menu, navigate to VLAN > VLAN > Membership.

Membership Table

	Entry	Port	Mode	Administrative VLAN	Operational VLAN
<input type="radio"/>	1	GE1	Trunk	1UP	1UP
<input type="radio"/>	2	GE2	Trunk	1UP	1UP
<input type="radio"/>	3	GE3	Trunk	1UP	1UP
<input type="radio"/>	4	GE4	Trunk	1UP	1UP
<input type="radio"/>	5	GE5	Trunk	1UP	1UP
<input type="radio"/>	34	LAG6	Trunk	1UP	1UP
<input type="radio"/>	35	LAG7	Trunk	1UP	1UP
<input type="radio"/>	36	LAG8	Trunk	1UP	1UP

Figure 45 - VLAN > VLAN > Membership

Item	Description
Port	Display the interface of port entry.
Mode	Display the interface VLAN mode of port.
Administrative VLAN	Display the administrative VLAN list of this port.
Operational VLAN	Display the operational VLAN list of this port. Operational VLAN means the VLAN status that really runs in device. It may different to administrative VLAN.

Click "Edit" button to view the Edit Port Setting menu

Edit Port Setting

Port	GE17
Mode	Trunk
Membership	<div style="display: flex; align-items: center;"> <div style="border: 1px solid gray; padding: 5px; margin-right: 10px;"> 4 6 10 </div> <div style="margin-right: 10px;"> <input type="button" value="➤"/> </div> <div style="border: 1px solid gray; padding: 5px; margin-right: 10px;"> 1UP </div> <div> <input type="button" value="➤"/> </div> </div>
	<input type="radio"/> Forbidden <input type="radio"/> Excluded <input checked="" type="radio"/> Tagged <input type="radio"/> Untagged <input type="checkbox"/> PVID

Figure 46 - VLAN > VLAN > Membership > Edit Port Setting

Item	Description
Port	Display the interface.
Mode	Display the VLAN mode of interface.
Membership	<p>Select VLANs of left box and select one of following membership then move to right box to add membership. Select VLANs of right box then move to left box to remove membership. Tagging membership may not choose in differ VLAN port mode. Select the time source.</p> <ul style="list-style-type: none"> • Forbidden: Set VLAN as forbidden VLAN. • Excluded: This option is always disabled. • Tagged: Set VLAN as tagged VLAN. • Untagged: Set VLAN as untagged VLAN. • PVID: Check this checkbox to select the VLAN ID to be the port-based VLAN ID for this port. PVID may auto select or can' t select in differ settings.

4.5.1.4. Port Setting

This page allow user to configure ports VLAN settings such as VLAN port mode, PVID etc...The attributes depend on different VLAN port mode.

To view the Membership menu, navigate to VLAN > VLAN > Port Setting.

Port Setting Table

<input type="checkbox"/>	Entry	Port	Mode	PVID	Accept Frame Type	Ingress Filtering	Uplink	TPID
<input type="checkbox"/>	1	GE1	Trunk	1	All	Enabled	Disabled	0x8100
<input type="checkbox"/>	2	GE2	Trunk	1	All	Enabled	Disabled	0x8100
<input type="checkbox"/>	3	GE3	Trunk	1	All	Enabled	Disabled	0x8100
<input type="checkbox"/>	4	GE4	Trunk	1	All	Enabled	Disabled	0x8100
<input type="checkbox"/>	5	GE5	Trunk	1	All	Enabled	Disabled	0x8100
<input type="checkbox"/>	35	LAG7	Trunk	1	All	Enabled	Disabled	0x8100
<input type="checkbox"/>	36	LAG8	Trunk	1	All	Enabled	Disabled	0x8100

Figure 47 - VLAN > VLAN > Port Setting

Item	Description
Port	Display the interface.
Mode	Display the VLAN mode of interface.
PVID	Display the Port-based VLAN ID of port.
Accept Frame Type	Display accept frame type of port.
Ingress Filtering	Display ingress filter status of port.
Uplink	Display uplink status.
TPID	Display TPID used of interface.

Click "Edit" button to Edit Port Setting menu.

Edit Port Setting

Port	GE17
Mode	<input type="radio"/> Hybrid <input type="radio"/> Access <input checked="" type="radio"/> Trunk <input type="radio"/> Tunnel
PVID	1 (1 - 4094)
Accept Frame Type	<input checked="" type="radio"/> All <input type="radio"/> Tag Only <input type="radio"/> Untag Only
Ingress Filtering	<input checked="" type="checkbox"/> Enable
Uplink	<input type="checkbox"/> Enable
TPID	0x8100

Apply Close

Figure 48 - VLAN > VLAN > Port Setting > Edit Port Setting

Item	Description
Port	Display selected port to be edited.
Mode	Select the VLAN mode of the interface. <ul style="list-style-type: none"> Forbidden: Set VLAN as forbidden VLAN. Hybrid: Support all functions as defined in IEEE 802.1Q specification. Access: Accepts only untagged frames and join an untagged VLAN. Trunk: An untagged member of one VLAN at most, and is a tagged member of zero or more VLANs.
PVID	Specify the port-based VLAN ID (1-4094). It' s only available with Hybrid and Trunk mode.
Accepted Type	Specify the acceptable-frame-type of the specified interfaces. It' s only available with Hybrid mode.
Ingress Filtering	Set checkbox to enable/disable ingress filtering. It' s only

	available with Hybrid mode.
Uplink	Set checkbox to enable/disable uplink mode. It' s only available with trunk mode.
TPID	Select TPID used of interface. It' s only available with trunk mode.

4.5.2. Voice VLAN

Use the Voice VLAN pages to configure settings of Voice VLAN.

4.5.2.1. Property

This page allow user to configure global and per interface settings of voice VLAN.

State Enable

VLAN None

**CoS / 802.1p
Remarking** Enable

**CoS / 802.1p
Remarking** 6

Aging Time 1440 Sec (30 - 65536, default 1440)

Port Setting Table

<input type="checkbox"/>	Entry	Port	State	Mode	QoS Policy
<input type="checkbox"/>	1	GE1	Disabled	Auto	Voice Packet
<input type="checkbox"/>	2	GE2	Disabled	Auto	Voice Packet
<input type="checkbox"/>	3	GE3	Disabled	Auto	Voice Packet
<input type="checkbox"/>	4	GE4	Disabled	Auto	Voice Packet
<input type="checkbox"/>	5	GE5	Disabled	Auto	Voice Packet
<input type="checkbox"/>	34	LAG6	Disabled	Auto	Voice Packet
<input type="checkbox"/>	35	LAG7	Disabled	Auto	Voice Packet
<input type="checkbox"/>	36	LAG8	Disabled	Auto	Voice Packet

To view the Property menu, navigate to VLAN > Voice VLAN > Property.

Figure 49 - VLAN > Voice VLAN > Property

Item	Description
State	Set checkbox to enable or disable voice VLAN function.
VLAN	Select Voice VLAN ID. Voice VLAN ID cannot be default VLAN.

Cos/802.1p	Select a value of VPT. Qualified packets will use this VPT value as inner priority.
Remarking	Set checkbox to enable or disable 1p remarking. If enabled, qualified packets will be remark by this value.
Aging Time	Input value of aging time. Default is 1440 minutes. A voice VLAN entry will be age out after this time if without any packet pass through.
Port Setting Table	
Port	Display port entry.
State	Display enable/disabled status of interface.
Mode	Display voice VLAN mode.
QoS Policy	Display voice VLAN remark will effect which kind of packet.

Click "Edit" button to view Edit Port Setting menu.

Edit Port Setting

Port	GE17
State	<input type="checkbox"/> Enable
Mode	<input checked="" type="radio"/> Auto <input type="radio"/> Manual
QoS Policy	<input checked="" type="radio"/> Voice Packet <input type="radio"/> All

Figure 50 - VLAN > Voice VLAN > Property > Edit Port Setting

Item	Description
Port	Display selected port to be edited.
State	Set checkbox to enable/disabled voice VLAN function of interface.

Mode	Select port voice VLAN mode <ul style="list-style-type: none"> • Auto: Voice VLAN auto detect packets that match OUI table and add received port into voice VLAN ID tagged member. • Manual: User need add interface to VLAN ID tagged member manually.
QoS Policy	Select port QoS Policy mode <ul style="list-style-type: none"> • Voice Packet: QoS attributes are applied to packets with OUIs in the source MAC address. • All: QoS attributes are applied to packets that are classified to the Voice VLAN.

4.5.2.2. Voice OUI

This page allow user to add, edit or delete OUI MAC addresses. Default has 8 pre-defined OUI MAC.

To view the Voice OUI menu, navigate to VLAN > Voice VLAN > Voice OUI.

Voice OUI Table

Showing entries Showing 1 to 8 of 8 entries

<input type="checkbox"/>	OUI	Description
<input type="checkbox"/>	00:E0:BB	3COM
<input type="checkbox"/>	00:03:6B	Cisco
<input type="checkbox"/>	00:E0:75	Veritel
<input type="checkbox"/>	00:D0:1E	Pingtel
<input type="checkbox"/>	00:01:E3	Siemens
<input type="checkbox"/>	00:60:B9	NEC/Philips
<input type="checkbox"/>	00:0F:E2	H3C
<input type="checkbox"/>	00:09:6E	Avaya

Figure 51 - VLAN > Voice VLAN > Voice OUI

Item	Description
OUI	Display OUI MAC address.
Description	Display description of OUI entry.

Click “Add” or “Edit” button to Add/Edit Voice OUI menu.

Add Voice OUI

OUI	<input type="text"/> : <input type="text"/> : <input type="text"/>
Description	<input type="text"/>

Apply Close

Edit Voice OUI

OUI	00:60:B9
Description	NEC/Philips

Apply Close

Figure 52 - VLAN > Voice VLAN > Voice OUI > Add/Edit Voice OUI

Item	Description
OUI	Input OUI MAC address. Can’ t be edited in edit dialog.
Description	Input description of the specified MAC address to the voice VLAN OUI table.

4.5.3. MAC VLAN

Use the MAC VLAN pages to configure settings of MAC VLAN.

4.5.3.1. MAC Group

This page allow user to add or edit groups settings of MAC VLAN.

To view the MAC menu, navigate to VLAN > MAC VLAN > MAC Group.

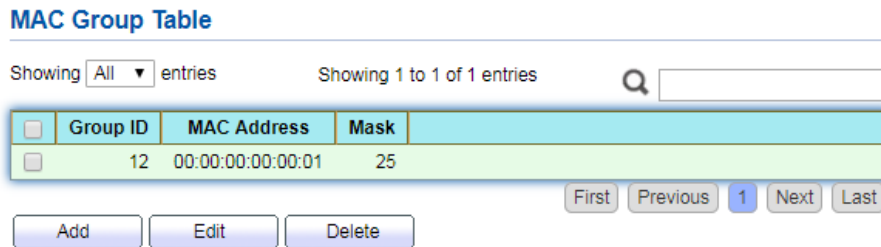


Figure 53 - VLAN > MAC VLAN > MAC Group

Item	Description
Group ID	Display group ID of entry.
MAC Address	Display mac address of entry.
Mask	Display mask of mac address for classified packet.

Click "Add" button or "Edit" button to view Add/Edit MAC menu.

Add MAC Group

Group ID	<input type="text"/>	(1 - 2147483647)
MAC Address	<input type="text"/>	
Mask	<input type="text"/>	(9 - 48)

Edit MAC Group

Group ID	22	
MAC Address	<input type="text" value="12:23:34:45:34:34"/>	
Mask	<input type="text" value="23"/>	(9 - 48)

Figure 54 - VLAN > MAC VLAN > MAC Group > Add/Edit MAC

Item	Description
Group ID	Input group ID that is a unique ID of mac group entry. The range from 1 to 2147483647. Only available on Add Dialog.
MAC Address	Input mac address for classifying packets.
Mask	Input mask of mac address.

4.5.3.2. Group Binding

This page allow user to bind MAC VLAN group to each port with VLAN ID.

To view the Group Binding Table menu, navigate to VLAN > MAC VLAN > Group Binding.

Group Binding Table

Showing All entries Showing 1 to 2 of 2 entries

<input type="checkbox"/>	Port	Group ID	VLAN
<input type="checkbox"/>	GE1	10	1
<input type="checkbox"/>	GE3	10	1

 1

Figure 55 - VLAN > MAC VLAN > Group Binding

Item	Description
Port	Display port ID that binding with MAC group entry.
Group ID	Display group ID that port binding with.
VLAN	Display VLAN ID that assign to packets which match MAC group.

Click "Add" button to view the Add Group Binding menu.

Add Group Binding

	Available Port GE2 GE3	> <	Selected Port GE1
Port	Note: Only VLAN Hybrid port can be set MAC VLAN		
Group ID	10		
VLAN	<input type="text"/> (1 - 4094)		

Figure 56 - VLAN > MAC VLAN > Group Binding


Item	Description
Port	Select ports in left box then move to right to binding with MAC group. Or select ports in right box then move to left to unbind with MAC group. Only interface has hybrid VLAN mode can be selected and bound with protocol group. Only available on Add dialog.
Group ID	Select a Group ID to associate with port. Only available on Add dialog.
VLAN	Input VLAN ID that will assign to packets which match MAC group.

4.6. MAC Address Table

Use the MAC Address Table pages to show dynamic MAC table and configure settings for static MAC entries.

4.6.1. Dynamic Address

To view the Dynamic Address menu, navigate to MAC Address Table > Dynamic Address.

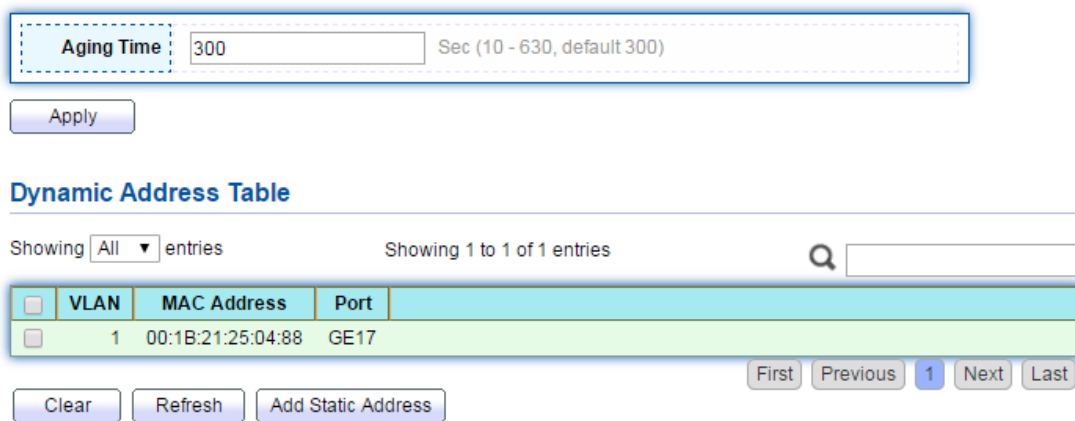

Aging Time: 300 Sec (10 - 630, default 300)

Apply

Dynamic Address Table

Showing All entries Showing 1 to 1 of 1 entries

<input type="checkbox"/>	VLAN	MAC Address	Port
<input type="checkbox"/>	1	00:1B:21:25:04:88	GE17

First Previous 1 Next Last

Clear Refresh Add Static Address

Figure 57 - MAC Address Table > Dynamic Address

Item	Description
Aging Time	The time in seconds that an entry remains in the MAC address table. Its valid range is from 10 to 630 seconds, and the default value is 300 seconds.

4.6.2. Static Address

To view the Static Address menu, navigate to MAC Address Table > Static Address.

Static Address Table

Showing entries Showing 1 to 1 of 1 entries

<input type="checkbox"/>	VLAN	MAC Address	Port
<input type="checkbox"/>	1	00:1B:21:25:04:88	GE17

Figure 58 - MAC Address Table > Static Address.

Item	Description
MAC Address	The MAC address to which packets will be statically forwarded.
VLAN	Specify the VLAN to show or clear MAC entries.
Port	Interface or port number.

4.6.3. Filtering Address

To view the Filtering Address menu, navigate to MAC Address Table > Filtering Address.

Static Address Table

Showing entries Showing 1 to 1 of 1 entries

<input type="checkbox"/>	VLAN	MAC Address	Port
<input type="checkbox"/>	1	00:1B:21:25:04:88	GE17

Figure 59 - MAC Address Table > Filtering Address.

Item	Description
MAC Address	Specify unicast MAC address in the packets to be dropped.
VLAN	Specify the VLAN to show or clear MAC entries.

4.7. Spanning Tree

The Spanning Tree Protocol (STP) is a network protocol that ensures a loop-free topology for any bridged Ethernet local area network.

4.7.1. Property

To view the Property menu, navigate to Spanning Tree > Property.

State	<input type="checkbox"/> Enable
Operation Mode	<input type="radio"/> STP <input checked="" type="radio"/> RSTP <input type="radio"/> MSTP
Path Cost	<input checked="" type="radio"/> Long <input type="radio"/> Short
BPDU Handling	<input type="radio"/> Filtering <input checked="" type="radio"/> Flooding
Priority	<input type="text" value="32768"/> (0 - 61440, default 32768)
Hello Time	<input type="text" value="2"/> Sec (1 - 10, default 2)
Max Age	<input type="text" value="20"/> Sec (6 - 40, default 20)
Forward Delay	<input type="text" value="15"/> Sec (4 - 30, default 15)
Tx Hold Count	<input type="text" value="6"/> (1 - 10, default 6)
Region Name	<input type="text" value="00:E0:4C:00:00:00"/>
Revision	<input type="text" value="0"/> (0 - 65535, default 0)
Max Hop	<input type="text" value="20"/> (1 - 40, default 20)
Operational Status	
Bridge Identifier	32768-00:E0:4C:00:00:00
Designated Root Bridge	0-00:00:00:00:00:00
Root Port	N/A
Root Path Cost	0
Topology Change Count	0
Last Topology Change	0D/0H/0M/0S

Figure 60 - Spanning Tree > Property

Item	Description
State	Enable/disable the STP on the switch.
Operation Mode	Specify the STP operation mode. <ul style="list-style-type: none"> • STP: Enable the Spanning Tree (STP) operation. • RSTP: Enable the Rapid Spanning Tree (RSTP) operation. • MSTP: Enable the Multiple Spanning Tree (MSTP) operation.
Path Cost	Specify the path cost method. <ul style="list-style-type: none"> • Long: Specifies that the default port path costs are within the range:1-200,000,000. • Short: Specifies that the default port path costs are within the range:1-65,535.
BPDU Handling	Specify the BPDU forward method when the STP is disabled. <ul style="list-style-type: none"> • Filtering: Filter the BPDU when STP is disabled. • Flooding: Flood the BPDU when STP is disabled.
Priority	Specify the bridge priority. The valid range is from 0 to 61440, and the value should be the multiple of 4096. It ensures the probability that the switch is selected as the root bridge, and the lower value has the higher priority for the switch to be selected as the root bridge of the topology.
Hello Time	Specify the STP hello time in second to broadcast its hello message to other bridges by Designated Ports. Its valid range is from 1 to 10 seconds.
Max Age	Specify the time interval in seconds for a switch to wait the configuration messages, without attempting to redefine its own configuration.

Forward Delay	Specify the STP forward delay time, which is the amount of time that a port remains in the Listening and Learning states before it enters the Forwarding state. Its valid range is from 4 to 10 seconds.
TX Hold Count	Specify the tx-hold-count used to limit the maximum numbers of packets transmission per second. The valid range is from 1 to 10.
Region Name	The MSTP instance name. Its maximum length is 32 characters. The default value is the MAC address of the switch.
Revision	The MSTP revision number. Its valid range is from 0 to 65535.
Max Hop	Specify the number of hops in an MSTP region before the BPDU is discarded. The valid range is 1 to 40.
Operational Status	
Bridge Identifier	Bridge identifier of the switch.
Designated Root Identifier	Bridge identifier of the designated root bridge.
Root Port	Operational root port of the switch.
Root Path Cost	Operational root path cost.
Topology Change Count	Numbers of the topology changes.
Last Topology Change	The last time for the topology change.

4.7.2. Port Setting

To view the Port Setting menu, navigate to Spanning Tree > Port Setting.

Port Setting Table

Entry	Port	State	Path Cost	Priority	BPDU Filter	BPDU Guard	Operational Edge	Operational Point-to-Point	Port Role	Port State	Designated Bridge	Designated Port ID	Designated Cost
1	GE1	Enabled	20000	128	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	0-00:00:00:00:00:00	128-1	20000
2	GE2	Enabled	20000	128	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	0-00:00:00:00:00:00	128-2	20000
3	GE3	Enabled	20000	128	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	0-00:00:00:00:00:00	128-3	20000
4	GE4	Enabled	20000	128	Disabled	Disabled	Disabled	Disabled	Disabled	Disabled	0-00:00:00:00:00:00	128-4	20000

Figure 61 - Spanning Tree > Port Setting

Item	Description
Port	Specify the interface ID or the list of interface IDs.
State	The operational state on the specified port.
Path Cost	STP path cost on the specified port.
Priority	STP priority on the specified port.
BPDU Filter	The states of BPDU filter on the specified port.
BPDU Guard	The states of BPDU guard on the specified port.
Operational Edge	The operational edge port status on the specified port.
Operational Point-to-Point	The operational point-to-point status on the specified port.
Port Role	The current port role on the specified port. The possible values are: “Disabled” , “Master” , “Root” , “Designated” , “Alternative” , and “Backup” .
Port State	The current port state on the specified port. The possible values are: “Disabled” , “Discarding” , “Learning” ,

	and “Forwarding” .
Designated Bridge	The bridge ID of the designated bridge.
Designated Port ID	The designated port ID on the switch.
Designated Cost	The path cost of the designated port on the switch.
Protocol Migration Check	Restart the Spanning Tree Protocol (STP) migration process (re-negotiate with its neighborhood) on the specific interface.

Click "Edit" button to view Edit Port Setting menu.

Edit Port Setting

Port	GE17
State	<input checked="" type="checkbox"/> Enable
Path Cost	<input type="text" value="0"/> (0 - 200000000) (0 = Auto)
Priority	<input type="text" value="128"/> ▼
Edge Port	<input type="checkbox"/> Enable
BPDU Filter	<input type="checkbox"/> Enable
BPDU Guard	<input type="checkbox"/> Enable
Point-to-Point	<input checked="" type="radio"/> Auto <input type="radio"/> Enable <input type="radio"/> Disable
Port State	Forwarding
Designated Bridge	0-00:00:00:00:00:00
Designated Port ID	128-17
Designated Cost	20000
Operational Edge	False
Operational Point-to-Point	True

Figure 62 - Spanning Tree > Port Setting > Edit Port Setting

Item	Description
Port	Selected port ID.
State	Enable/Disable the STP on the specified port.
Path Cost	Specify the STP path cost on the specified port.
Priority	Specify the STP path cost on the specified port.
Edge Port	<p>Specify the edge mode.</p> <ul style="list-style-type: none"> • Enable: Force to true state (as link to a host). • Disable: Force to false state (as link to a bridge). <p>In the edge mode, the interface would be put into the Forwarding state immediately upon link up. If the edge mode is enabled for the interface and there are BPDUs received on the interface, the loop might be occurred in the short time before the STP state change.</p>
BPDU Filter	<p>The BPDU Filter configuration avoids receiving / transmitting BPDU from the specified ports.</p> <ul style="list-style-type: none"> • Enable: Enable BPDU filter function. • Disable: Disable BPDU filter function.
BPDU Guard	<p>The BPDU Guard configuration to drop the received BPDU directly.</p> <ul style="list-style-type: none"> • Enable: Enable BPDU guard function. • Disable: Disable BPDU guard function.
Point-to-Point	<p>Specify the Point-to-Point port configuration:</p> <ul style="list-style-type: none"> • Auto: The state is depended on the duplex setting of the port • Enable: Force to true state. • Disable: Force to false state

4.7.3. MST Instance

To view the MST Instance menu, navigate to Spanning Tree > MST Instance.

MST Instance Table

MSTI	Priority	Bridge Identifier	Designated Root Bridge	Root Port	Root Path Cost	Remaining Hop	VLAN
0	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	1-4094
1	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
2	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
3	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
4	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
5	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
6	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
7	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
8	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
9	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
10	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
11	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
12	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
13	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
14	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	
15	32768	32768-00:E0:4C:00:00:00	0-00:00:00:00:00:00	N/A	0	0	

Figure 63 - Spanning Tree > MST Instance

Item	Description
MSTI	Designated port number.
Priority	The bridge priority on the specified MSTI.
Bridge Identifier	The bridge identifier on the specified MSTI.
Designated Root Bridge	The designated root bridge identifier on the specified MSTI.
Root Port	The designated root port on the specified MSTI.
Root Path Cost	The designated root path cost on the specified MSTI.
Remaining Hop	The configuration of remaining hop on the specified MSTI.
VLAN	The VLAN configuration on the specified MSTI.

Click "Edit" button to view Edit MST Instance menu.

Edit MST Instance Setting

MSTI	9	
VLAN	Available VLAN	Selected VLAN
	1 2 3 4 5 6 7 8	[Empty]
Priority	32768 (0 - 61440, default 32768)	
Bridge Identifier	32768-00:E0:4C:00:00:00	
Designated Root Bridge	0-00:00:00:00:00:00	
Root Port		
Root Path Cost	0	
Remaining Hop	0	

Figure 64 - Spanning Tree > MST Instance > Edit MST Instance Setting

Item	Description
VLAN	Select the VLAN list for the specified MSTI.
Priority	Specify the bridge priority on the specified MSTI. The valid range is from 0 to 61440, and the value must be the multiple of 4096. It ensures the probability that the switch is selected as the root bridge, and the lower values has the higher priority for the switch to be selected as the root bridge of the STP topology.

4.7.4. MST Port Setting

To view the MST Port Setting menu, navigate to Spanning Tree > MST Port Setting.

MST Port Setting Table

MSTI 3 Q

<input type="checkbox"/>	Entry	Port	Path Cost	Priority	Port Role	Port State	Mode	Type	Designated Bridge	Designated Port ID	Designated Cost	Remaining Hop
<input type="checkbox"/>	1	GE1	20000	128	Disabled	Disabled	RSTP	Boundary	0-00:00:00:00:00:00	128-1	20000	20
<input type="checkbox"/>	2	GE2	20000	128	Disabled	Disabled	RSTP	Boundary	0-00:00:00:00:00:00	128-2	20000	20
<input type="checkbox"/>	3	GE3	20000	128	Disabled	Disabled	RSTP	Boundary	0-00:00:00:00:00:00	128-3	20000	20
<input type="checkbox"/>	34	LAG6	20000	128	Disabled	Disabled	RSTP	Boundary	0-00:00:00:00:00:00	128-34	20000	20
<input type="checkbox"/>	35	LAG7	20000	128	Disabled	Disabled	RSTP	Boundary	0-00:00:00:00:00:00	128-35	20000	20
<input type="checkbox"/>	36	LAG8	20000	128	Disabled	Disabled	RSTP	Boundary	0-00:00:00:00:00:00	128-36	20000	20

Figure 65 - Spanning Tree > MST Port Setting

Item	Description
MSTI	Specify the port setting on the specified MSTI.
Port	Specify the interface ID or the list of interface IDs.
Path Cost	The port path cost on the specified MSTI.
Priority	The port priority on the specified MSTI.
Port Role	The current port role on the specified port. The possible values are: “Disabled” , “Master” , “Root” , “Designated” , “Alternative” , and “Backup” .
Port State	The current port state on the specified port. The possible values are: “Disabled” , “Discarding” , “Learning” , and “Forwarding” .
Mode	The operational STP mode on the specified port.
Type	The possible value for the port type are: <ul style="list-style-type: none"> Boundary: The port attaching an MST Bridge to a LAN that

	is not in the same region. <ul style="list-style-type: none"> • Internal: The port attaching an MST Bridge to a LAN that is not in the same region.
Designated Bridge	The bridge ID of the designated bridge.
Designated Port ID	The designated port ID on the switch.
Designated Cost	The path cost of the designated port on the switch.
Remaining Hop	The remaining hops count on the specified port.

Click "Edit" button to view Edit MST Port Setting menu.

Edit MST Port Setting

MSTI	3
Port	GE17
Path Cost	<input type="text" value="0"/> (0 - 200000000) (0 = Auto)
Priority	128 ▼
Port Role	Disabled
Port State	Forwarding
Mode	RSTP
Type	Boundary
Designated Bridge	0-00:00:00:00:00:00
Designated Port ID	128-17
Designated Cost	20000
Remaining Hop	20

Figure 66 - Spanning Tree > MST Port Setting > Edit MST Port Setting

Item	Description
Path Cost	Specify the STP port path cost on the specified MSTI.
Priority	Specify the STP port priority on the specified MSTI.

4.7.5. Statistics

To view the Statistics menu, navigate to Spanning Tree > Statistics.

Statistics Table

Refresh Rate sec

	Entry	Port	Receive BPDU			Transmit BPDU		
			Config	TCN	MSTP	Config	TCN	MSTP
<input type="checkbox"/>	1	GE1	0	0	0	0	0	0
<input type="checkbox"/>	2	GE2	0	0	0	0	0	0
<input type="checkbox"/>	3	GE3	0	0	0	0	0	0
<input type="checkbox"/>	35	LAG7	0	0	0	0	0	0
<input type="checkbox"/>	36	LAG8	0	0	0	0	0	0

Figure 67 - Spanning Tree > Statistics

Item	Description
Refresh Rate	The option to refresh the statistics automatically.
Receive BPDU (Config)	The counts of the received CONFIG BPDU.
Receive BPDU (TCN)	The counts of the received TCN BPDU.
Receive BPDU (MSTP)	The counts of the received MSTP BPDU.
Transmit BPDU (Config)	The counts of the transmitted CONFIG BPDU.
Transmit BPDU (TCN)	The counts of the transmitted TCN BPDU.
Transmit BPDU (MSTP)	The counts of the transmitted MSTP BPDU.

Clear	Clear the statistics for the selected interfaces
View	View the statistics for the interface.

Click "View" button to view the STP Port Statistic menu.

STP Port Statistic

Port	GE17
Refresh Rate	<input checked="" type="radio"/> None <input type="radio"/> 5 sec <input type="radio"/> 10 sec <input type="radio"/> 30 sec
Receive BPDU	
Config	0
TCN	0
MSTP	0
Transmit BPDU	
Config	0
TCN	0
MSTP	0

Figure 68 - Spanning Tree > Statistics > STP Port Statistic

Item	Description
Refresh Rate	The option to refresh the statistics automatically.
Clear	Clear the statistics for the selected interfaces.

4.8. Discovery

Use this section to configure LLDP.

4.8.1. LLDP

LLDP is a one-way protocol; there are no request/response sequences. Information is advertised by stations implementing the transmit function, and is received and processed by stations implementing the receive function. The LLDP category contains LLDP and LLDP-MED pages.

4.8.1.1. Property

To view the Property menu, navigate to Discovery > LLDP > Property.

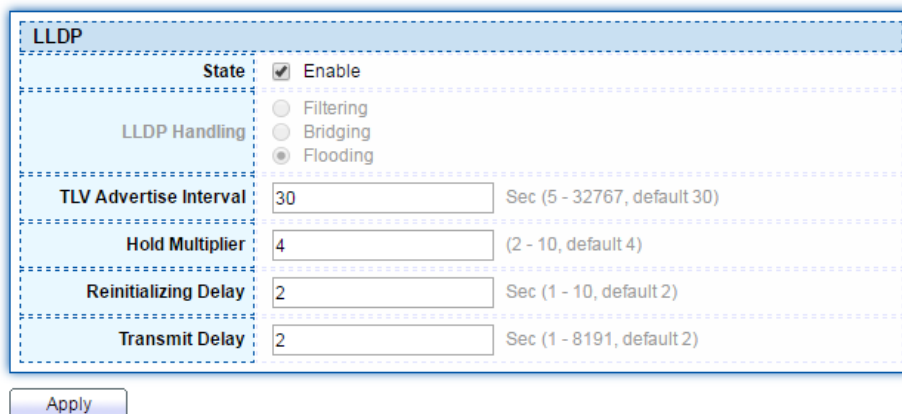


Figure 69 - Discovery > LLDP > Property

Item	Description
State	Enable/ Disable LLDP protocol on this switch.
LLDP Handling	Select LLDP PDU handling action to be filtered, bridging or flooded when LLDP is globally disabled. <ul style="list-style-type: none"> Filtering: Deletes the packet.

	<ul style="list-style-type: none"> • Bridging: (VLAN-aware flooding) Forwards the packet to all VLAN members. • Flooding: Forwards the packet to all ports
TLV Advertise Interval	Select the interval at which frames are transmitted. The default is 30 seconds, and the valid range is 5-32767 seconds.
Holdtime Multiplier	Select the multiplier on the transmit interval to assign to TTL (range 2-10, default = 4).
Reinitialization Delay	Select the delay before a re-initialization (range 1-10 seconds, default = 2).
Transmit Delay	Select the delay after an LLDP frame is sent (range 1-8191 seconds, default = 3).

4.8.1.2. Port Setting

To view the Port Setting menu, navigate to Discovery > LLDP > Port Setting.

Port Setting Table

<input type="checkbox"/>	Entry	Port	Mode	Selected TLV
<input type="checkbox"/>	1	GE1	Normal	802.1 PVID
<input type="checkbox"/>	2	GE2	Normal	802.1 PVID
<input type="checkbox"/>	3	GE3	Normal	802.1 PVID
<input type="checkbox"/>	4	GE4	Normal	802.1 PVID
<input type="checkbox"/>	5	GE5	Normal	802.1 PVID
<input type="checkbox"/>	6	GE6	Normal	802.1 PVID
<input type="checkbox"/>	7	GE7	Normal	802.1 PVID
<input type="checkbox"/>	8	GE8	Normal	802.1 PVID
<input type="checkbox"/>	9	GE9	Normal	802.1 PVID
<input type="checkbox"/>	10	GE10	Normal	802.1 PVID
<input type="checkbox"/>	11	GE11	Normal	802.1 PVID
<input type="checkbox"/>	12	GE12	Normal	802.1 PVID
<input type="checkbox"/>	13	GE13	Normal	802.1 PVID
<input type="checkbox"/>	14	GE14	Normal	802.1 PVID
<input type="checkbox"/>	15	GE15	Normal	802.1 PVID
<input type="checkbox"/>	16	GE16	Normal	802.1 PVID
<input type="checkbox"/>	17	GE17	Normal	802.1 PVID
<input type="checkbox"/>	18	GE18	Normal	802.1 PVID
<input type="checkbox"/>	19	GE19	Normal	802.1 PVID
<input type="checkbox"/>	20	GE20	Normal	802.1 PVID
<input type="checkbox"/>	21	GE21	Normal	802.1 PVID
<input type="checkbox"/>	22	GE22	Normal	802.1 PVID
<input type="checkbox"/>	23	GE23	Normal	802.1 PVID
<input type="checkbox"/>	24	GE24	Normal	802.1 PVID
<input type="checkbox"/>	25	GE25	Normal	802.1 PVID
<input type="checkbox"/>	26	GE26	Normal	802.1 PVID
<input type="checkbox"/>	27	GE27	Normal	802.1 PVID
<input type="checkbox"/>	28	GE28	Normal	802.1 PVID

Figure 70 - Discovery > LLDP > Port Setting

Item	Description
Port	Port Name.
Mode	The port LLDP mode.
Selected TLV	The Selected LLDP TLV.

Click "Edit" button to view Edit Port Setting menu.

Edit Port Setting

Port GE17

Mode

Transmit
 Receive
 Normal
 Disable

Optional TLV

Available TLV: Port Description, System Name, System Description, System Capabilities, 802.3 MAC-PHY

Selected TLV: 802.1 PVID

802.1 VLAN Name

Available VLAN: VLAN 1

Selected VLAN:

Apply Close

Figure 71 - Discovery > LLDP > Port Setting > Edit Port Setting

Item	Description
Port	Select specified port or all ports to configure LLDP state.
Mode	Select the transmission state of LLDP port interface. <ul style="list-style-type: none"> • Disable: Disable the transmission of LLDP PDUs. • RX Only: Receive LLDP PDUs only. • TX Only: Transmit LLDP PDUs only. • TX And RX: Transmit and receive LLDP PDUs both.
Optional TLV	Select the LLDP optional TLVs to be carried (multiple selection is allowed). <ul style="list-style-type: none"> • System Name

	<ul style="list-style-type: none">• Port Description• System Description• System Capability• 802.3 MAC-PHY• 802.3 Link Aggregation• 802.3 Maximum Frame Size• Management Address• 802.1 PVID.
802.1 VLAN Name	Select the VLAN Name ID to be carried (multiple selection is allowed).

4.8.1.3. Packet View

To view the Packet View menu, navigate to Discovery > LLDP > Packet View.

Packet View Table

	Entry	Port	In-Use (Bytes)	Available (Bytes)	Operational Status
<input type="radio"/>	1	GE1	48	1440	Not Overloading
<input type="radio"/>	2	GE2	48	1440	Not Overloading
<input type="radio"/>	3	GE3	48	1440	Not Overloading
<input type="radio"/>	4	GE4	48	1440	Not Overloading
<input type="radio"/>	5	GE5	48	1440	Not Overloading
<input type="radio"/>	6	GE6	48	1440	Not Overloading
<input type="radio"/>	7	GE7	48	1440	Not Overloading
<input type="radio"/>	8	GE8	48	1440	Not Overloading
<input type="radio"/>	9	GE9	48	1440	Not Overloading
<input type="radio"/>	10	GE10	49	1439	Not Overloading
<input type="radio"/>	11	GE11	49	1439	Not Overloading
<input type="radio"/>	12	GE12	49	1439	Not Overloading
<input type="radio"/>	13	GE13	49	1439	Not Overloading
<input type="radio"/>	14	GE14	49	1439	Not Overloading
<input type="radio"/>	15	GE15	49	1439	Not Overloading
<input type="radio"/>	16	GE16	49	1439	Not Overloading
<input type="radio"/>	17	GE17	49	1439	Not Overloading
<input type="radio"/>	18	GE18	49	1439	Not Overloading
<input type="radio"/>	19	GE19	49	1439	Not Overloading
<input type="radio"/>	20	GE20	49	1439	Not Overloading
<input type="radio"/>	21	GE21	49	1439	Not Overloading
<input type="radio"/>	22	GE22	49	1439	Not Overloading
<input type="radio"/>	23	GE23	49	1439	Not Overloading
<input type="radio"/>	24	GE24	49	1439	Not Overloading
<input type="radio"/>	25	GE25	49	1439	Not Overloading
<input type="radio"/>	26	GE26	49	1439	Not Overloading
<input type="radio"/>	27	GE27	49	1439	Not Overloading
<input type="radio"/>	28	GE28	49	1439	Not Overloading

Figure 72 - Discovery > LLDP > Packet View

Item	Description
Port	Port Name.
In-Use (Bytes)	Total number of bytes of LLDP information in each packet.
Available (Bytes)	Total number of available bytes left for additional LLDP information in each packet.
Operational Status	Overloading or not.

Click "Detail" button to view Packet View Detail menu.

Packet View Detail

Port	GE17
Mandatory TLVs	
Size (Bytes)	21
Operational Status	Transmitted
802.3 TLVs	
Size (Bytes)	0
Operational Status	Transmitted
Optional TLVs	
Size (Bytes)	0
Operational Status	Transmitted
802.1 TLVs	
Size (Bytes)	8
Operational Status	Transmitted
Total	
In-Use (Bytes)	48
Available (Bytes)	1440

Close

Figure 73 - Discovery > LLDP > Packet View > Packet View Detail

Item	Description
Port	Port Name.
Mandatory TLVs	Total mandatory TLV byte size. Status is sent or overloading.
802.3 TLVs	Total 802.3 TLVs byte size. Status is sent or overloading.
Optional TLVs	Total Optional TLV byte size. Status is sent or overloading.
802.1 TLVs	Total 802.1 TLVs byte size. Status is sent or overloading.
Total	Total number of bytes of LLDP information in each packet.

4.8.1.4. Local Information

Use the LLDP Local Information to view LLDP local device information.

To view the Local Information menu, navigate to Discovery > LLDP > Local Information.

Device Summary

Chassis ID Subtype	MAC address
Chassis ID	00:ED:4C:00:00:00
System Name	Switch
System Description	AZTECA 1000 Series Switch
Supported Capabilities	Bridge
Enabled Capabilities	Bridge
Port ID Subtype	Local

Port Status Table

Entry	Port	LLDP State
1	GE1	Normal
2	GE2	Normal
27	GE27	Normal
28	GE28	Normal

[Detail](#)

Figure 74 - Discovery > LLDP > Local Information

Item	Description
Chassis ID Subtype	Type of chassis ID, such as the MAC address.
Chassis ID	Identifier of chassis. Where the chassis ID subtype is a MAC address, the MAC address of the switch is displayed.
System Name	Name of switch.
System Description	Description of the switch.
Capabilities Supported	Primary functions of the device, such as Bridge, WLAN AP, or Router.

Capabilities Enabled	Primary enabled functions of the device.
Port ID Subtype	Type of the port identifier that is shown.
LLDP Status	LLDP Tx and Rx abilities.
LLDP Med Status	LLDP MED enable state.

Click “Detail” button on the page to view detail information of the selected port.

Local Information Detail

Chassis ID Subtype	MAC address
Chassis ID	00:E0:4C:00:00:00
System Name	Switch
System Description	AZTECA 1000 Series Switch
Supported Capabilities	Bridge
Enabled Capabilities	Bridge
Port ID	GE17
Port ID Subtype	Local
Port Description	

Management Address Table				
Address Subtype	Address	Interface Subtype	Interface Number	
0 results found.				

MAC/PHY Detail	
Auto-Negotiation Supported	N/A
Auto-Negotiation Enabled	N/A
Auto-Negotiation Advertised Capabilities	N/A
Operational MAU Type	N/A

802.3 Detail	
802.3 Maximum Frame Size	N/A

802.3 Link Aggregation	
Aggregation Capability	N/A
Aggregation Status	N/A
Aggregation Port ID	N/A


Close

Figure 75 - Discovery > LLDP > Local Information > Detail

4.8.1.5. Neighbor

Use the LLDP Neighbor page to view LLDP neighbors information.

To view the Neighbor menu, navigate to Discovery > LLDP > Neighbor.

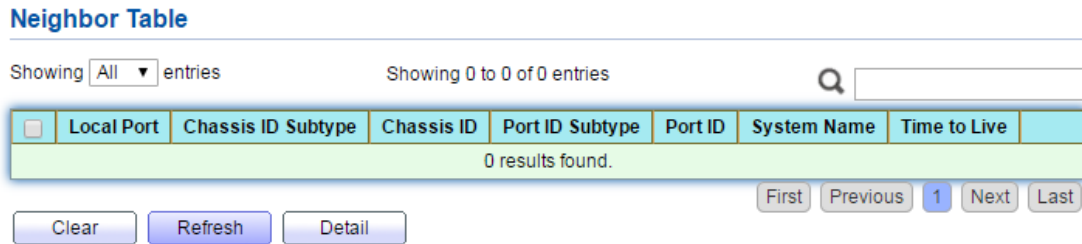

Neighbor Table

Showing entries Showing 0 to 0 of 0 entries

<input type="checkbox"/>	Local Port	Chassis ID Subtype	Chassis ID	Port ID Subtype	Port ID	System Name	Time to Live
0 results found.							

Figure 76 - Discovery > LLDP > Neighbor

Item	Description
Local Port	Number of the local port to which the neighbor is connected.
Chassis ID Subtype	Type of chassis ID (for example, MAC address).
Port ID Subtype	Type of the port identifier that is shown.
Port ID	Identifier of port.
System Name	Published name of the switch.
Time to Live	Time interval in seconds after which the information for this neighbor is deleted.

4.8.5.6. Statistics

The Link Layer Discovery Protocol (LLDP) Statistics page displays summary and per-port information for LLDP frames transmitted and received on the switch.

To view the Statistics menu, navigate to Discovery > LLDP > Statistics.

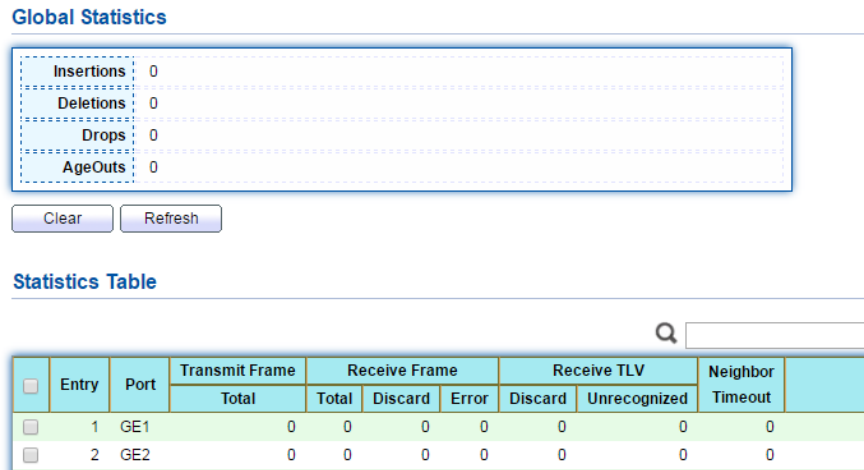


Figure 77 - Discovery > LLDP > Statistics

Item	Description
Insertions	The number of times the complete set of information advertised by a particular MAC Service Access Point (MSAP) has been inserted into tables associated with the remote systems.
Deletions	The number of times the complete set of information advertised by MSAP has been deleted from tables associated with the remote systems.
Drops	The number of times the complete set of information advertised by MSAP could not be entered into tables associated with the remote systems because of insufficient resources.
Age Outs	The number of times the complete set of information advertised by MSAP has been deleted from tables

	associated with the remote systems because the information timeliness interval has expired.
Statistics Table	
Port	Interface or port number.
Transmit Frame Total	Number of LLDP frames transmitted on the corresponding port.
Receive Frame Total	Number of LLDP frames received by this LLDP agent on the corresponding port, while the LLDP agent is enabled.
Receive Frame Discard	Number of LLDP frames discarded for any reason by the LLDP agent on the corresponding port.
Receive Frame Error	Number of invalid LLDP frames received by the LLDP agent on the corresponding port, while the LLDP agent is enabled.
Receive TLV Discard	Number of TLVs of LLDP frames discarded for any reason by the LLDP agent on the corresponding port.
Receive TLV Unrecognized	Number of TLVs of LLDP frames that are unrecognized while the LLDP agent is enabled.
Neighbor Timeout	Number of age out LLDP frames.

4.9. Multicast

Use this section to configure Multicast.

4.9.1. General

Use the General pages to configure settings of IGMP and MLD common function.

4.9.1.1. Property

To view the Property menu, navigate to Multicast > General> Property.

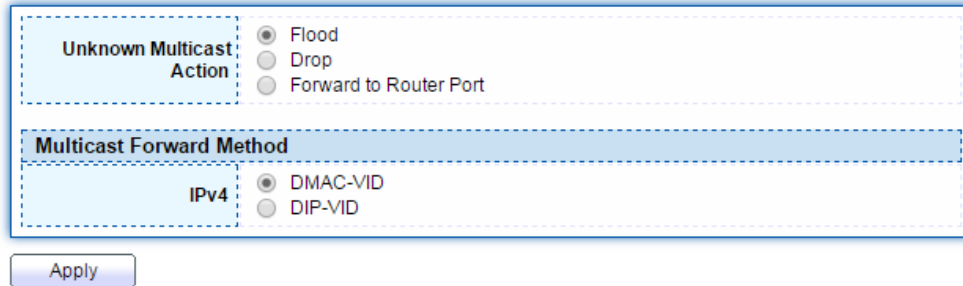


Figure 78 - Multicast > General > Property

Item	Description
Unknown Multicast Action	Set the unknown multicast action <ul style="list-style-type: none"> • Flood: flood the unknown multicast data. • Drop: drop the unknown multicast data. • Router port: forward the unknown multicast data to router port.
IPv4	Set the ipv4 multicast forward method. <ul style="list-style-type: none"> • MAC-VID: forward method dmac+vid. • DIP-VID: forward method dip+vid.

4.9.1.2. Group Address

This page allow user to browse all multicast groups that dynamic learned or statically added.

To view the Group Address menu, navigate to Multicast > General > Group Address.

Group Address Table

IP Version

Showing entries Showing 0 to 0 of 0 entries

<input type="checkbox"/>	VLAN	Group Address	Member	Type	Life (Sec)
0 results found.					

Figure 79 - Multicast > General > Group Address

Item	Description
IP Version	IP Version <ul style="list-style-type: none"> IPv4: ipv4 multicast group IPv6: ipv6 multicast group
VLAN	The VLAN ID of group.
Group Address	The group IP address.
Member	The member ports of group.
Type	The type of group. Static or Dynamic.
Life(Sec)	The life time of this dynamic group.

Click "Add" button to view Add Group Address menu.

Add Group Address

VLAN	1 ▼	
IP Version	IPv4 ▼	
Group Address	<input type="text"/>	
Member	Available Port	Selected Port
	GE1 GE2 GE3 GE4 GE5 GE6 GE7 GE8	<input type="text"/>

Figure 80 - Multicast > General > Group Address
> Add Group Address

Item	Description
VLAN	The VLAN ID of group.
IP Version	IP Version <ul style="list-style-type: none"> • IPv4: ipv4 multicast group • IPv6: ipv6 multicast group
Group Address	The group IP address.
Member	The member ports of group. <ul style="list-style-type: none"> • Available Port: Optional port member • Selected Port: Selected port member

4.9.1.3. Router Port

This page allow user to browse all router port information. The static and forbidden router port can set by user.

To view the Router Port menu, navigate to Multicast > General > Router Port.

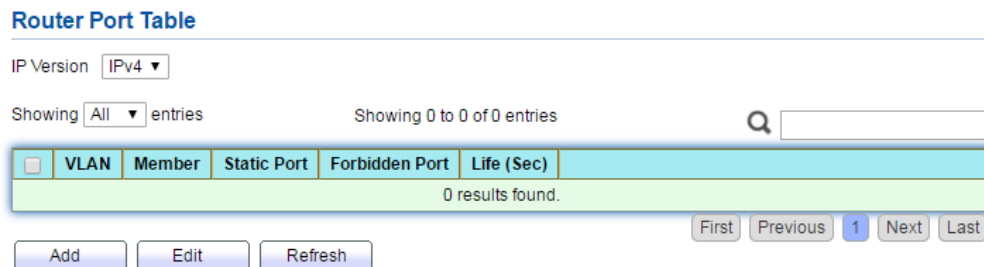


Figure 81 - Multicast > General > Router Port

Item	Description
IP Version	IP Version <ul style="list-style-type: none"> IPv4: ipv4 multicast router IPv6: ipv6 multicast router
VLAN	The VLAN ID router entry.
Member	Router Port member (include static and learned port member).
Static Port	Static router port member.
Forbidden Port	Forbidden router port member.
Life (Sec)	The expiry time of the router entry.

Click "Add" button to view Add Router Port menu.

Add Router Port

VLAN

Available VLAN

1

>

<

Selected VLAN

IP Version

IP Version: IPv4 ▾

Type

Type:

Static

Forbidden

Port

Available Port

GE1
GE2
GE3
GE4
GE5
GE6
GE7
GE8

>

<

Selected Port

Apply
Close

Figure 82 - Multicast > General > Router Port > Add Router Port

Item	Description
VLAN	The VLAN ID for router entry <ul style="list-style-type: none"> Available VLAN: Optional VLAN member Selected VLAN: Selected VLAN member.
IP Version	IP Version <ul style="list-style-type: none"> IPv4: ipv4 multicast router IPv6: ipv6 multicast router
Type	The router port type <ul style="list-style-type: none"> Static: static router port Forbidden: forbidden router port, can't learn dynamic router port member

Port	The member ports of router entry. <ul style="list-style-type: none"> • Available Port: Optional router port member • Selected Port: Selected router port member
------	---


4.9.2. IGMP Snooping

Use the IGMP Snooping pages to configure settings of IGMP snooping function.

4.9.2.1. Property

This page allow user to configure global settings of IGMP snooping and configure specific VLAN settings of IGMP Snooping.

To view the Property menu, navigate to Multicast > IGMP Snooping > Property.

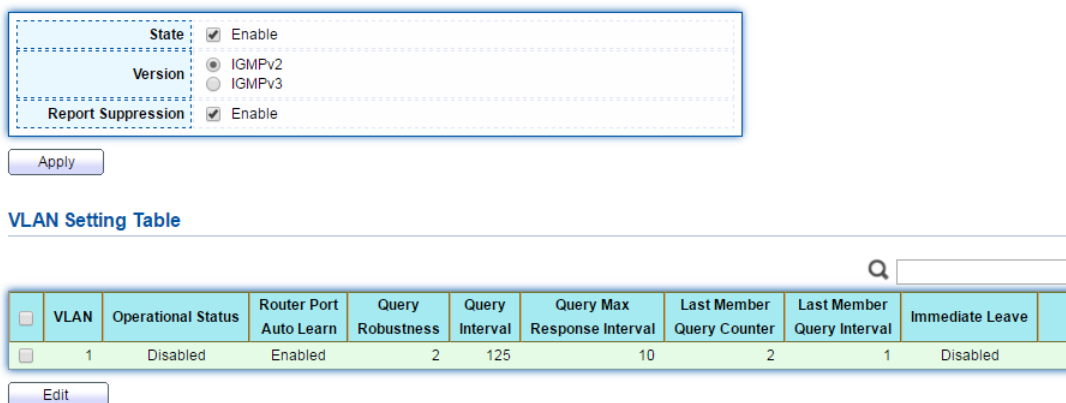

State Enable

Version IGMPv2 IGMPv3

Report Suppression Enable

Apply

VLAN Setting Table

VLAN	Operational Status	Router Port Auto Learn	Query Robustness	Query Interval	Query Max Response Interval	Last Member Query Counter	Last Member Query Interval	Immediate Leave
1	Disabled	Enabled	2	125	10	2	1	Disabled

Edit

Figure 83 - Multicast > IGMP Snooping > Property

Item	Description
State	Set the enabling status of IGMP Snooping functionality <ul style="list-style-type: none"> • Enable: If Checked Enable IGMP Snooping, else is Disabled IGMP Snooping.

Version	Set the igmp snooping version <ul style="list-style-type: none"> • IGMPv2: Only support process igmp v2 packet. • IGMPv3: Support v3 basic and v2.
Report Suppression	Set the enabling status of IGMP v2 report suppression <ul style="list-style-type: none"> • Enable: If Checked Enable IGMP Snooping v2 report suppression, else Disable the report suppression function.
VLAN	The IGMP entry VLAN ID.
Operation Status	The enable status of IGMP snooping VLAN functionality.
Router Port Auto Learn	The enabling status of IGMP snooping router port auto learning.
Query Robustness	The Query Robustness allows tuning for the expected packet loss on a subnet.
Query Interval	The interval of querier to send general query.
Query Max Response Interval	In Membership Query Messages, it specifies the maximum allowed time before sending a responding report in units of 1/10 second.
Last Member Query count	The count that Querier-switch sends Group-Specific Queries when it receives a Leave Group message for a group.
Last Member Query Interval	The interval that Querier-switch sends Group-Specific Queries when it receives a Leave Group message for a group.
Immediate leave	The immediate leave status of the group will immediate leave when receive IGMP Leave message.

Click "Edit" button to Edit VLAN Setting menu.

Edit VLAN Setting

VLAN	1
State	<input type="checkbox"/> Enable
Router Port Auto Learn	<input checked="" type="checkbox"/> Enable
Immediate leave	<input type="checkbox"/> Enable
Query Robustness	2 (1 - 7, default 2)
Query Interval	125 Sec (30 - 18000, default 125)
Query Max Response Interval	10 Sec (5 - 20, default 10)
Last Member Query Counter	2 (1 - 7, default 2)
Last Member Query Interval	1 Sec (1 - 25, default 1)
Operational Status	
Status	Disabled
Query Robustness	2
Query Interval	125 (Sec)
Query Max Response Interval	10 (Sec)
Last Member Query Counter	2
Last Member Query Interval	1 (Sec)

Figure 84 - Multicast > IGMP Snooping > Property > Edit VLAN Setting

Item	Description
VLAN	The selected VLAN List.
State	Set the enabling status of IGMP Snooping VLAN functionality <ul style="list-style-type: none"> • Enable: If Checked Enable IGMP Snooping VLAN, else is Disabled IGMP Snooping VLAN.
Router Port Auto Learn	Set the enabling status of IGMP Snooping router port learning <ul style="list-style-type: none"> • Enable: If checked Enable learning router port by query and PIM, DVRMP, else Disable the learning router port.
Immediate leave	Immediate Leave the group when receive IGMP Leave message.

	<ul style="list-style-type: none"> • Enable: If checked Enable immediate leave, else disable immediate leave.
Query Robustness	The Admin Query Robustness allows tuning for the expected packet loss on a subnet.
Query Interval	The Admin interval of querier to send general query.
Query Max Response Interval	The Admin query max response interval, In Membership Query Messages, it specifies the maximum allowed time before sending a responding report in units of 1/10 second.
Last Member Query Counter	The Admin last member query count that Querier-switch sends Group-Specific Queries when it receives a Leave Group message for a group.
Last Member Query Interval	The Admin last member query interval that Querier-switch sends Group-Specific Queries when it receives a Leave Group message for a group.
Operational Status	
Status	Operational IGMP snooping status, must both IGMP snooping global and IGMP snooping enable the status will be enable.
Query Robustness	Operational Query Robustness.
Query Interval	Operational Query Interval.
Query Max Response Interval	Operational Query Max Response Interval
Last Member Query Counter	Operational Last Member Query Count.

Last Member Query Interval	Operational Last Member Query Interval.
----------------------------	---

4.9.2.2. Querier

This page allow user to configure querier settings on specific VLAN of IGMP Snooping.

To view the Querier menu, navigate to Multicast > IGMP Snooping > Querier .

Querier Table

<input type="checkbox"/>	VLAN	State	Operational Status	Version	Querier Address
<input type="checkbox"/>	1	Disabled	Disabled		

Figure 85 - Multicast > IGMP Snooping > Querier

Item	Description
VLAN	IGMP Snooping querier entry VLAN ID.
State	The IGMP Snooping querier Admin State.
Operational Status	The IGMP Snooping querier operational status.
Querier Version	The IGMP Snooping querier operational version.
Querier IP	The operational Querier IP address on the VLAN.

Click "Edit" button to view Edit Querier menu.

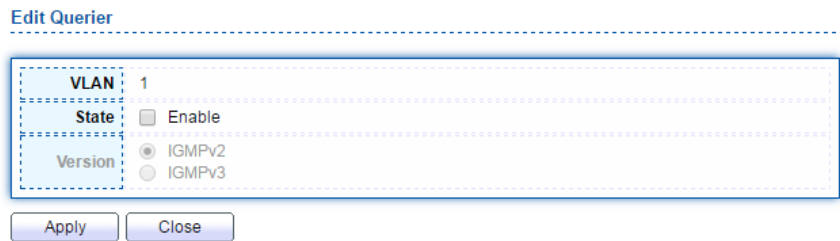


Figure 86 - Multicast > IGMP Snooping > Querier > Edit Querier

Item	Description
VLAN	The Selected Edit IGMP Snooping querier VLAN List.
State	Set the enabling status of IGMP Querier Election on the chose VLANs <ul style="list-style-type: none"> Enabled: if checked Enable IGMP Querier else Disable IGMP Querier.
Version	Set the query version of IGMP Querier Election on the chose VLANs <ul style="list-style-type: none"> IGMPv2: Querier version 2. IGMPv3: Querier version 3. (IGMP Snooping version should be IGMPv3)

4.9.2.3. Statistics

This page allow user to clear igmp snooping statics.

To view the Statistics menu, navigate to Multicast > IGMP Snooping > Statistics.

Receive Packet	
Total	120
Valid	1
InValid	119
Other	0
Leave	0
Report	0
General Query	0
Special Group Query	0
Source-specific Group Query	0
Transmit Packet	
Leave	0
Report	0
General Query	0
Special Group Query	0
Source-specific Group Query	0

Figure 87 - Multicast > IGMP Snooping > Statistics

Item	Description
Receive Packet	
Total	Total RX igmp packet, include ipv4 multicast data to CPU.
Valid	The valid igmp snooping process packet.
Invalid	The invalid igmp snooping process packet.
Other	The ICMP protocol is not 2, and is not ipv4 multicast data packet.
Leave	IGMP leave packet.
Report	IGMP join and report packet.
General Query	IGMP General Query packet.
Special Group Query	IGMP Special Group General Query packet.

Source-specific Group Query	IGMP Special Source and Group General Query packet.
Transmit Packet	
Leave	Report
General Query	IGMP general query packet include querier transmit general query packet.
Special Group Query	IGMP special group query packet include querier transmit special group query packet.
Source-specific Group Query	IGMP Special Source and Group General Query packet.

4.9.3. MVR

Use the MVR pages to configure settings of MVR function.

4.9.3.1. Property

To view the Property menu, navigate to Multicast > MVR > Property.

State	<input type="checkbox"/> Enable
VLAN	1
Mode	<input checked="" type="radio"/> Compatible <input type="radio"/> Dynamic
Group Start	0.0.0.0
Group Count	1 (1 - 128)
Query Time	1 Sec (1 - 10)
Operational Group	
Maximum	128
Current	0

Apply

Figure 88 - Multicast > MVR > Property

Item	Description
State	<ul style="list-style-type: none"> Enable: if checked enable the MVR state, else disable the MVR state.
VLAN	The MVR VLAN ID.
Mode	Set the MVR mode <ul style="list-style-type: none"> Compatible: compatible mode. Dynamic: dynamic mode, will learn group member on source port.
Group Start	MVR group range start.
Group Count	MVR group continue count.
Query Time	MVR query time when receive MVR leave MVR group packet.
Maximum	The max number of MVR group database.

4.9.3.2. Port Setting

To view the Port Setting menu, navigate to Multicast > MVR > Port Setting.

Port Setting Table

<input type="checkbox"/>	Entry	Port	Role	Immediate Leave
<input type="checkbox"/>	1	GE1	None	Disabled
<input type="checkbox"/>	2	GE2	None	Disabled
<input type="checkbox"/>	35	LAG7	None	Disabled
<input type="checkbox"/>	36	LAG8	None	Disabled

Figure 89 - Multicast > MVR > Port Setting

Item	Description
Entry	Entry of number.
Port	Port Name.
Role	Port Role for MVR, the type is None/Receiver/Source.
Immediate Leave	Status of immediate leave.

Click "Edit" button to view Edit Port Setting menu.

Edit Port Setting

Port	GE17
Role	<input checked="" type="radio"/> None <input type="radio"/> Receiver <input type="radio"/> Source
Immediate Leave	<input type="checkbox"/> Enable

Figure 90 - Multicast > MVR > Port Setting > Edit Port Setting

Item	Description
Port	Display the selected port list.
Role	MVR port role <ul style="list-style-type: none"> • None: port role is none. • Receiver: port role is receiver. • Source: port role is source.
Immediate Leave	MVR Port immediate leave <ul style="list-style-type: none"> • Enable: if checked is enable immediate leave, else disable immediate leave.

4.9.3.3. Group Address

This page allow user to browse all multicast MVR groups that dynamic learned or statically added.

To view the Group Address Table menu, navigate to Multicast > MVR > Group Address.

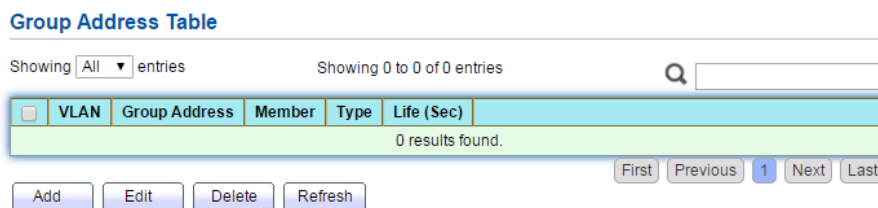


Figure 91 - Multicast > MVR > Group Address

Item	Description
VLAN	The VLAN ID of MVR group.

Group Address	The MVR group IP address.
Member	The member ports of MVR group.
Type	The type of MVR group. Static or Dynamic.
Life(Sec)	The life time of this dynamic MVR group.

Click "Add" button to view Add Group Address Table menu.

Add Group Address

VLAN	1	
Group Address	<input type="text"/>	(0.0.0.0 - 0.0.0.0)
Member	Available Port	Selected Port
	<input type="text"/>	<input type="text"/>

Figure 92 - Multicast > MVR > Group Address > Add Group Address

Item	Description
VLAN	The VLAN ID of MVR group.
Group Address	The MVR group IP address.
Member	The member ports of MVR group. <ul style="list-style-type: none"> Available Port: Optional port member, it is only receiver port when MVR mode is compatible, it include source port when mode is dynamic. Selected Port: Selected port member

4.10. Security

Use the Security pages to configure settings for the switch security features.

4.10.1. RADIUS

This page allow user to add, edit or delete RADIUS server settings and modify default parameter of RADIUS server.

To view the RADIUS menu, navigate to Security > RADIUS.

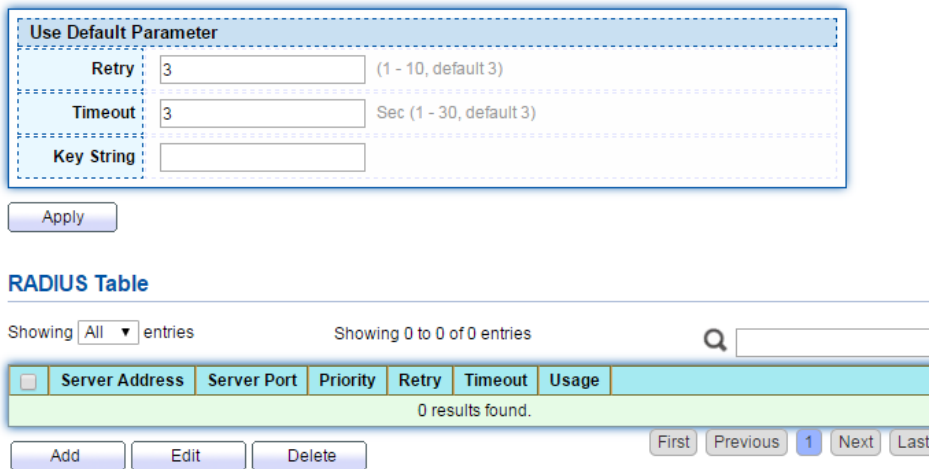


Figure 93 - Security > RADIUS

Item	Description
Retry	Set default retry number.
Timeout	Set default timeout value.
Key String	Set default RADIUS key string
RADIUS Table	
Server Address	RADIUS server address.
Server Port	RADIUS server port.

Priority	RADIUS server priority (smaller value has higher priority). RADIUS session will try to establish with the server setting which has highest priority. If failed, it will try to connect to the server with next higher priority.
Retry	RADIUS server retry value. If it is fail to connect to server, it will keep trying until timeout with retry times.
Timeout	RADIUS server timeout value. If it is fail to connect to server, it will keep trying until timeout.
Usage	RADIUS server usage type <ul style="list-style-type: none"> • Login: For login authentication. • 802.1x: For 802.1x authentication. • All: For all types.

Click "Add" button to view Add RADIUS Server menu.

Add RADIUS Server

Address Type	<input checked="" type="radio"/> Hostname <input type="radio"/> IPv4 <input type="radio"/> IPv6
Server Address	<input type="text"/>
Server Port	<input type="text" value="1812"/> (0 - 65535, default 1812)
Priority	<input type="text"/> (0 - 65535)
Key String	<input checked="" type="checkbox"/> Use Default <input type="text"/>
Retry	<input checked="" type="checkbox"/> Use Default <input type="text" value="3"/> (1 - 10, default 3)
Timeout	<input checked="" type="checkbox"/> Use Default <input type="text" value="3"/> Sec (1 - 30, default 3)
Usage	<input type="radio"/> Login <input type="radio"/> 802.1X <input checked="" type="radio"/> All

Figure 94 - Security > RADIUS > Add RADIUS Server

Item	Description
Address Type	<p>In add dialog, user need to specify server Address Type</p> <ul style="list-style-type: none">• Hostname: Use domain name as server address.• IPv4: Use IPv4 as server address.• IPv6: Use IPv6 as server address.
Server Address	<p>In add dialog, user need to input server address based on address type. In edit dialog, it shows current edit server address.</p>
Server Port	<p>Set RADIUS server port.</p>
Priority	<p>Set RADIUS server priority (smaller value has higher priority). RADIUS session will try to establish with the server setting which has highest priority. If failed, it will try to connect to the server with next higher priority.</p>
Retry	<p>Set RADIUS server retry value. If it is fail to connect to server, it will keep trying until timeout with retry times.</p>
Timeout	<p>Set RADIUS server timeout value. If it is fail to connect to server, it will keep trying until timeout.</p>
Usage	<p>Set RADIUS server usage type</p> <ul style="list-style-type: none">• Login: For login authentication.• 802.1x: For 802.1x authentication.• All: For all types.

4.10.2. Management Access

Use the Management Access pages to configure settings of management access.

4.10.2.1. Management VLAN

To view the Management menu ,navigate to Security>Management Access>Management Vlan.

Management VLAN

1 - default

Note: Change Management VLAN may cause connection interrupted

Apply

Item	Description
Management VLAN	Select management VLAN in option list. Management connection, such as http, https snmp etc.,has the same VLAN of management VLAN are allow connecting to device. Others will be dropped.

4.10.2.2. Management Service

To view the Management Service menu, navigate to Security > Management Access > Management Service.

Management Service	
Telnet	<input type="checkbox"/> Enable
SSH	<input type="checkbox"/> Enable
HTTP	<input checked="" type="checkbox"/> Enable
HTTPS	<input type="checkbox"/> Enable
SNMP	<input checked="" type="checkbox"/> Enable
Session Timeout	
Console	10 <small>Min (0 - 65535, default 10)</small>
Telnet	10 <small>Min (0 - 65535, default 10)</small>
SSH	10 <small>Min (0 - 65535, default 10)</small>
HTTP	10 <small>Min (0 - 65535, default 10)</small>
HTTPS	10 <small>Min (0 - 65535, default 10)</small>
Password Retry Count	
Console	3 <small>(0 - 120, default 3)</small>
Telnet	3 <small>(0 - 120, default 3)</small>
SSH	3 <small>(0 - 120, default 3)</small>
Silent Time	
Console	0 <small>Sec (0 - 65535, default 0)</small>
Telnet	0 <small>Sec (0 - 65535, default 0)</small>
SSH	0 <small>Sec (0 - 65535, default 0)</small>

Apply


Figure 96 - Security > Management Access > Management Service

Item	Description
Management Service	Management service admin state. <ul style="list-style-type: none"> • Telnet: Connect CLI through telnet. • SSH: Connect CLI through SSH. • HTTP: Connect WEBUI through HTTP. • HTTPS: Connect WEBUI through HTTPS. • SNMP: Manage switch trough SNMP.
Session Timeout	Set session timeout minutes for user access to user interface. 0 minutes means never timeout.

Password Retry Count	Retry count is the number which CLI password input error tolerance count. After input error password exceeds this count, the CLI will freeze after silent time.
Silent Time	After input error password exceeds password retry count, the CLI will freeze after silent time.

4.10.2.3. Management ACL

To view the Management ACL menu, navigate to Security > Management Access > Management ACL.

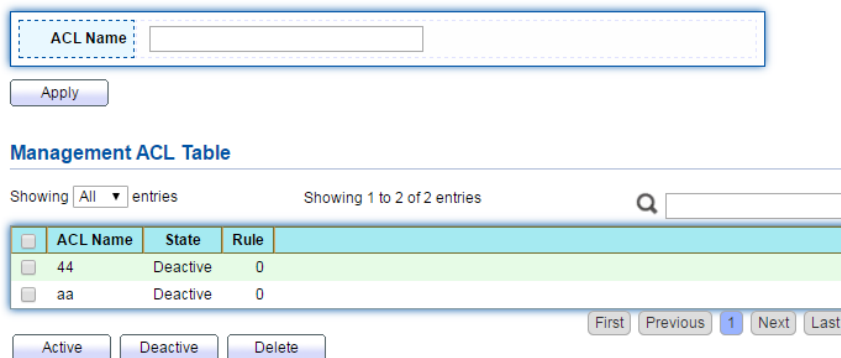

ACL Name:

Apply

Management ACL Table

Showing All entries Showing 1 to 2 of 2 entries

ACL Name	State	Rule
44	Deactive	0
aa	Deactive	0

Active Deactive Delete First Previous 1 Next Last

Figure 97 - Security > Management Access > Management ACL

Item	Description
ACL Name	Input MAC ACL name.
Management ACL	
ACL Name	Display Management ACL name.
State	Display Management ACL whether active.
Rule	Display the number Management ACE rule of ACL.

4.10.2.4. Management ACE

To view the Management ACE menu, navigate to Security > Management Access > Management ACE.

Management ACE Table

ACL Name

Showing entries Showing 1 to 1 of 1 entries

<input type="checkbox"/>	Priority	Action	Service	Port	Address / Mask
<input type="checkbox"/>	1	Deny	Snmp	GE1,GE3	N/A

Figure 98 - Security > Management Access > Management ACE

Item	Description
ACL Name	Select the ACL name to which an ACE is being added.
Priority	Display the priority of ACE.
Action	Display the action of ACE.
Service	Display the service ACE
Port	Display the port list of ACE
Address / Mask	Display the source IP address and mask of ACE.

Click "Add" button view the Add Management ACE menu.

Add Management ACE

ACL Name	44	
Priority	1 (1 - 65535)	
Service	<input type="radio"/> All <input type="radio"/> Http <input type="radio"/> Https <input checked="" type="radio"/> Snmp <input type="radio"/> SSH <input type="radio"/> Telnet	
Action	<input type="radio"/> Permit <input checked="" type="radio"/> Deny	
Port	Available Port GE1 GE2 GE3 GE4 GE5 GE6 GE7 GE8	Selected Port [Empty]
IP Version	<input checked="" type="radio"/> All <input type="radio"/> IPv4 <input type="radio"/> IPv6	
IPv4	[Empty] / 255.255.255.255	
IPv6	[Empty] / 128 (1 - 128)	

Figure 99 - Security > Management Access > Management ACE > Add

Item	Description
ACL Name	Display the ACL name to which an ACE is being added.
Priority	Specify the priority of the ACE. ACEs with higher sequence are processed first (1 is the highest priority). Only available on Add Dialog.
Service	Select the type service of rule. <ul style="list-style-type: none"> All: All services HTTP: Only HTTP service.

	<ul style="list-style-type: none"> • HTTPs: Only HTTPs service. • SNMP: Only SNMP service. • SSH: Only SSH service. • Telnet: Only Telnet service.
Action	Select the action after ACE match packet. <ul style="list-style-type: none"> • Permit: Forward packets that meet the ACE criteria. • Deny: Drop packets that meet the ACE criteria.
Port	Select ports which will be matched.
IP Version	Select the type of source IP address. <ul style="list-style-type: none"> • All: All IP addresses can access. • IPv4: Specify IPv4 address ca access • IPv6: Specify IPv6 address ca access
IPv4	Enter the source IPv4 address value and mask to which will be matched.
IPv6	Enter the source IPv6 address value and mask to which will be matched.

4.10.3. Authentication Manager

4.10.3.1. Property

This page allow user to edit authentication global settings and some port modes' configurations.

To view the Property menu, navigate to Security > Authentication Manager > Property.

Authentication Type 802.1x

Enable

Guest VLAN

MAC-Based User ID Format

Port Mode Table

<input type="checkbox"/>	Entry	Port	Authentication Type	Host Mode	Method	Guest VLAN	VLAN Assign Mode
			802.1x				
<input type="checkbox"/>	1	GE1	Disabled	Multiple Authentication	RADIUS	Disabled	Static
<input type="checkbox"/>	2	GE2	Disabled	Multiple Authentication	RADIUS	Disabled	Static
<input type="checkbox"/>	3	GE3	Disabled	Multiple Authentication	RADIUS	Disabled	Static
<input type="checkbox"/>	27	GE27	Disabled	Multiple Authentication	RADIUS	Disabled	Static
<input type="checkbox"/>	28	GE28	Disabled	Multiple Authentication	RADIUS	Disabled	Static

Figure 100 - Security > Authentication Manager > Property

Item	Description
Authentication Type	Set checkbox to enable/disable following authentication types <ul style="list-style-type: none"> 802.1x: Use IEEE 802.1x to do authentication MAC-Based: Use MAC address to do authentication WEB-Based: Prompt authentication web page for user to do authentication
Guest VLAN	Set checkbox to enable/disable guest VLAN, if guest VLAN is enabled, you need to select one available VLAN ID to be guest VID.
MAC-Based User ID Format	Select mac-based authentication RADIUS username/password ID format. <ul style="list-style-type: none"> XXXXXXXXXXXX Xxxxxxxxxxxxxx XX:XX:XX:XX:XX:XX xx:xx:xx:xx:xx:xx

	<ul style="list-style-type: none"> • XX-XX-XX-XX-XX-XX • XX-XX-XX-XX-XX-XX • XX.XX.XX.XX.XX.XX • XX.XX.XX.XX.XX.XX • XXXX:XXXX:XXXX • XXXX:XXXX:XXXX • XXXX-XXXX-XXXX • XXXX-XXXX-XXXX • XXXX.XXXX.XXXX • XXXX.XXXX.XXXX • XXXXXX:XXXXXX • XXXXXX:XXXXXX • XXXXXX-XXXXXX • XXXXXX-XXXXXX • XXXXXX.XXXXXX • XXXXXX.XXXXXX
--	--

Port Mode Table

Port	Port Name.
Authentication Type (802.1X)	802.1X authentication type state <ul style="list-style-type: none"> • Enabled: 802.1X is enabled. • Disabled: 802.1X is disabled.
Authentication Type (MAC-Based)	MAC-Based authentication type state <ul style="list-style-type: none"> • Enabled: MAC-Based authentication is enabled • Disabled: MAC-Based authentication is disabled

Authentication Type (WEB-Based)	WEB-Based authentication type state <ul style="list-style-type: none"> • Enabled: WEB-Based authentication is enabled • Disabled: WEB-Based authentication is disabled
Host Mode	Authenticating host mode <ul style="list-style-type: none"> • Multiple Authentication: In this mode, every client need to pass authenticate procedure individually. • Multiple Hosts: In this mode, only one client need to be authenticated and other clients will get the same access accessibility. Web-auth cannot be enabled in this mode. • Single Host: In this mode, only one host is allowed to be authenticated. It is the same as Multi-auth mode with max hosts number configure to be 1.
Method	Support following authentication method order combinations. These orders only available on MAC-Based authentication and WEB-Based authentication. 802.1x only support Radius method. <ul style="list-style-type: none"> • Local: Use DUT' s local database to do authentication • Radius: Use remote RADIUS server to do authentication • Local Radius • Radius Local
Guest VLAN	Port guest VLAN enable state <ul style="list-style-type: none"> • Enabled: Guest VLAN is enabled on port. • Disabled: Guest VLAN is disabled on port.
VLAN Assign Mode	Support following VLAN assign mode and only apply when source is RADIUS <ul style="list-style-type: none"> • Disable: Ignore the VLAN authorization result and keep original VLAN of host.

	<ul style="list-style-type: none"> • Reject: If get VLAN authorized information, just use it. However, if there is no VLAN authorized information, reject the host and make it unauthorized. • Static: If get VLAN authorized information, just use it. If there is no VLAN authorized information, keep original VLAN of host.
--	---

Click "Edit" button to view the Edit Port Mode menu.

Edit Port Mode

Port: GE17

Authentication Type: 802.1x

Host Mode:

- Multiple Authentication
- Multiple Hosts
- Single Host

Method:

Available Method

Local

Select Method

RADIUS

Guest VLAN: Enable

VLAN Assign Mode:

- Disable
- Reject
- Static

Figure 101 - Security > Authentication Manager > Property > Edit Port Mode

Item	Description
Port	Selected port list.
Authentication Type	Set checkbox to enable/disable authentication types.
Host Mode	Select authenticating host mode <ul style="list-style-type: none"> • Multiple Authentication: In this mode, every client need to pass authenticate procedure individually. • Multiple Hosts: In this mode, only one client need to be authenticated and other clients will get the same access

	<p>accessibility. Web-auth cannot be enabled in this mode.</p> <ul style="list-style-type: none"> • Single Host: In this mode, only one host is allowed to be authenticated. It is the same as Multi-auth mode with max hosts number configure to be 1.
Method	<p>Support following authentication method order combinations.</p> <ul style="list-style-type: none"> • These orders only available on MAC-Based authentication and WEB-Based authentication. 802.1x only support Radius method. • Local: Use DUT' s local database to do authentication. • Radius: Use remote RADIUS server to do authentication. • Local Radius. • Radius Local.
Guest VLAN	Set checkbox to enable/disable guest VLAN.
VLAN Assign Mode	<p>Support following VLAN assign mode and only apply when source is RADIUS</p> <ul style="list-style-type: none"> • Disable: Ignore the VLAN authorization result and keep original VLAN of host. • Reject: If get VLAN authorized information, just use it. However, if there is no VLAN authorized information, reject the host and make it unauthorized. • Static: If get VLAN authorized information, just use it. If there is no VLAN authorized information, keep original VLAN of host.

4.10.3.2. Port Setting

To view the Port Setting menu, navigate to Security > Authentication Manager >

Port Setting.

Port Setting Table

Entry	Port	Port Control	Reauthentication	Max Hosts	Common Timer			802.1x Parameters				Web-Based Parameters	
					Reauthentication	Inactive	Quiet	TX Period	Supplicant Timeout	Server Timeout	Max Request	Max Login	
<input type="checkbox"/>	1	GE1	Disabled	Disabled	256	3600	60	60	30	30	30	2	3
<input type="checkbox"/>	2	GE2	Disabled	Disabled	256	3600	60	60	30	30	30	2	3
<input type="checkbox"/>	27	GE27	Disabled	Disabled	256	3600	60	60	30	30	30	2	3
<input type="checkbox"/>	28	GE28	Disabled	Disabled	256	3600	60	60	30	30	30	2	3

Figure 102 - Security > Authentication Manager > Port Setting

Item	Description
Port	Port
Port Control	Support following authentication port control types. <ul style="list-style-type: none"> • Disable: Disable authentication function and all clients have network accessibility. • Force Authorized: Port is force authorized and all clients have network accessibility. • Force Unauthorized: Port is force unauthorized and all clients have no network accessibility. • Auto: Need passing authentication procedure to get network accessibility.
Reauthentication	Reautheticate state <ul style="list-style-type: none"> • Enabled: Host will be reauthenticated after reauthentication period. • Disabled: Host will not be reauthenticated after reauthentication period.
Max Hosts	In Multiple Authentication mode, total host number cannot not exceed max hosts number.

Common Timer (Reauthentication)	After re-authenticate period, host will return to initial state and need to pass authentication procedure again.
Common Timer (Inactive)	If no packet from the authenticated host, the inactive timer will increase. After inactive timeout, the host will be unauthorized and corresponding session will be deleted. In multi-host mode, the packet is counting on the authorized host only.
Common Timer (Quiet)	When port is in Locked state after authenticating fail several times, the host will be locked in quiet period. After this quiet period, the host is allowed to authenticate again.
802.1X Params (TX Period)	Number of seconds that the device waits for a response to an Extensible Authentication Protocol (EAP) request/identity frame from the supplicant (client) before resending the request.
802.1X Params (Supplicant Timeout)	The maximum number of EAP requests that can be sent. If a response is not received after the defined period (supplicant timeout), the authentication process is restarted.
802.1X Params (Server Timeout)	Number of seconds that lapses before EAP requests are resent to the supplicant.
802.1X Params (Max Request)	Number of seconds that lapses before the device resends a request to the authentication server.
Web-Based Param (Max Login)	Allow user login fail number. After login fail number exceed, the host will enter Lock state and is not able to authenticate until quiet period exceed.

Click "Edit" button to view Edit Port Setting menu.

Edit Port Setting

Port	GE17	
Port Control	<input checked="" type="radio"/> Disabled <input type="radio"/> Force Authorized <input type="radio"/> Force Unauthorized <input type="radio"/> Auto	
Reauthentication	<input type="checkbox"/> Enable	
Max Hosts	<input type="text" value="256"/>	(1 - 256, default 256)
Common Timer		
Reauthentication	<input type="text" value="3600"/>	Sec (300 - 4294967294, default 3600)
Inactive	<input type="text" value="60"/>	Sec (60 - 65535, default 60)
Quiet	<input type="text" value="60"/>	Sec (0 - 65535, default 60)
802.1x Parameters		
TX Period	<input type="text" value="30"/>	Sec (1 - 65535, default 30)
Supplicant Timeout	<input type="text" value="30"/>	Sec (1 - 65535, default 30)
Server Timeout	<input type="text" value="30"/>	Sec (1 - 65535, default 30)
Max Request	<input type="text" value="2"/>	(1 - 10, default 2)
Web-Based Parameters		
Max Login	<input type="checkbox"/> Infinite	
	<input type="text" value="3"/>	(3 - 10, default 3)

Figure 103 - Security > Authentication Manager > Port Setting > Edit Port Setting

Item	Description
Port	Port Name.
Port Control	Support following authentication port control types. <ul style="list-style-type: none"> • Disable: Disable authentication function and all clients have network accessibility. Force Authorized: Port is force authorized and all clients have network accessibility. • Force Unauthorized: Port is force unauthorized and all clients have no network accessibility. • Auto: Need passing authentication procedure to get network accessibility.
Reauthentication	Set checkbox to enable/disable reuauthentication.


Max Hosts	In Multiple Authentication mode, total host number cannot not exceed max hosts number.
Common Timer	
Reauthentication	After re-authenticate period, host will return to initial state and need to pass authentication procedure again.
Inactive	If no packet from the authenticated host, the inactive timer will increase. After inactive timeout, the host will be unauthorized and corresponding session will be deleted. In multi-host mode, the packet is counting on the authorized host only and not all packets on the port.
Quiet	When port is in Locked state after authenticating fail several times, the host will be locked in quiet period. After this quiet period, the host is allowed to authenticate again.
802.1X Params	
TX Period	Number of seconds that the device waits for a response to an Extensible Authentication Protocol (EAP) request/identity frame from the supplicant (client) before resending the request.
Supplicant Timeout	The maximum number of EAP requests that can be sent. If a response is not received after the defined period (supplicant timeout), the authentication process is restarted.
Server Timeout	Number of seconds that lapses before EAP requests are resent to the supplicant.
Max Request	Number of seconds that lapses before the device resends a request to the authentication server.

Web-Based Param	
Max Login	Set checkbox to set max login number to be infinite or specify max login number.

4.10.3.3. Sessions

This page show all detail information of authentication sessions and allow user to select specific session to delete by clicking “Clear ” button.

To view the Sessions menu, navigate to Security > Authentication Manager > Sessions.

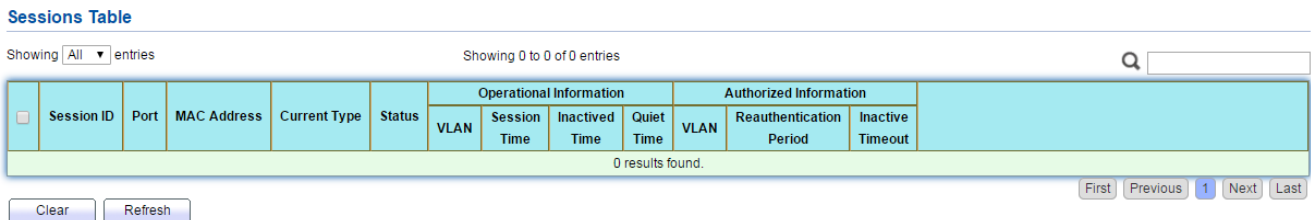

Sessions Table

Showing All entries Showing 0 to 0 of 0 entries

	Session ID	Port	MAC Address	Current Type	Status	Operational Information				Authorized Information		
						VLAN	Session Time	Inactivated Time	Quiet Time	VLAN	Reauthentication Period	Inactive Timeout
0 results found.												

Figure 104 - Security > Authentication Manager > Sessions

Item	Description
Session ID	Session ID is unique of each session.
Port	Port name which the host located.
MAC Address	Host MAC address.
Current Type	Show current authenticating type <ul style="list-style-type: none"> • 802.1x: Use IEEE 802.1X to do authenticating • MAC-Based: Use MAC-Based authentication to do


	authenticating. <ul style="list-style-type: none"> • WEB-Based: Use WEB-Based authentication to do authenticating.
Status	Show host authentication session status <ul style="list-style-type: none"> • IP version (IPv4, IPv6) • Disable: This session is ready to be deleted • Running: Authentication process is running • Authorized: Authentication is passed and getting network accessibility. • Unauthorized: Authentication is not passed and not getting network accessibility. • Locked: Host is locked and do not allow to do authenticating until quiet period. • Guest: Host is in the guest VLAN.
Operational(VLAN)	Shows host operational VLAN ID.
Operational (Session Time)	In “Authorized” state, it shows total time after authorized.
Operational (Inactived)	In “Authorized” state, it shows how long the host do not send any packet.
Operational (Quiet Time)	In “Locked” state, it shows total time after locked.
Authorized (VLAN)	Shows VLAN ID given from authorized procedure.
Authorized (Reauthentication Period)	Shows reauthentication period given from authorized procedure.
Authorized	Shows inactive timeout given from authorized procedure.

(Inactive Timeouts)	
---------------------	--

4.10.4. Port Security

This page allow user to configure port security settings for each interface. When port security is enabled on interface, action will be perform once learned MAC address over limitation.

To view the Port Security menu, navigate to Security > Port Security.

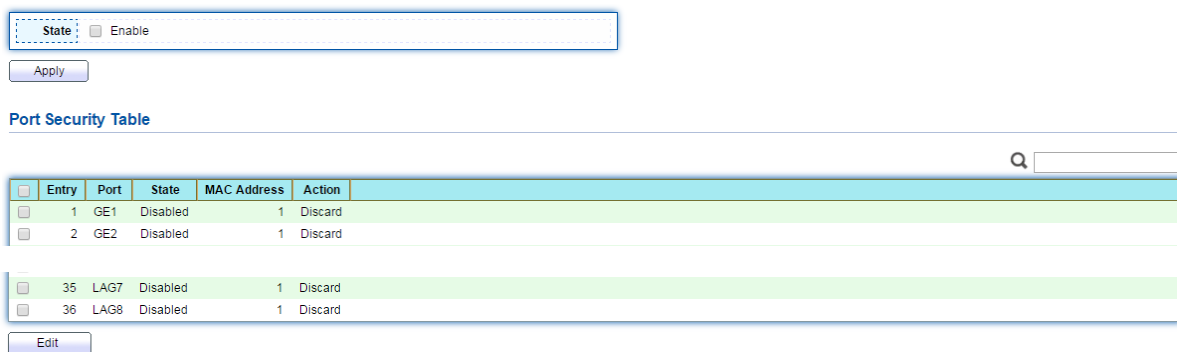

State: Enable

Apply

Port Security Table

Entry	Port	State	MAC Address	Action
1	GE1	Disabled	1	Discard
2	GE2	Disabled	1	Discard
35	LAG7	Disabled	1	Discard
36	LAG8	Disabled	1	Discard

Edit

Figure 105 - Security > Port Security

Item	Description
State	Enable/Disable the port security function.
Port	Select one or multiple ports to configure.
State	Select the status of port security <ul style="list-style-type: none"> • Disable: Disable port security function. • Enable: Enable port security function.
MAC Address	Specify the number of how many mac addresses can be

	learned.
Action	<p>Select the action if learned mac addresses</p> <ul style="list-style-type: none"> • Forward: Forward this packet whose SMAC is new to system and exceed the learning-limit number. • Discard: Discard this packet whose SMAC is new to system and exceed the learning-limit number. • Shutdown: Shutdown this port when receives a packet whose SMAC is new to system and exceed the learning limit number.

Click "Edit" button to view Edit Port Security menu.

Edit Port Security

Port: GE17

State: Enable

MAC Address: (0 - 255, default 1)

Action: Forward Discard Shutdown

Apply Close

Figure 106 - Security > Port Security > Add Port Security

Item	Description
Port	Select one or multiple ports to configure.
State	<p>Select the status of port security</p> <ul style="list-style-type: none"> • Disable: Disable port security function. • Enable: Enable port security function.
MAC Address	Specify the number of how many mac addresses can be learned.

Action	Select the action if learned mac addresses <ul style="list-style-type: none"> • Forward: Forward this packet whose SMAC is new to system and exceed the learning-limit number. • Discard: Discard this packet whose SMAC is new to system and exceed the learning-limit number. • Shutdown: Shutdown this port when receives a packet whose SMAC is new to system and exceed the learning limit number.
--------	--

4.10.5. Protected Port

This page allow user to configure protected port setting to prevent the selected ports from communication with each other. Protected port is only allowed to communicate with unprotected port. In other words, protected port is not allowed to communicate with another protected port.

To view the Protected Port menu, navigate to Security > Protected Port.

Protected Port Table

	Entry	Port	State	
<input type="checkbox"/>	1	GE1	Unprotected	
<input type="checkbox"/>	2	GE2	Unprotected	
<input type="checkbox"/>	27	GE27	Unprotected	
<input type="checkbox"/>	28	GE28	Unprotected	

Figure 107 - Security > Protected Port

Item	Description
Port	Port Name.
State	Port protected admin state.

	<ul style="list-style-type: none"> • Protected: Port is protected. • Unprotected: Port is unprotected
--	---

Click "Edit" button to view Edit Protected Port menu.

Edit Protected Port

Port	GE17
State	<input type="checkbox"/> Protected

Figure 108 - Security > Protected Port > Edit Protected Port

Item	Description
Port	Selected port list.
State	Port protected admin state. <ul style="list-style-type: none"> • Protected: Enable protecting function. • Unprotected: Disable protecting function.

4.10.6. Storm Control

To view the Storm Control menu, navigate to Security > Storm Control.

Mode

Packet / Sec

Kbits / Sec

IFG

Exclude

Include

Port Setting Table

	Entry	Port	State	Broadcast		Unknown Multicast		Unknown Unicast		Action
				State	Rate (Kbps)	State	Rate (Kbps)	State	Rate (Kbps)	
<input type="checkbox"/>	1	GE1	Disabled	Disabled	10000	Disabled	10000	Disabled	10000	Drop
<input type="checkbox"/>	2	GE2	Disabled	Disabled	10000	Disabled	10000	Disabled	10000	Drop
<input type="checkbox"/>	27	GE27	Disabled	Disabled	10000	Disabled	10000	Disabled	10000	Drop
<input type="checkbox"/>	28	GE28	Disabled	Disabled	10000	Disabled	10000	Disabled	10000	Drop

Figure 109 - Security > Storm Control

Item	Description
Mode(Unit)	Select the unit of storm control <ul style="list-style-type: none"> Packet / Sec: storm control rate calculates by packet-based Kbits / Sec: storm control rate calculates by octet-based.
IFG	Select the rate calculates w/o preamble & IFG (20 bytes) <ul style="list-style-type: none"> Excluded: exclude preamble & IFG (20 bytes) when count ingress storm control rate. Included: include preamble & IFG (20 bytes) when count ingress storm control rate.

Click "Edit" button to view Edit Port Setting menu.

Edit Port Setting

Port	GE17
State	<input type="checkbox"/> Enable
	<input type="checkbox"/> Enable
Broadcast	<input type="checkbox"/> Enable
	10000 Kbps (16 - 1000000, default 10000)
Unknown Multicast	<input type="checkbox"/> Enable
	10000 Kbps (16 - 1000000, default 10000)
Unknown Unicast	<input type="checkbox"/> Enable
	10000 Kbps (16 - 1000000, default 10000)
Action	<input checked="" type="radio"/> Drop <input type="radio"/> Shutdown

Apply Close

Figure 110 - Security > Storm Control > Edit Port Setting

Item	Description
Port	Select the setting ports.
State	Select the state of setting <ul style="list-style-type: none"> • Enable: Enable the storm control function.
Broadcast	Enable: Enable the storm control function of Broadcast packet. Value of storm control rate, Unit: pps (packet per-second, range 1- 262143) or Kbps (Kbits per-second, range 16 - 1000000) depends on global mode setting.
Unknown Multicast	Enable: Enable the storm control function of Unknown multicast packet. Value of storm control rate, Unit: pps (packet per-second, range 1- 262143) or Kbps (Kbits per-second, range 16 - 1000000) depends on global mode setting.
Action	Select the state of setting <ul style="list-style-type: none"> • Drop: Packets exceed storm control rate will be dropped. • Shutdown: Port will be shutdown when packets exceed storm control rate.

4.10.7. DoS

A Denial of Service (DoS) attack is a hacker attempt to make a device unavailable to its users. DoS attacks saturate the device with external communication requests, so that it cannot respond to legitimate traffic. These attacks usually lead to a device CPU overload.

The DoS protection feature is a set of predefined rules that protect the network from malicious attacks. The DoS Security Suite Settings enables activating the security suite.

4.10.7.1. Property

To view the Property menu, navigate to Security > DoS > Property.

POD	<input checked="" type="checkbox"/> Enable
Land	<input checked="" type="checkbox"/> Enable
UDP Blat	<input checked="" type="checkbox"/> Enable
TCP Blat	<input checked="" type="checkbox"/> Enable
DMAC = SMAC	<input checked="" type="checkbox"/> Enable
Null Scan Attack	<input checked="" type="checkbox"/> Enable
X-Mas Scan Attack	<input checked="" type="checkbox"/> Enable
TCP SYN-FIN Attack	<input checked="" type="checkbox"/> Enable
TCP SYN-RST Attack	<input checked="" type="checkbox"/> Enable
ICMP Fragment	<input checked="" type="checkbox"/> Enable
TCP-SYN	<input checked="" type="checkbox"/> Enable Note: Source Port < 1024
TCP Fragment	<input checked="" type="checkbox"/> Enable Note: Offset = 1
Ping Max Size	<input checked="" type="checkbox"/> Enable IPv4 512 Byte (0 - 65535, default 512)
TCP Min Hdr size	<input checked="" type="checkbox"/> Enable 20 Byte (0 - 31, default 20)
IPv6 Min Fragment	<input checked="" type="checkbox"/> Enable 1240 Byte (0 - 65535, default 1240)
Smurf Attack	<input checked="" type="checkbox"/> Enable 0 Netmask Length (0 - 32, default 0)

Apply

Figure 111 - Security > DoS > Property

Item	Description
POD	Avoids ping of death attack.
Land	Drops the packets if the source IP address is equal to the destination IP address.
UDP Blat	Drops the packets if the UDP source port equals to the UDP destination port.
TCP Blat	Drops the packages if the TCP source port is equal to the TCP destination port.
DMAC = SMAC	Drops the packets if the destination MAC address is equal to the source MAC address.
Null Scan Attach	Drops the packets with NULL scan.
X-Mas Scan	Drops the packets if the sequence number is zero, and the

Attack	FIN, URG and PSH bits are set.
TCP SYN-FIN Attack	Drops the packets with SYN and FIN bits set.
TCP SYN-RST Attack	Drops the packets with SYN and RST bits set
ICMP Fragment	Drops the fragmented ICMP packets.
TCP SYN (SPORT<1024)	Drops SYN packets with sport less than 1024.
TCP Fragment (Offset = 1)	Drops the TCP fragment packets with offset equals to one.
Ping Max Size	Specify the maximum size of the ICMPv4/ICMPv6 ping packets. The valid range is from 0 to 65535 bytes, and the default value is 512 bytes.
IPv6 Min Fragment	Checks the minimum size of IPv6 fragments, and drops the packets smaller than the minimum size. The valid range is from 0 to 65535 bytes, and default value is 1240 bytes.
Smurf Attack	Avoids smurf attack. The length range of the netmask is from 0 to 323 bytes, and default length is 0 bytes.

4.10.7.2. Port Setting

To view the Port Setting menu, navigate to Security > DoS > Port Setting.

Port Setting Table

<input type="checkbox"/>	Entry	Port	State
<input type="checkbox"/>	1	GE1	Disabled
<input type="checkbox"/>	2	GE2	Disabled
<input type="checkbox"/>	3	GE3	Disabled

Edit Port Setting

Port	GE17
State	<input type="checkbox"/> Enable

Figure 112 - Security > DoS > Port Setting

Item	Description
Port	Interface or port number.
State	Enable/Disable the DoS protection on the interface.


4.10.8. DHCP Snooping

Use the DHCP Snooping pages to configure settings of DHCP Snooping

4.10.8.1. Property

This page allow user to configure global and per interface settings of DHCP Snooping.

To view the Property menu, navigate to Security > DHCP Snooping > Property.

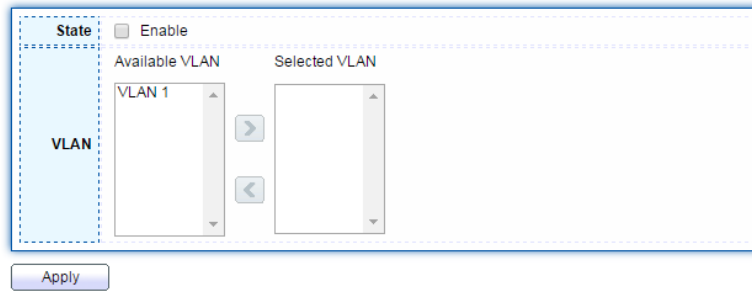
Port Setting Table

Entry	Port	Trust	Verify Chaddr	Rate Limit
1	GE1	Disabled	Disabled	Unlimited
2	GE2	Disabled	Disabled	Unlimited

Figure 113 - Security > DHCP Snooping > Property

Item	Description
State	Set checkbox to enable/disable DHCP Snooping function.
VLAN	Select VLANs in left box then move to right to enable DHCP Snooping. Or select VLANs in right box then move to left to disable DHCP Snooping.
Port Setting Table	
Port	Display port ID.
Trust	Display enable/disable trust attribute of interface.
Verify Chaddr	Display enable/disable chaddr validation attribute of interface.
Rate Limit	Display rate limitation value of interface.

Click "Edit" button to view Edit Port Setting menu.

Edit Port Setting

Port	GE17
Trust	<input type="checkbox"/> Enable
Verify Chaddr	<input type="checkbox"/> Enable
Rate Limit	0 pps (0 - 300, default 0), 0 is Unlimited

Figure 114 - Security > DHCP Snooping > Property > Edit Port Setting

Item	Description
Port	Display selected port to be edited
Trust	Set checkbox to enable/disable trust of interface. All DHCP packet will be forward directly if enable trust. Default is disabled.
Verify Chaddr	Set checkbox to enable or disable chaddr validation of interface. All DHCP packets will be checked whether client hardware mac address is same as source mac in Ethernet header if enable chaddr validation. Default is disabled.
Rate Limit	Input rate limitation of DHCP packets. The unit is pps. 0 means unlimited. Default is unlimited.

4.10.8.2. Statistics

This page allow user to browse all statistics that recorded by DHCP snooping function.

To view the Statistics menu, navigate to Security > DHCP Snooping > Statistics .

Statistics Table

<input type="checkbox"/>	Entry	Port	Forward	Chaddr Check Drop	Untrust Port Drop	Untrust Port with Option82 Drop	Invalid Drop	
<input type="checkbox"/>	1	GE1	0	0	0	0	0	
<input type="checkbox"/>	2	GE2	0	0	0	0	0	

Figure 115 - Security > DHCP Snooping > Statistics

Item	Description
Port	Display port ID.
Forwarded	Display how many packets forwarded normally.
Chaddr Check Drop	Display how many packets dropped by chaddr validation.
Untrusted Port Drop	Display how many DHCP server packets that are received by untrusted port dropped.
Untrusted Port with Option82 Drop	Display how many packets dropped by untrusted port with option82 checking.
Invalid Drop	Display how many packets dropped by invalid checking.

4.10.8.3. Option82 Property

This page allow user to set string of DHCP option82 remote ID filed. The string will attach in option82 if option inserted.

To view the Option82 Property menu, navigate to Security > DHCP Snooping > Option82 Property.

User Defined

Operational Status
 Remote ID: 00:e0:4c:00:00:00 (Switch Mac in Byte Order)

Port Setting Table

Entry	Port	State	Allow Untrust
<input type="checkbox"/>	1 GE1	Disabled	Drop
<input type="checkbox"/>	2 GE2	Disabled	Drop
<input type="checkbox"/>	35 LAG7	Disabled	Drop
<input type="checkbox"/>	36 LAG8	Disabled	Drop

Figure 116 - Security > DHCP Snooping > Option82 Property

Item	Description
User Defined	Set checkbox to enable user-defined remote-ID. By default, remote ID is switch mac in byte order.
Remote ID	Input user-defined remote ID. Only available when enable user-define remote ID.
Port Setting Table	
Port	Display port ID.
State	Display option82 enable/disable status of interface.
Allow untrusted	Display allow untrusted action of interface.

Click "Edit" button to view Edit Port Setting menu.

Edit Port Setting

Port	GE17
State	<input type="checkbox"/> Enable
Allow Untrust	<input type="radio"/> Keep
	<input checked="" type="radio"/> Drop
	<input type="radio"/> Replace

Apply Close

Figure 117 - Security > DHCP Snooping > Option82 Property
> Edit Port Setting

Item	Description
Port	Display selected port to be edited
State	Set checkbox to enable/disable option82 function of interface.
Allow untrusted	Select the action perform when untrusted port receive DHCP packet has option82 filed. Default is drop. <ul style="list-style-type: none"> • Keep: Keep original option82 content. • Replace: Replace option82 content by switch setting • Drop: Drop packets with option82

4.10.8.4. Option82 Circuit ID

This page allow user to set string of DHCP option82 circuit ID filed. The string will attach in option82 if option inserted.

To view the Option82 Circuit ID menu, navigate to Security > DHCP Snooping > Option82 Property.

Option82 Circuit ID Table

Showing All entries Showing 1 to 1 of 1 entries

<input type="checkbox"/>	Port	VLAN	Circuit ID
<input type="checkbox"/>	GE1	1	12

 1

Figure 118 - Security > DHCP Snooping > Option82 Circuit ID

Item	Description
Port	Display port ID of entry.
VLAN	Display associate VLAN of entry.
Circuit ID	Display circuit ID string of entry.

Click “Add” button or "Edit" button to view the Add/Edit Option82 Circuit ID menu.

Add Option82 Circuit ID

Port:	GE1
VLAN:	<input type="text"/> (1 - 4094) (Keep empty to set without VLAN)
Circuit ID:	<input type="text"/>

Edit Option82 Circuit ID

Port:	GE1
VLAN:	1
Circuit ID:	12

Figure 119 - Security > DHCP Snooping > Option82 Circuit ID
> Add/Edit Option82 Circuit ID

Item	Description
Port	Select port from list to associate to CID entry. Only available on Add dialog.
VLAN	Input VLAN ID to associate to circuit ID entry. VLAN ID is not mandatory. Only available on Add dialog.
Circuit ID	Input String as circuit ID. Packets match port and VLAN will be inserted circuit ID.

4.10.9. IP Source Guard

Use the IP Source Guard pages to configure settings of IP Source Guard.

4.10.9.1. Port Setting

Use the IP Source Guard pages to configure settings of IP Source Guard.

To view the Port Setting menu, navigate to Security > IP Source Guard > Port Setting.

Port Setting Table

<input type="checkbox"/>	Entry	Port	State	Verify Source	Current Entry	Max Entry
<input type="checkbox"/>	1	GE1	Disabled	IP	0	Unlimited
<input type="checkbox"/>	2	GE2	Disabled	IP	0	Unlimited

Figure 120 - Security > IP Source Guard > Port Setting

Item	Description
Port	Display port ID.
State	Display IP Source Guard enable/disable status of interface.
Verify Source	Display mode of IP Source Guard verification
Current Binding Entry	Display current binding entries of a interface.
Max Binding Entry	Display the number of maximum binding entry of interface.

Click "Edit" button to view the Edit Port Setting menu.

Edit Port Setting

Port	GE27
State	<input type="checkbox"/> Enable
Verify Source	<input checked="" type="radio"/> IP <input type="radio"/> IP-MAC
Max Entry	<input type="text" value="0"/> (0 - 50, default 0), 0 is Unlimited

Figure 121 - Security > IP Source Guard > Port Setting > Edit Port Setting

Item	Description
Port	Display selected port to be edited.
Status	Set checkbox to enable or disable IP Source Guard function. Default is disabled.
Verify Source	Select the mode of IP Source Guard verification <ul style="list-style-type: none"> • IP: Only verify source IP address of packet.

	<ul style="list-style-type: none"> IP-MAC: Verify source IP and source MAC address of packet.
Max Entry	Input the maximum number of entries that a port can be bounded. Default is un-limited on all ports. No entry will be bound if limitation reached.

4.10.9.2. IMPV Binding

This page allow user to add static IP source guard entry and browse all IP source guard entries that learned by DHCP snooping or statically create by user.

To view the IMPV Binding menu, navigate to Security > IP Source Guard > IMPV Binding.

IP-MAC-Port-VLAN Binding Table

Showing entries Showing 1 to 1 of 1 entries

<input type="checkbox"/>	Port	VLAN	MAC Address	IP Address	Binding	Type	Lease Time
<input type="checkbox"/>	GE1	1	00:00:00:00:00:01	192.168.169.1 / 255.255.255.255	IP-MAC-Port-VLAN	Static	N/A

Figure 122 - Security > IP Source Guard > IMPV Binding

Item	Description
Port	Display port ID of entry.
VLAN	Display VLAN ID of entry.
MAC Address	Display MAC address of entry. Only available of IP-MAC binding entry.

IP Address	Display IP address of entry. Mask always to be 255.255.255.255 for IP-MAC binding. IP binding entry display user input.
Binding	Display binding type of entry.
Type	Type of existing binding entry <ul style="list-style-type: none"> • Static: Entry added by user. • Dynamic: Entry learned by DHCP snooping.
Lease Time	Lease time of DHCP Snooping learned entry. After lease time entry will be deleted. Only available of dynamic entry.

Click "Edit" button to view the Add IP-MAC-Port-VLAN menu.

Add IP-MAC-Port-VLAN Binding

Port	GE1 ▼
VLAN	<input type="text"/> (1 - 4094)
Binding	<input checked="" type="radio"/> IP-MAC-Port-VLAN <input type="radio"/> IP-Port-VLAN
MAC Address	<input type="text"/>
IP Address	<input type="text"/> / 255.255.255.255

Figure 123 - Security > IP Source Guard > IMPV Binding


Item	Description
Port	Select port from list of a binding entry.
VLAN	Specify a VLAN ID of a binding entry.
Binding	Select matching mode of binding entry

	<ul style="list-style-type: none"> • IP-MAC-Port-VLAN: packet must match IP address, MAC address, Port and VLAN ID. • IP-Port-VLAN: packet must match IP address or subnet, Port and VLAN ID.
MAC Address	Input MAC address. Only available on IP-MAC-Port-VLAN mode.
IP Address	Input IP address and mask. Mask only available on IP-MAC-Port mode.

4.10.9.3. Save Database

This page allow user to configure DHCP snooping database which can backup and restore dynamic DHCP snooping entries.

To view the Save Database menu, navigate to Security > IP Source Guard > Save Database.

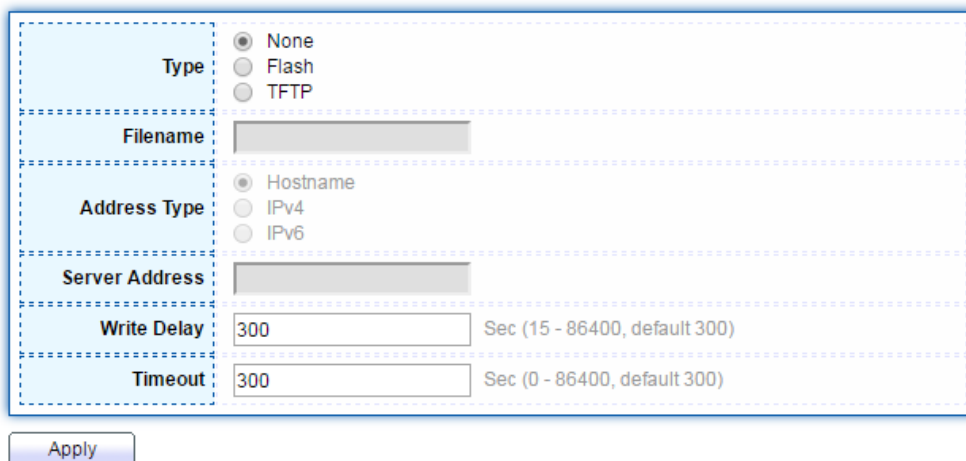

The screenshot shows a configuration form for the 'Save Database' feature. The form is enclosed in a dashed blue border and contains the following fields:

- Type:** Radio buttons for None (selected), Flash, and TFTP.
- Filename:** A text input field.
- Address Type:** Radio buttons for Hostname (selected), IPv4, and IPv6.
- Server Address:** A text input field.
- Write Delay:** A text input field with the value '300' and a range of 'Sec (15 - 86400, default 300)'.
- Timeout:** A text input field with the value '300' and a range of 'Sec (0 - 86400, default 300)'.

Below the form is an 'Apply' button.

Figure 124 - Security > IP Source Guard > Save Database

Item	Description
Type	Select the type of database agent. <ul style="list-style-type: none">• None: Disable database agent service.• Flash: Save DHCP dynamic binding entries to flash.• TFTP: Save DHCP dynamic binding entries to remote TFTP server.
Filename	Input filename for backup file. Only available when selecting type “flash” and “TFTP” .
Address Type	Select the type of TFTP server. <ul style="list-style-type: none">• Hostname: TFTP server address is hostname.• IPv4: TFTP server address is IPv4 address
Server Address	Input remote TFTP server hostname or IP address. Only available when selecting type “TFTP”
Write Delay	Input delay timer for doing backup after change happened. Default is 300 seconds.
Timeout	Input aborts timeout for doing backup failure. Default is 300 seconds.

4.11. ACL

Use the ACL pages to configure settings for the switch ACL features..

4.11.1. MAC ACL

This page allow user to add or delete ACL rule. A rule cannot be deleted if under binding.

To view the MAC ACL menu, navigate to ACL > MAC ACL.

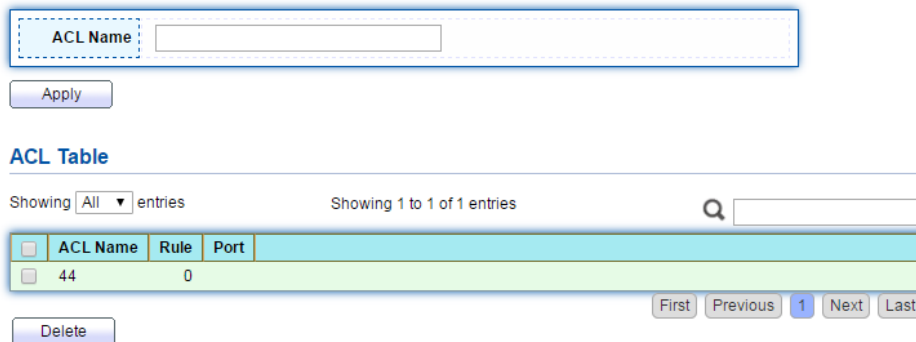


Figure 125 - ACL > MAC ACL

Item	Description
ACL Name	Input MAC ACL name.
ACL Name	Display MAC ACL name.
Rule	Display the number ACE rule of ACL.
Port	Display the port list that bind this ACL.

4.11.2. MAC ACE

This page allow user to add, edit or delete ACE rule. An ACE rule cannot be edited or deleted if ACL under binding. New ACE cannot be added if ACL under binding.

To view the MAC ACE menu, navigate to ACL > MAC ACE.

ACE Table

ACL Name

Showing entries Showing 1 to 1 of 1 entries

	Sequence	Action	Source MAC		Destination MAC		Ethertype	VLAN	802.1p	
			Address	Mask	Address	Mask			Value	Mask
<input type="checkbox"/>	1	Permit	Any	Any	Any	Any	Any	Any	Any	

Figure 126 - ACL > MAC ACE

Item	Description
ACL Name	Select the ACL name to which an ACE is being added.
Sequence	Display the sequence of ACE.
Action	Display the action of ACE.
Source MAC	Display the source MAC address and mask of ACE.
Destination MAC	Display the destination MAC address and mask of ACE.
Ethertype	Display the Ethernet frame type of ACE.
VLAN ID	Display the VLAN ID of ACE.
802.1p Value	Display the 802.1p value of ACE.
802.1p Mask	Display the 802.1p mask of ACE.

Click "Add" button to view the Add ACE menu.

Add ACE

ACL Name	44
Sequence	<input type="text" value=""/> (1 - 2147483647)
Action	<input checked="" type="radio"/> Permit <input type="radio"/> Deny <input type="radio"/> Shutdown
Source MAC	<input checked="" type="checkbox"/> Any <input type="text" value=""/> / <input type="text" value=""/> (Address / Mask)
Destination MAC	<input checked="" type="checkbox"/> Any <input type="text" value=""/> / <input type="text" value=""/> (Address / Mask)
Ethertype	<input checked="" type="checkbox"/> Any 0x <input type="text" value=""/> (0x600 ~ 0xFFFF)
VLAN	<input checked="" type="checkbox"/> Any <input type="text" value=""/> (1 - 4094)
802.1p	<input checked="" type="checkbox"/> Any <input type="text" value=""/> / <input type="text" value=""/> (Value / Mask) (0 - 7)

Apply Close

Figure 127 - ACL > MAC ACE > Add ACE

Item	Description
ACL Name	Display the ACL name to which an ACE is being added.
Sequence	Specify the sequence of the ACE. ACEs with higher sequence are processed first (1 is the highest priority). Only available on Add Dialog.
Action	Select the action after ACE match packet. <ul style="list-style-type: none"> Permit: Forward packets that meet the ACE criteria. Deny: Drop packets that meet the ACE criteria. Shutdown: Drop packets that meet the ACE criteria, and disable the port from where the packets were received. Such ports can be reactivated from the Port Settings page.
Source MAC	Select the type for source MAC address.

	<ul style="list-style-type: none"> Any: All source addresses are acceptable. User Defined: Only a source address or a range of source addresses which users define are acceptable. Enter the source MAC address and mask to which will be matched.
Destination MAC	<p>Select the type for Destination MAC address.</p> <ul style="list-style-type: none"> Any: All destination addresses are acceptable. User Defined: Only a destination address or a range of destination addresses which users define are acceptable. Enter the destination MAC address and mask to which will be matched.
Ethertype	<p>Select the type for Ethernet frame type.</p> <ul style="list-style-type: none"> Any: All Ethernet frame type is acceptable. User Defined: Only an Ethernet frame type which users define is acceptable. Enter the Ethernet frame type value to which will be matched.
VLAN ID	<p>Select the type for VLAN ID.</p> <ul style="list-style-type: none"> Any: All VLAN ID is acceptable. User Defined: Only a VLAN ID which users define is acceptable. Enter the VLAN ID to which will be matched.
802.1p	<p>Select the type for 802.1p value.</p> <ul style="list-style-type: none"> Any: All 802.1p value is acceptable. User Defined: Only an 802.1p value or a range of 802.1p value which users define is acceptable. Enter the 802.1p value and mask to which will be matched.

4.11.3. IPv4 ACL

This page allow user to add or delete IPv4 ACL rule. A rule cannot be deleted if under binding.

To view the IPv4 ACL menu, navigate to ACL > IPv4 ACL.

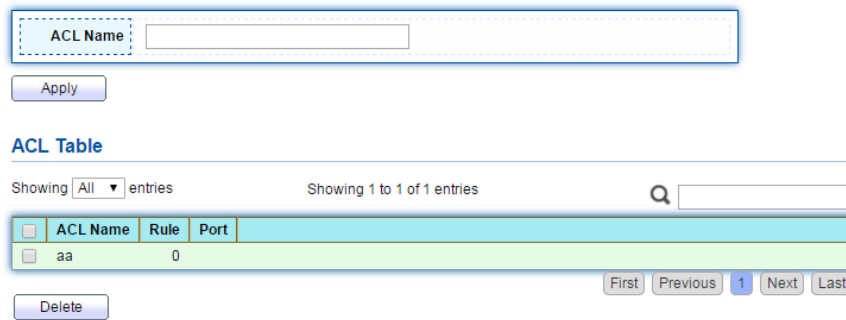


Figure 128 - ACL > IPv4 ACL

Item	Description
ACL Name	Input IPv4 ACL name.
ACL Name	Display IPv4 ACL name.
Rule	Display the number ACE rule of ACL.
Port	Display the port list that bind this ACL.

4.11.4. IPv4 ACE

This page allow user to add, edit or delete ACE rule. An ACE rule cannot be edited or deleted if ACL under binding. New ACE cannot be added if ACL under binding.

To view the ACL menu, navigate to ACL > IPv4 ACE.

ACE Table

ACL Name

Showing entries Showing 1 to 1 of 1 entries

Sequence	Action	Protocol	Source IP		Destination IP		Source Port	Destination Port	TCP Flags	Type of Service		ICMP	
			Address	Mask	Address	Mask				DSCP	IP Precedence	Type	Code
11	Permit	Any (IP)	Any	Any	Any	Any				Any		Any	

Figure 129 - ACL > IPv4 ACE

Item	Description
ACL Name	Select the ACL name to which an ACE is being added.
Sequence	Display the sequence of ACE.
Action	Display the action of ACE.
Protocol	Display the protocol value of ACE.
Source IP	Display the source IP address and mask of ACE.
Destination IP	Display the destination IP address and mask of ACE.
Source Port	Display single source port or a range of source ports of ACE. Only available when protocol is TCP or UDP.
Destination Port	Display single destination port or a range of destination ports of ACE. Only available when protocol is TCP or UDP.
TCP Flags	Display the TCP flag value if ACE. Only available when protocol is TCP.
Type of Service	Display the ToS value of ACE which could be DSCP or IP Precedence.
ICMP	Display the ICMP type and code of ACE. Only available when protocol is ICMP.

Click "Add" button to Add ACE menu.

Add ACE

ACL Name	aa
Sequence	<input type="text" value="1"/> (1 - 2147483647)
Action	<input checked="" type="radio"/> Permit <input type="radio"/> Deny <input type="radio"/> Shutdown
Protocol	<input checked="" type="radio"/> Any <input type="radio"/> Select <input type="text" value="ICMP"/> <input type="button" value="v"/> <input type="radio"/> Define <input type="text" value=""/> (0 - 255)
Source IP	<input checked="" type="radio"/> Any <input type="radio"/> <input type="text" value=""/> / <input type="text" value=""/> (Address / Mask)
Destination IP	<input checked="" type="radio"/> Any <input type="radio"/> <input type="text" value=""/> / <input type="text" value=""/> (Address / Mask)
Type of Service	<input checked="" type="radio"/> Any <input type="radio"/> DSCP <input type="text" value=""/> (0 - 63) <input type="radio"/> IP Precedence <input type="text" value=""/> (0 - 7)
Source Port	<input checked="" type="radio"/> Any <input type="radio"/> Single <input type="text" value=""/> (0 - 65535) <input type="radio"/> Range <input type="text" value=""/> - <input type="text" value=""/> (0 - 65535)
Destination Port	<input checked="" type="radio"/> Any <input type="radio"/> Single <input type="text" value=""/> (0 - 65535) <input type="radio"/> Range <input type="text" value=""/> - <input type="text" value=""/> (0 - 65535)
TCP Flags	Urg: <input type="radio"/> Set <input type="radio"/> Unset <input checked="" type="radio"/> Don't care Ack: <input type="radio"/> Set <input type="radio"/> Unset <input checked="" type="radio"/> Don't care Psh: <input type="radio"/> Set <input type="radio"/> Unset <input checked="" type="radio"/> Don't care Rst: <input type="radio"/> Set <input type="radio"/> Unset <input checked="" type="radio"/> Don't care Syn: <input type="radio"/> Set <input type="radio"/> Unset <input checked="" type="radio"/> Don't care Fin: <input type="radio"/> Set <input type="radio"/> Unset <input checked="" type="radio"/> Don't care
ICMP Type	<input checked="" type="radio"/> Any <input type="radio"/> Select <input type="text" value="Echo Reply"/> <input type="button" value="v"/> <input type="radio"/> Define <input type="text" value=""/> (0 - 255)
ICMP Code	<input checked="" type="radio"/> Any <input type="radio"/> Define <input type="text" value=""/> (0 - 255)

Figure 130 - ACL > IPv4 ACE

Item	Description
ACL Name	Display the ACL name to which an ACE is being added.
Sequence	Specify the sequence of the ACE. ACEs with higher sequence are processed first (1 is the highest sequence). Only available on Add dialog.
Action	Select the action for a match.

	<ul style="list-style-type: none"> • Permit: Forward packets that meet the ACE criteria. • Deny: Drop packets that meet the ACE criteria. • Shutdown: Drop packets that meet the ACE criteria, and disable the port from where the packets were received. Such ports can be reactivated from the Port Settings page.
Protocol	<p>Select the type of protocol for a match.</p> <ul style="list-style-type: none"> • Any (IP): All IP protocols are acceptable. • Select from list: Select one of the following protocols from the drop-down list. (ICMP/IPinIP/TCP/EGP/IGP/UDP/HMP/RDP/IPV6/IPV6:ROUT/IPV6:FRAG/RSVP/IPV6:ICMP/OSPF/PIM/L2TP) • Protocol ID to match: Enter the protocol ID.
Source IP	<p>Select the type for source IP address.</p> <ul style="list-style-type: none"> • Any: All source addresses are acceptable. • User Defined: Only a source address or a range of source addresses which users define are acceptable. Enter the source IP address value and mask to which will be matched.
Destination IP	<p>Select the type for destination IP address.</p> <ul style="list-style-type: none"> • Any: All destination addresses are acceptable. • User Defined: Only a destination address or a range of destination addresses which users define are acceptable. Enter the destination IP address value and mask to which will be matched.
Source Port	<p>Select the type of protocol for a match. Only available when protocol is TCP or UDP.</p> <ul style="list-style-type: none"> • Any: All source ports are acceptable. • Single: Enter a single TCP/UDP source port to which

	<p>packets are matched.</p> <ul style="list-style-type: none"> • Range: Select a range of TCP/UDP source ports to which the packet is matched. There are eight different port ranges that can be configured (shared between source and destination ports). TCP and UDP protocols each have eight port ranges.
Destination Port	<p>Select the type of protocol for a match. Only available when protocol is TCP or UDP.</p> <ul style="list-style-type: none"> • Any: All source ports are acceptable. • Single: Enter a single TCP/UDP source port to which packets are matched. • Range: Select a range of TCP/UDP source ports to which the packet is matched. There are eight different port ranges that can be configured (shared between source and destination ports). TCP and UDP protocols each have eight port ranges.
TCP Flags	<p>Select one or more TCP flags with which to filter packets. Filtered packets are either forwarded or dropped. Filtering packets by TCP flags increases packet control, which increases network security. Only available when protocol is TCP.</p>
Type of Service	<p>Select the type of service for a match.</p> <ul style="list-style-type: none"> • Any: All types of service are acceptable. • DSCP to match: Enter a Differentiated Services Code Point (DSCP) to match. • IP Precedence to match: Enter a IP Precedence to match.
ICMP Type	<p>Either select the message type by name or enter the message type number. Only available when protocol is ICMP.</p> <ul style="list-style-type: none"> • Any: All message types are acceptable.


	<ul style="list-style-type: none"> • Select from list: Select message type by name. • Protocol ID to match: Enter the number of message type.
ICMP Code	Select the type for ICMP code. Only available when protocol is ICMP. <ul style="list-style-type: none"> • Any: All codes are acceptable. • User Defined: Enter an ICMP code to match.

4.11.5. ACL Binding

This page allow user to bind or unbind ACL rule to or from interface. IPv4 and Ipv6 ACL cannot be bound to the same port simultaneously.

To view the ACL Binding menu, navigate to ACL > ACL Binding.

ACL Binding Table

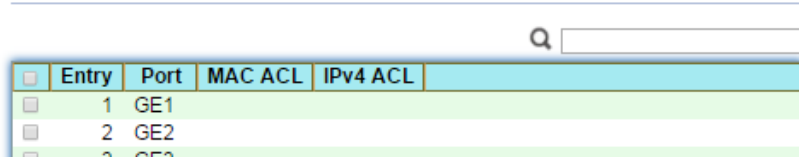

Entry	Port	MAC ACL	IPv4 ACL
1	GE1		
2	GE2		

Figure 131 - ACL > ACL Binding

Item	Description
Port	Display port entry ID.
MAC ACL	Display mac ACL name that bound of interface. Empty means no rule bound.
IPv4 ACL	Display ipv4 ACL name that bound of interface. Empty means no rule bound.

Click "Edit" button to view the Edit ACL Binding menu.

Edit ACL Binding

Port:	GE17
Note: ACL without any rules cannot be bound	
MAC ACL:	None ▼
IPv4 ACL:	None ▼

Apply Close

Figure 132 - ACL > ACL Binding

Item	Description
Port	Display port entry ID.
MAC ACL	Select mac ACL name from list to bind.
IPv4 ACL	Select IPv4 ACL name from list to bind.

4.12. QoS

Use the QoS pages to configure settings for the switch QoS interface.

4.12.1. General

Use the QoS general pages to configure settings for general purpose.

4.12.1.1. Property

To view the Property menu, navigate to QoS > General > Property.

State Enable

Trust Mode

- CoS
- CoS-DSCP
- IP Precedence

Port Setting Table

	Entry	Port	CoS	Trust	Remarking	
					CoS	IP Precedence
<input type="checkbox"/>	1	GE1	0	Enabled	Disabled	Disabled
<input type="checkbox"/>	2	GE2	0	Enabled	Disabled	Disabled

Figure 133 - QoS > General > Property

Item	Description
State	Set checkbox to enable/disable QoS.
Trust	Select QoS trust mode <ul style="list-style-type: none"> CoS: Traffic is mapped to queues based on the CoS field in the VLAN tag, or based on the per-port default CoS value (if there is no VLAN tag on the incoming packet), the actual mapping of the CoS to queue can be configured on port setting dialog. CoS-DSCP: Uses the trust CoS mode for non-IP traffic and trust DSCP mode for IP traffic. IP Precedence: Traffic is mapped to queues based on the IP precedence. The actual mapping of the IP precedence to queue can be configured on the IP Precedence mapping page.
Port Setting Table	
Port	Port name
CoS	Port default CoS priority value for the selected ports.
Trust	Port trust state

	<ul style="list-style-type: none"> • Enabled: Traffic will follow trust mode in global setting • Disabled: Traffic will always use best efforts
Remarking (CoS)	Set checkbox to enable/disable port CoS remarking. <ul style="list-style-type: none"> • Enabled: CoS remarking is enabled • Disabled: CoS remarking is disabled
Remarking (IP Precedence)	Set checkbox to enable/disable port IP Precedence remarking. <ul style="list-style-type: none"> • Enabled: DSCP remarking is enabled • Disabled: DSCP remarking is disabled

Click "Edit" button to view the Edit Port Setting menu.

Edit Port Setting

Port	GE17
CoS	<input type="text" value="0"/> (0 - 7)
Trust	<input checked="" type="checkbox"/> Enable
Remarking	
CoS	<input type="checkbox"/> Enable
IP Precedence	<input type="checkbox"/> Enable

Figure 134 - Qos > General > Property

Item	Description
Port	Selected port list.
CoS	Set default CoS/802.1p priority value for the selected ports.
Trust	Set checkbox to enable/disable port trust state.

Remarking (CoS)	Set checkbox to enable/disable port CoS remarking.
Remarking (IP Precedence)	Set checkbox to enable/disable port IP Precedence remarking.

4.12.1.2. Queue Scheduling

The switch supports eight queues for each interface. Queue number 8 is the highest priority queue.

Queue number 1 is the lowest priority queue. There are two ways of determining how traffic in queues is handled, Strict Priority (SP) and Weighted Round Robin (WRR).

- Strict Priority (SP)–Egress traffic from the highest priority queue is transmitted first. Traffic from the lower queues is processed only after the highest queue has been transmitted, which provide the highest level of priority of traffic to the highest numbered queue.
- Weighted Round Robin (WRR)–In WRR mode the number of packets sent from the queue is proportional to the weight of the queue (the higher the weight, the more frames are sent).

The queuing modes can be selected on the Queue page. When the queuing mode is by Strict Priority, the priority sets the order in which queues are serviced, starting with queue_8 (the highest priority queue) and going to the next lower queue when each queue is completed.

When the queuing mode is Weighted Round Robin, queues are serviced until their quota has been used up and then another queue is serviced. It is also possible to assign some of the lower queues to WRR, while keeping some of the higher queues in Strict Priority. In this case traffic for the SP queues is always sent before traffic from the WRR queues. After the SP queues have been emptied, traffic from the WRR queues is forwarded. (The relative portion from each WRR queue depends on its weight).

To view the Queue Scheduling menu, navigate to QoS > General > Queue Scheduling.

Queue Scheduling Table

Queue	Method			
	Strict Priority	WRR	Weight	WRR Bandwidth (%)
1	<input checked="" type="radio"/>	<input type="radio"/>	1	
2	<input checked="" type="radio"/>	<input type="radio"/>	2	
3	<input checked="" type="radio"/>	<input type="radio"/>	3	
4	<input checked="" type="radio"/>	<input type="radio"/>	4	
5	<input checked="" type="radio"/>	<input type="radio"/>	5	
6	<input checked="" type="radio"/>	<input type="radio"/>	9	
7	<input checked="" type="radio"/>	<input type="radio"/>	13	
8	<input checked="" type="radio"/>	<input type="radio"/>	15	

Apply

Figure 135 - QoS > General > Queue Scheduling

Item	Description
Queue	Queue ID to configure.
Strict Priority	Set queue to strict priority type.
WRR	Set queue to Weight round robin type.
Weight	If the queue type is WRR, set the queue weight for the queue.
WRR Bandwidth	Percentage of WRR queue bandwidth.

4.12.1.3. CoS Mapping

To view the Cos Mapping menu, navigate to QoS > General > Cos Mapping.

CoS to Queue Mapping

CoS	Queue
0	2 ▼
1	1 ▼
2	3 ▼
3	4 ▼
4	5 ▼
5	6 ▼
6	7 ▼
7	8 ▼

Apply

Queue to CoS Mapping

Queue	CoS
1	1 ▼
2	0 ▼
3	2 ▼
4	3 ▼
5	4 ▼
6	5 ▼
7	6 ▼
8	7 ▼

Apply

Figure 136 - QoS > General > Cos Mapping

Item	Description
CoS	CoS value.
Queue	Select queue id for the CoS value.
Queue	Queue ID
Cos	Select CoS value for the queue id.

4.12.1.4. IP Precedence Mapping

This page allow user to configure IP Precedence to Queue mapping and Queue to IP Precedence mapping.

To view the IP Precedence Mapping menu, navigate to QoS > General > IP

Precedence Mapping.

IP Precedence to Queue Mapping

IP Precedence	Queue
0	1 ▼
1	2 ▼
2	3 ▼
3	4 ▼
4	5 ▼
5	6 ▼
6	7 ▼
7	8 ▼

Apply

Queue to IP Precedence Mapping

Queue	IP Precedence
1	0 ▼
2	1 ▼
3	2 ▼
4	3 ▼
5	4 ▼
6	5 ▼
7	6 ▼
8	7 ▼

Apply

Figure 137 - QoS > General > IP Precedence Mapping

Item	Description
IP Precedence	IP Precedence value.
Queue	Queue value which IP Precedence is mapped.
Queue	Queue ID.
IP Precedence	IP Precedence value which queue is mapped.

4.12.2. Rate Limit

Use the Rate Limit pages to define values that determine how much traffic the switch can receive and send on specific port or queue.

4.12.2.1. Ingress/Egress Port

This page allow user to configure ingress port rate limit and egress port rate limit. The ingress rate limit is the number of bits per second that can be received from the ingress interface. Excess bandwidth above this limit is discarded.

To view the Ingress / Egress Port menu, navigate to QoS > Rate Limit > Ingress / Egress Port.

Ingress / Egress Port Table

Entry	Port	Ingress		Egress	
		State	Rate (Kbps)	State	Rate (Kbps)
<input type="checkbox"/>	1 GE1	Disabled		Disabled	
<input type="checkbox"/>	2 GE2	Disabled		Disabled	
<input type="checkbox"/>	3 GE3	Disabled		Disabled	
<input type="checkbox"/>	4 GE4	Disabled		Disabled	
<input type="checkbox"/>	5 GE5	Disabled		Disabled	
<input type="checkbox"/>	6 GE6	Disabled		Disabled	
<input type="checkbox"/>	7 GE7	Disabled		Disabled	
<input type="checkbox"/>	8 GE8	Disabled		Disabled	
<input type="checkbox"/>	9 GE9	Disabled		Disabled	
<input type="checkbox"/>	10 GE10	Disabled		Disabled	
<input type="checkbox"/>	11 GE11	Disabled		Disabled	
<input type="checkbox"/>	12 GE12	Disabled		Disabled	
<input type="checkbox"/>	13 GE13	Disabled		Disabled	
<input type="checkbox"/>	14 GE14	Disabled		Disabled	
<input type="checkbox"/>	15 GE15	Disabled		Disabled	
<input type="checkbox"/>	16 GE16	Disabled		Disabled	
<input type="checkbox"/>	17 GE17	Disabled		Disabled	
<input type="checkbox"/>	18 GE18	Disabled		Disabled	
<input type="checkbox"/>	19 GE19	Disabled		Disabled	
<input type="checkbox"/>	20 GE20	Disabled		Disabled	
<input type="checkbox"/>	21 GE21	Disabled		Disabled	
<input type="checkbox"/>	22 GE22	Disabled		Disabled	
<input type="checkbox"/>	23 GE23	Disabled		Disabled	
<input type="checkbox"/>	24 GE24	Disabled		Disabled	
<input type="checkbox"/>	25 GE25	Disabled		Disabled	
<input type="checkbox"/>	26 GE26	Disabled		Disabled	
<input type="checkbox"/>	27 GE27	Disabled		Disabled	
<input type="checkbox"/>	28 GE28	Disabled		Disabled	

Figure 138 - QoS > Rate Limit > Ingress / Egress Port

Item	Description
Port	Port name.

Ingress (State)	Port ingress rate limit state <ul style="list-style-type: none"> • Enabled: Ingress rate limit is enabled • Disabled: Ingress rate limit is disabled
Ingress (Rate)	Port ingress rate limit value if ingress rate state is enabled.
IP Precedence	IP Precedence value which queue is mapped.
Egress (State)	Port egress rate limit state <ul style="list-style-type: none"> • Enabled: Egress rate limit is enabled • Disabled: Egress rate limit is disabled
Egress (Rate)	Port egress rate limit value if egress rate state is enabled.

Click "Edit" button to view the Ingress / Egress Port menu.

Edit Ingress / Egress Port

Port	GE17
Ingress	<input type="checkbox"/> Enable <input style="width: 100%;" type="text" value="1000000"/> Kbps (16 - 1000000)
Egress	<input type="checkbox"/> Enable <input style="width: 100%;" type="text" value="1000000"/> Kbps (16 - 1000000)

Figure 139 - QoS > Rate Limit > Ingress / Egress Port

Item	Description
Port	Select port list.

Ingress	Set checkbox to enable/disable ingress rate limit. If ingress rate limit is enabled, rate limit value need to be assigned.
Egress	Set checkbox to enable/disable egress rate limit. If egress rate limit is enabled, rate limit value need to be assigned.


4.13. Diagnostics

Use the Diagnostics pages to configure settings for the switch diagnostics feature or operating diagnostic utilities.

4.13.1. Logging

4.13.1.1. Property

To view the Property menu, navigate to Diagnostics > Logging > Property.

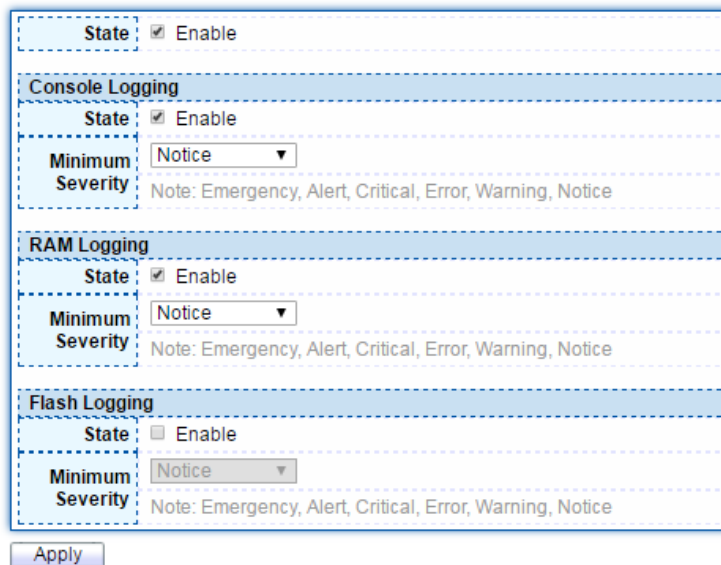

The screenshot displays the configuration interface for logging properties. It is organized into three distinct sections, each with a dashed border:

- Console Logging:** The 'State' checkbox is checked (Enable). The 'Minimum Severity' dropdown is set to 'Notice'. A note below indicates the severity levels: Emergency, Alert, Critical, Error, Warning, Notice.
- RAM Logging:** The 'State' checkbox is checked (Enable). The 'Minimum Severity' dropdown is set to 'Notice'. A note below indicates the severity levels: Emergency, Alert, Critical, Error, Warning, Notice.
- Flash Logging:** The 'State' checkbox is unchecked (Disable). The 'Minimum Severity' dropdown is set to 'Notice'. A note below indicates the severity levels: Emergency, Alert, Critical, Error, Warning, Notice.

An 'Apply' button is positioned at the bottom left of the configuration area.

Figure 140 - Diagnostics > Logging > Property

Item	Description
State	Enable/Disable the global logging services. When the logging service is enabled, logging configuration of each destination rule can be individually configured. If the logging service is disabled, no messages will be sent to these destinations.
Console Logging	
State	Enable/Disable the console logging service
Minimum Severity	The minimum severity for the console logging.
RAM Logging	
State	Enable/Disable the RAM logging service.
Minimum Severity	The minimum severity for the RAM logging.
Flash Logging	
State	Enable/Disable the flash logging service.
Minimum Severity	The minimum severity for the flash login.

4.13.1.2. Remote Server

To view the Remote Server menu, navigate to Diagnostics > Logging > Remote Server.

Remote Server Table

Entry	Server Address	Server Port	Facility	Minimum Severity	
0 results found.					

Figure 141 - Diagnostics > Logging > Remote Server

Item	Description
Server Address	The IP address of the remote logging server.
Server Ports	The port number of the remote logging server.
Facility	The facility of the logging messages. It can be one of the following values: local0,local1, local2, local3, local4, local5, local6, and local7.
Severity	The minimum severity. <ul style="list-style-type: none">• Emergence: System is not usable.• Alert: Immediate action is needed.• Critical: System is in the critical condition.• Error: System is in error condition• Warning: System warning has occurred• Notice: System is functioning properly, but a system notice has occurred.• Informational: Device information.• Debug: Provides detailed information about an event.

4.13.2. Mirroring

To view the Mirroring menu, navigate to Diagnostics > Mirroring.

Mirroring Table

	Session ID	State	Monitor Port	Ingress Port	Egress Port
<input type="radio"/>	1	Disabled	---	---	---
<input type="radio"/>	2	Disabled	---	---	---
<input type="radio"/>	3	Disabled	---	---	---
<input type="radio"/>	4	Disabled	---	---	---

** Allow the monitor port to send or receive normal packets

Figure 142 - Diagnostics > Mirroring

Item	Description
Session ID	Select mirror session ID.
State	Select mirror session state : port-base mirror or disable <ul style="list-style-type: none"> Enabled: Enable port based mirror Disabled: Disable mirror.
Monitor Port	Select mirror session monitor port, and select whether normal packet could be sent or received by monitor port.
Ingress port	Select mirror session source rx ports.
Egress port	Select mirror session source tx ports.

Click "Edit" button to view the Edit Mirroring menu.

Edit Mirroring

Session ID : 1

State : Enable

Monitor Port : GE1 ▼

Send or Receive Normal Packet

Ingress Port

Available Port		Selected Port
GE1 GE2 GE3 GE4 GE5 GE6 GE7 GE8	> <	(Empty list)

Egress Port


Available Port		Selected Port
GE1 GE2 GE3 GE4 GE5 GE6 GE7 GE8	> <	(Empty list)

Figure 143 - Diagnostics > Mirroring > Edit Mirroring

Item	Description
Session ID	Selected mirror session ID.
State	Select mirror session state : port-base mirror or disable <ul style="list-style-type: none"> Enabled: Enable port based mirror Disabled: Disable mirror.
Monitor Port	Select mirror session monitor port, and select whether normal packet could be sent or received by monitor port.
Ingress port	Select mirror session source rx ports.
Egress port	Select mirror session source tx ports.

4.13.3. Ping

To view the Ping menu, navigate to Diagnostics > Ping.

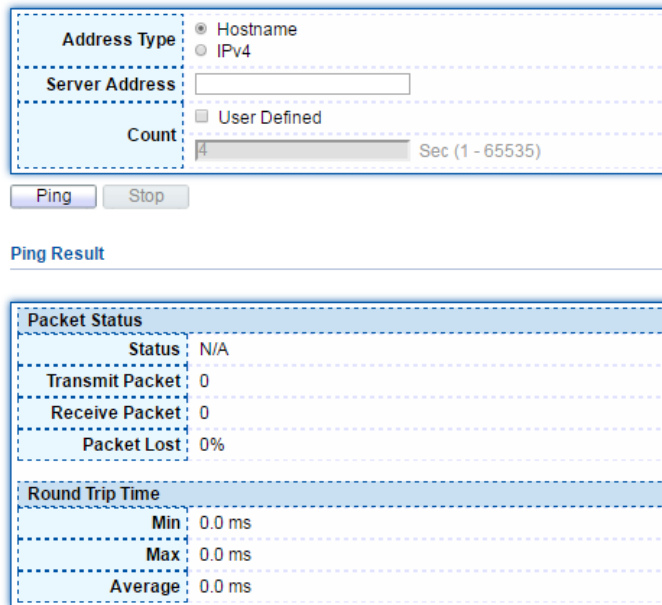

Address Type Hostname IPv4

Server Address

Count User Defined Sec (1 - 65535)

Ping Result

Packet Status	
Status	N/A
Transmit Packet	0
Receive Packet	0
Packet Lost	0%

Round Trip Time	
Min	0.0 ms
Max	0.0 ms
Average	0.0 ms

Figure 144 - Diagnostics > Ping

Item	Description
Address Type	Specify the address type to “Hostname” or “IPv4” .
Server Address	Specify the Hostname/IPv4 address for the remote logging server.
Count	Specify the numbers of each ICMP ping request.

4.13.4. Traceroute

To view the Traceroute menu, navigate to Diagnostics > Traceroute.

Address Type

Hostname
 IPv4

Server Address

Time to Live

User Defined
 (2 - 255, default 30)

Traceroute Result

Figure 145 - Diagnostics > Traceroute

Item	Description
Address Type	Specify the address type to “Hostname” or “IPv4” .
Server Address	Specify the Hostname/IPv4 address for the remote logging server.
Time to Live	Specify the max hops of hosts for traceroute.

4.14. Management

Use the Management pages to configure settings for the switch management features.

4.14.1. User Account

The default username/password is admin/admin. And default account is not able to be deleted.

Use this page to add additional users that are permitted to manage the switch or to change the passwords of existing users.

To view the User Account menu, navigate to Management > User Account.

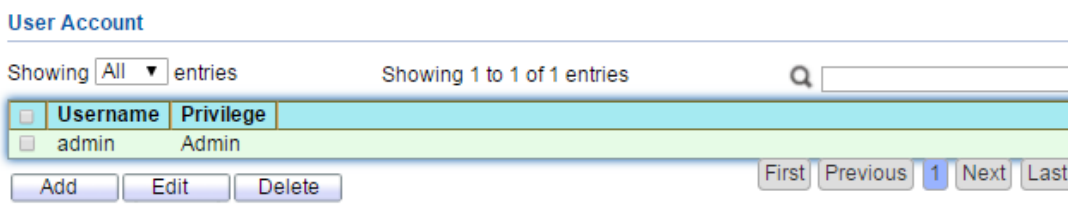


Figure 146 - Management > User Account

Item	Description
Username	User name of the account.
Privilege	Select privilege level for new account. <ul style="list-style-type: none"> Admin: Allow to change switch settings. Privilege value equals to 15. User: See switch settings only. Not allow to change it. Privilege level equals to 1.

Click "Add" button to view the Add User Account menu.

Add User Account

Username	<input style="width: 80%;" type="text"/>
Password	<input style="width: 80%;" type="password"/>
Confirm Password	<input style="width: 80%;" type="password"/>
Privilege	<input checked="" type="radio"/> Admin <input type="radio"/> User

Figure 147 - Management > User Account > Add User Account

Item	Description
Username	User name of the account.
Password	Set password of the account.
Confirm Password	Set the same password of the account as in “Password” field.
Privilege	Select privilege level for new account. <ul style="list-style-type: none"> • Admin: Allow to change switch settings. Privilege value equals to 15. • User: See switch settings only. Not allow to change it. Privilege level equals to 1.

4.14.2. Firmware

4.14.2.1. Upgrade / Backup

This page allow user to upgrade or backup firmware image through HTTP or TFTP server.

To view the Firmware Upgrade/Backup menu, navigate to Management >

Firmware > Upgrade/Backup.

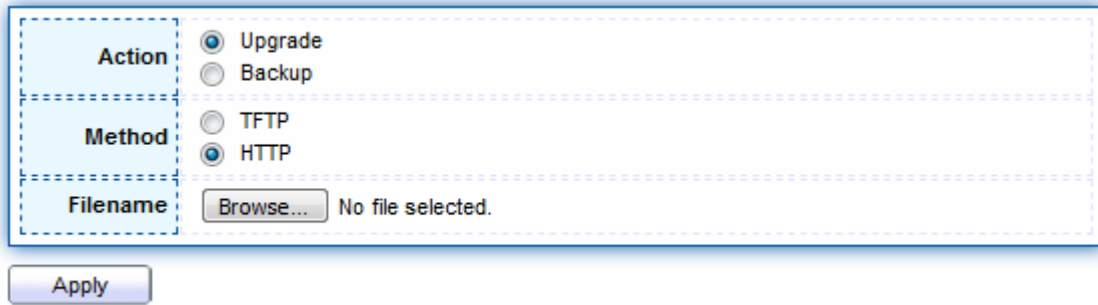


Figure 148 - Management > Firmware > Upgrade/Backup

Item	Description
Action	Firmware operations <ul style="list-style-type: none"> • Upgrade: Upgrade firmware from remote host to DUT • Backup: Backup firmware image from DUT to remote host
Method	Firmware upgrade / backup method <ul style="list-style-type: none"> • TFTP: Using TFTP to upgrade/backup firmware. • HTTP: Using WEB browser to upgrade/backup firmware.
Filename	Use browser to upgrade firmware, you should select firmware image file on your host PC.

To view the Firmware Upgrade/Backup menu, navigate to Management > Firmware > Upgrade/Backup.


Action	<input type="radio"/> Upgrade <input type="radio"/> Backup
Method	<input checked="" type="radio"/> TFTP <input type="radio"/> HTTP
Address Type	<input type="radio"/> Hostname <input type="radio"/> IPv4 <input type="radio"/> IPv6
Server Address	<input type="text"/>
Filename	<input type="text"/>

Apply

Figure 149 - Management > Firmware > Upgrade/Backup

Item	Description
Action	Firmware operations <ul style="list-style-type: none"> Upgrade: Upgrade firmware from remote host to DUT Backup: Backup firmware image from DUT to remote host
Method	Firmware upgrade / backup method <ul style="list-style-type: none"> TFTP: Using TFTP to upgrade/backup firmware. HTTP: Using WEB browser to upgrade/backup firmware.
Address Type	Specify TFTP server address type <ul style="list-style-type: none"> Hostname: Use domain name as server address IPv4: Use IPv4 as server address IPv6: Use IPv6 as server address
Server Address	Specify TFTP server address.
Filename	Firmware image file name on remote TFTP server

To view the Firmware Upgrade/Backup menu, navigate to Management > Firmware > Upgrade/Backup.

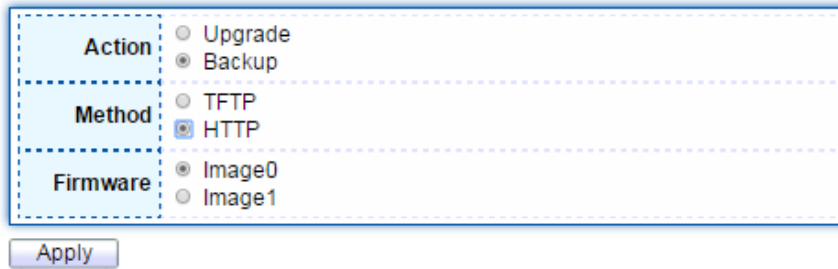


Action	<input type="radio"/> Upgrade <input checked="" type="radio"/> Backup
Method	<input type="radio"/> TFTP <input checked="" type="radio"/> HTTP
Firmware	<input type="radio"/> Image0 <input type="radio"/> Image1

Apply

Figure 150 - Management > Firmware > Upgrade/Backup

Item	Description
Action	Firmware operations <ul style="list-style-type: none"> Upgrade: Upgrade firmware from remote host to DUT Backup: Backup firmware image from DUT to remote host
Method	Firmware upgrade / backup method <ul style="list-style-type: none"> TFTP: Using TFTP to upgrade/backup firmware. HTTP: Using WEB browser to upgrade/backup firmware.
Filename	Firmware partition need to backup <ul style="list-style-type: none"> Image0: Firmware image in flash partition 0 Image1: Firmware image in flash partition 1

To view the Firmware Upgrade/Backup menu, navigate to Management > Firmware > Upgrade/Backup.

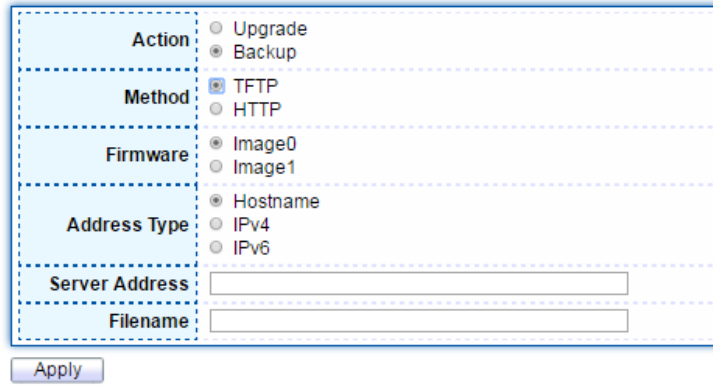

The screenshot shows a configuration form for Firmware Upgrade/Backup. It is divided into several sections:

- Action:** Radio buttons for Upgrade and Backup.
- Method:** Radio buttons for TFTP (selected) and HTTP.
- Firmware:** Radio buttons for Image0 and Image1.
- Address Type:** Radio buttons for Hostname, IPv4, and IPv6.
- Server Address:** A text input field.
- Filename:** A text input field.

An "Apply" button is located at the bottom left of the form.

Figure 151 - Management > Firmware > Upgrade/Backup


Item	Description
Action	Firmware operations <ul style="list-style-type: none"> Upgrade: Upgrade firmware from remote host to DUT Backup: Backup firmware image from DUT to remote host
Method	Firmware upgrade / backup method <ul style="list-style-type: none"> TFTP: Using TFTP to upgrade/backup firmware. HTTP: Using WEB browser to upgrade/backup firmware.
Filename	Firmware partition need to backup <ul style="list-style-type: none"> Image0: Firmware image in flash partition 0. Image1: Firmware image in flash partition 1.
Address Type	Specify TFTP server address type <ul style="list-style-type: none"> Hostname: Use domain name as server address. IPv4: Use IPv4 as server address.

	<ul style="list-style-type: none"> • IPv6: Use IPv6 as server address.
Server Address	Specify TFTP server address address.
Filename	File name saved on remote TFTP server.

4.14.2.2. Active Image

This page allow user to select firmware image on next booting and show firmware information on both flash partitions.

To view the Active Image menu, navigate to Management > Firmware > Active Image.

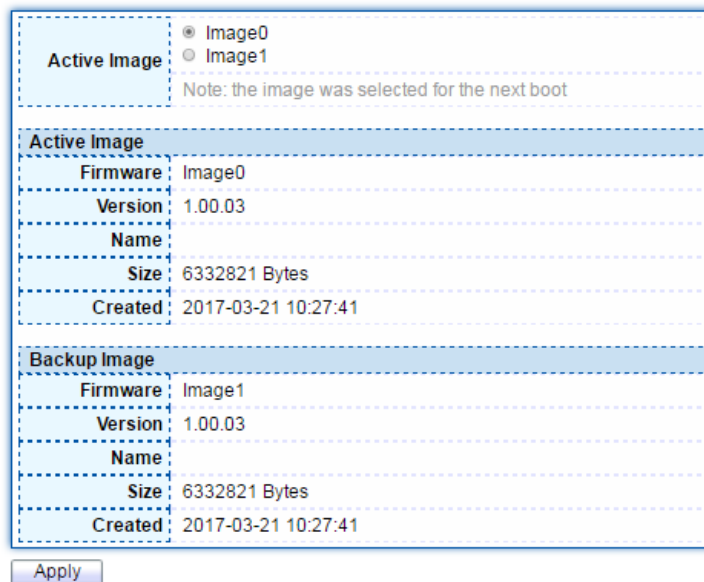

Active Image	
<input checked="" type="radio"/>	Image0
<input type="radio"/>	Image1
Note: the image was selected for the next boot	
Active Image	
Firmware	Image0
Version	1.00.03
Name	
Size	6332821 Bytes
Created	2017-03-21 10:27:41
Backup Image	
Firmware	Image1
Version	1.00.03
Name	
Size	6332821 Bytes
Created	2017-03-21 10:27:41
<input type="button" value="Apply"/>	

Figure 152 - Management > Firmware > Active Image

Item	Description
Active Image	Select firmware image to use on next booting
Firmware	Firmware flash partition name.
Version	Firmware version.

Name	Firmware name.
Size	Firmware image size.
Created	Firmware image created date.

4.14.3. Configuration

4.14.3.1. Upgrade / Backup

To view the Configuration Upgrade/Backup menu, navigate to Management > Configuration > Upgrade/Backup.


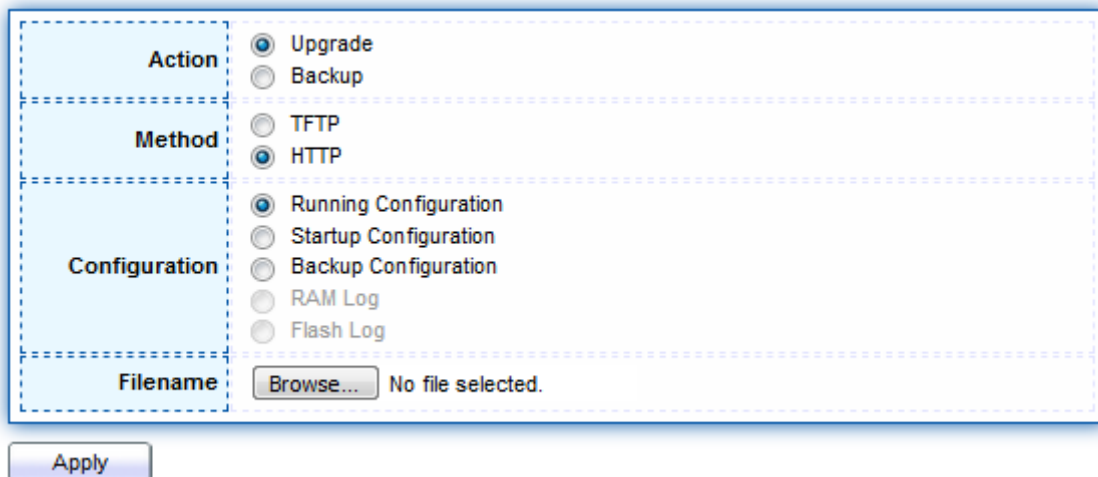


Figure 153 - Management > Configuration > Upgrade/Backup

Item	Description
Action	Configuration operations <ul style="list-style-type: none"> • Upgrade: Upgrade firmware from remote host to DUT • Backup: Backup firmware image from DUT to remote host
Method	Configuration upgrade / backup method

	<ul style="list-style-type: none"> • TFTP: Using TFTP to upgrade/backup firmware • HTTP: Using WEB browser to upgrade/backup firmware
Configuration	Configuration types <ul style="list-style-type: none"> • Running Configuration: Merge to current running configuration file • Startup Configuration: Replace startup configuration file • Backup Configuration: Replace backup configuration file
Filename	Use browser to upgrade configuration, you should select configuration file on your host PC.

To view the Configuration Upgrade/Backup menu, navigate to Management > Configuration > Upgrade/Backup.

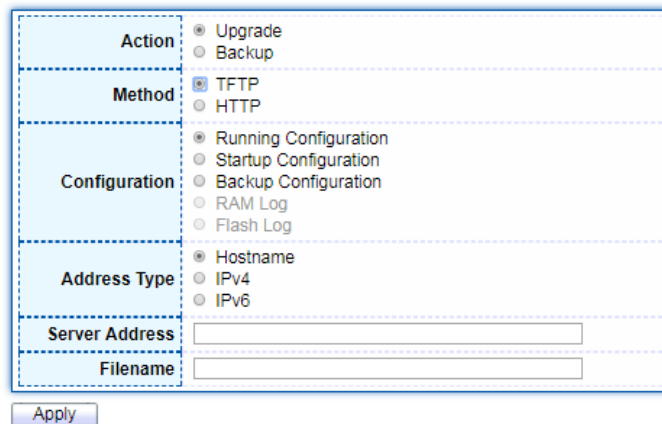

Action	<input checked="" type="radio"/> Upgrade <input type="radio"/> Backup
Method	<input checked="" type="radio"/> TFTP <input type="radio"/> HTTP
Configuration	<input checked="" type="radio"/> Running Configuration <input type="radio"/> Startup Configuration <input type="radio"/> Backup Configuration <input type="radio"/> RAM Log <input type="radio"/> Flash Log
Address Type	<input checked="" type="radio"/> Hostname <input type="radio"/> IPv4 <input type="radio"/> IPv6
Server Address	<input type="text"/>
Filename	<input type="text"/>

Figure 154 - Management > Configuration > Upgrade/Backup

Item	Description
Action	Configuration operations <ul style="list-style-type: none"> • Upgrade: Upgrade firmware from remote host to DUT • Backup: Backup firmware image from DUT to remote host
Method	Configuration upgrade / backup method <ul style="list-style-type: none"> • TFTP: Using TFTP to upgrade/backup firmware • HTTP: Using WEB browser to upgrade/backup firmware
Configuration	Configuration types <ul style="list-style-type: none"> • Running Configuration: Merge to current running configuration file • Startup Configuration: Replace startup configuration file • Backup Configuration: Replace backup configuration file
Address Type	Specify TFTP server address type <ul style="list-style-type: none"> • Hostname: Use domain name as server address • IPv4: Use IPv4 as server address • IPv6: Use IPv6 as server address
Server Address	Specify TFTP server address address.
Filename	File name saved on remote TFTP server.

To view the Configuration Upgrade/Backup menu, navigate to Management > Configuration > Upgrade/Backup.

Action	<input type="radio"/> Upgrade <input type="radio"/> Backup
Method	<input type="radio"/> TFTP <input checked="" type="radio"/> HTTP
Configuration	<input type="radio"/> Running Configuration <input type="radio"/> Startup Configuration <input type="radio"/> Backup Configuration <input type="radio"/> RAM Log <input type="radio"/> Flash Log

Figure 155 - Management > Configuration > Upgrade/Backup

Item	Description
Action	Configuration operations <ul style="list-style-type: none"> • Upgrade: Upgrade firmware from remote host to DUT • Backup: Backup firmware image from DUT to remote host
Method	Configuration upgrade / backup method <ul style="list-style-type: none"> • TFTP: Using TFTP to upgrade/backup firmware • HTTP: Using WEB browser to upgrade/backup firmware
Configuration	Configuration types <ul style="list-style-type: none"> • Running Configuration: Backup running configuration file. • Startup Configuration: Backup start configuration file. • Backup Configuration: Backup backup configuration file. • RAM Log: Backup log file stored in RAM. • Flash Log: Backup log files store in Flash.

To view the Configuration Upgrade/Backup menu, navigate to Management > Configuration > Upgrade/Backup.

Action	<input type="radio"/> Upgrade <input type="radio"/> Backup
Method	<input checked="" type="radio"/> TFTP <input type="radio"/> HTTP
Configuration	<input type="radio"/> Running Configuration <input type="radio"/> Startup Configuration <input type="radio"/> Backup Configuration <input type="radio"/> RAM Log <input type="radio"/> Flash Log
Address Type	<input type="radio"/> Hostname <input type="radio"/> IPv4 <input type="radio"/> IPv6
Server Address	<input type="text"/>
Filename	<input type="text"/>

Figure 156 - Management > Configuration > Upgrade/Backup

Item	Description
Action	Configuration operations <ul style="list-style-type: none"> Upgrade: Upgrade firmware from remote host to DUT Backup: Backup firmware image from DUT to remote host
Method	Configuration upgrade / backup method <ul style="list-style-type: none"> TFTP: Using TFTP to upgrade/backup firmware HTTP: Using WEB browser to upgrade/backup firmware
Configuration	Configuration types <ul style="list-style-type: none"> Running Configuration: Backup running configuration file. Startup Configuration: Backup start configuration file. Backup Configuration: Backup backup configuration file. RAM Log: Backup log file stored in RAM. Flash Log: Backup log files store in Flash.
Address Type	Specify TFTP server address type

	<ul style="list-style-type: none"> • Hostname: Use domain name as server address • IPv4: Use IPv4 as server address • IPv6: Use IPv6 as server address
Server Address	Specify TFTP server address address.
Filename	File name saved on remote TFTP server.

4.14.3.2. Save Configuration

To view the Save Configuration menu, navigate to Management > Configuration > Save Configuration.

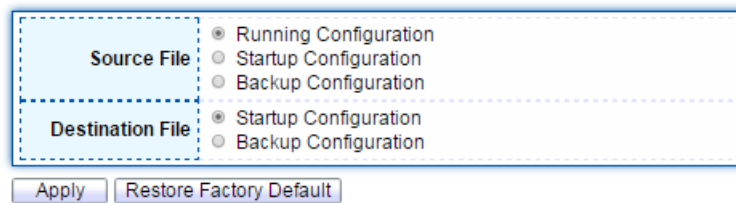


Figure 157 - Management > Configuration > Save Configuration

Item	Description
Source File	Source file types <ul style="list-style-type: none"> • Running Configuration: Copy running configuration file to destination • Startup Configuration: Copy startup configuration file to destination • Backup Configuration: Copy backup configuration file to destination
Destination File	Destination file

	<ul style="list-style-type: none"> • Startup Configuration: Save file as startup configuration • Backup Configuration: Save file as backup configuration
--	--

4.14.4. SNMP

4.14.4.1. View

To view the SNMP View menu, navigate to Management > SNMP > View.

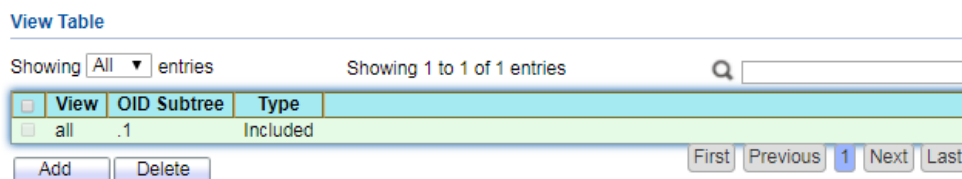


Figure 158 - Management > SNMP > View

Item	Description
View	The SNMP view name. Its maximum length is 30 characters.
OID Subtree	Specify the ASN.1 subtree object identifier (OID) to be included or excluded from the SNMP view.
Type	Include or exclude the selected MIBs in the view.

4.14.4.2. Group

To view the SNMP Group menu, navigate to Management > SNMP > Group.

Group Table

Showing entries Showing 1 to 1 of 1 entries

Group	Version	Security Level	View		
			Read	Write	Notify
<input type="checkbox"/> 12	SNMPv1	No Security	all		

Configure [SNMP View](#) to associate a non-default view with a group.

Figure 159 - Management > SNMP > Group

Item	Description
Group	Specify SNMP group name, and the maximum length is 30 characters.
Version	Specify SNMP version <ul style="list-style-type: none"> • SNMPv1: SNMP Version 1. • SNMPv2: Community-based SNMP Version 2. • SNMPv3: User security model SNMP version 3.
Security Level	Specify SNMP security level <ul style="list-style-type: none"> • No Security : Specify that no packet authentication is performed. • Authentication: Specify that no packet authentication without encryption is performed. • Authentication and Privacy: Specify that no packet authentication with encryption is performed.
View	
Read	Group read view name.
Write	Group write view name.
Notify	The view name that sends only traps with contents that is

	included in SNMP view selected for notification.
--	--

Click "Add" button to view the Add SNMP Group menu.

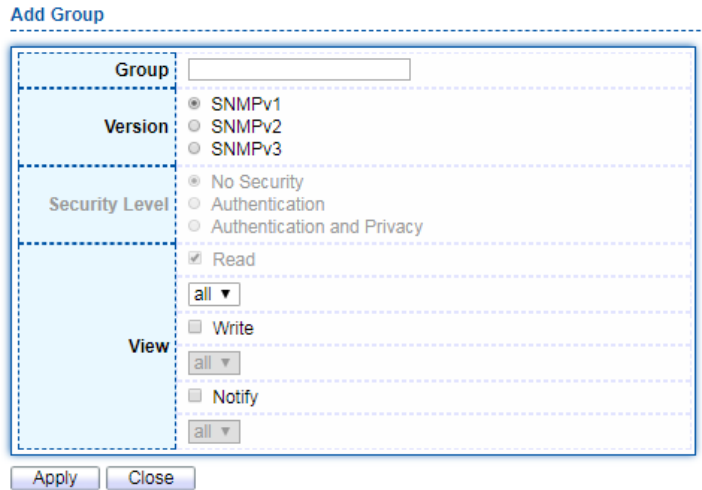


Figure 160 - Management > SNMP > Group > Add Group

Item	Description
Group	Specify SNMP group name, and the maximum length is 30 characters.
Version	Specify SNMP version <ul style="list-style-type: none"> • SNMPv1: SNMP Version 1. • SNMPv2: Community-based SNMP Version 2. • SNMPv3: User security model SNMP version 3.
Security Level	Specify SNMP security level <ul style="list-style-type: none"> • No Security : Specify that no packet authentication is performed. • Authentication: Specify that no packet authentication

	without encryption is performed. <ul style="list-style-type: none"> • Authentication and Privacy: Specify that no packet authentication with encryption is performed.
View	
Read	Select read view name if Read is checked.
Write	Select write view name, if Write is checked.
Notify	Select notify view name, if Notify is checked.

4.14.4.3. Community

To view the Community menu, navigate to Management > SNMP > Community.

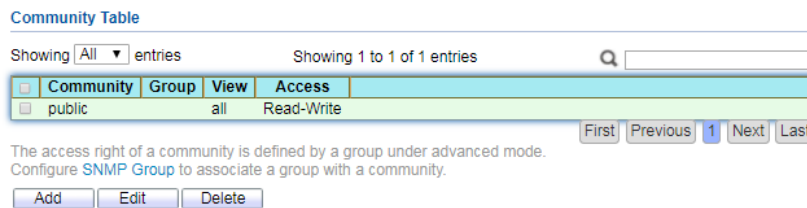


Figure 161 - Management > SNMP > Community

Item	Description
Community	The SNMP community name. Its maximum length is 20 characters.
Group	Specify the SNMP group configured by the command snmp group to define the object available to the community.
View	Specify the SNMP view to define the object available to the community.

Access	SNMP access mode <ul style="list-style-type: none"> • Read-Only: Read only. • Read-Write: Read and write.
--------	---

Click "Add" button to view the Add Community menu.

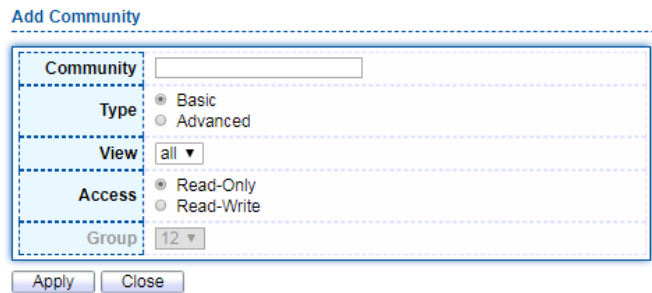


Figure 162 - Management > SNMP > Group > Add Community

Item	Description
Community	The SNMP community name. Its maximum length is 20 characters.
Type	SNMP Community mode <ul style="list-style-type: none"> • Basic: SNMP community specifies view and access right. • Advanced: SNMP community specifies group.
View	Specify the SNMP view to define the object available to the community.
Access	SNMP access mode <ul style="list-style-type: none"> • Read-Only: Read only.

	<ul style="list-style-type: none"> • Read-Write: Read and write.
Group	Specify the SNMP group configured by the command snmp group to define the object available to the community.

4.14.4.4. User

To view the User menu, navigate to Management > SNMP > User.

User Table

Showing entries Showing 1 to 1 of 1 entries

<input type="checkbox"/>	User	Group	Security Level	Authentication Method	Privacy Method
<input type="checkbox"/>	admin	12	No Security	None	None

Configure [SNMP Group](#) to associate an SNMPv3 group with an SNMPv3 user.

Navigation:

Figure 163 - Management > SNMP > User

Item	Description
User	Specify the SNMP user name on the host that connects to the SNMP agent. The max character is 30 characters. For the SNMP v1 or v2c, the user name must match the community name.
Group	Specify the SNMP group to which the SNMP user belongs.
Security Level	SNMP privilege mode <ul style="list-style-type: none"> • No Security : Specify that no packet authentication is performed. • Authentication: Specify that no packet authentication

	without encryption is performed. <ul style="list-style-type: none"> • Authentication and Privacy: Specify that no packet authentication with encryption is performed.
Authentication Method	Authentication Protocol which is available when Privilege Mode is Authentication or Authentication and Privacy. <ul style="list-style-type: none"> • None: No authentication required. • MD5: Specify the HMAC-MD5-96 authentication protocol. • SHA: Specify the HMAC-SHA-96 authentication protocol
Privacy Method	Encryption Protocol <ul style="list-style-type: none"> • None: No privacy required. • DES: DES algorithm

Click "Add" button to view Add User menu.

Add User

User	<input type="text"/>
Group	12 ▼
Security Level	<input checked="" type="radio"/> No Security <input type="radio"/> Authentication <input type="radio"/> Authentication and Privacy
Authentication	
Method	<input checked="" type="radio"/> None <input type="radio"/> MD5 <input type="radio"/> SHA
Password	<input type="password"/>
Privacy	
Method	<input checked="" type="radio"/> None <input type="radio"/> DES
Password	<input type="password"/>

Figure 164 - Management > SNMP > User > Add User

Item	Description
User	Specify the SNMP user name on the host that connects to the SNMP agent. The max character is 30 characters.
Group	Specify the SNMP group to which the SNMP user belongs.
Security Level	SNMP privilege mode <ul style="list-style-type: none"> • No Security : Specify that no packet authentication is performed. • Authentication: Specify that no packet authentication without encryption is performed. • Authentication and Privacy: Specify that no packet authentication with encryption is performed.
Authentication	
Method	Authentication Protocol which is available when Privilege Mode is Authentication or Authentication and Privacy. <ul style="list-style-type: none"> • None: No authentication required. • MD5: Specify the HMAC-MD5-96 authentication protocol. • SHA: Specify the HMAC-SHA-96 authentication protocol.
Password	The authentication password, The number of character range is 8 to 32 characters.
Privacy	
Method	Encryption Protocol <ul style="list-style-type: none"> • None: No privacy required. • DES: DES algorithm
Password	The privacy password, The number of character range is 8 to 64 characters.

4.14.4.5. Engine ID

To view the Engine ID menu, navigate to Management > SNMP > Engine ID.

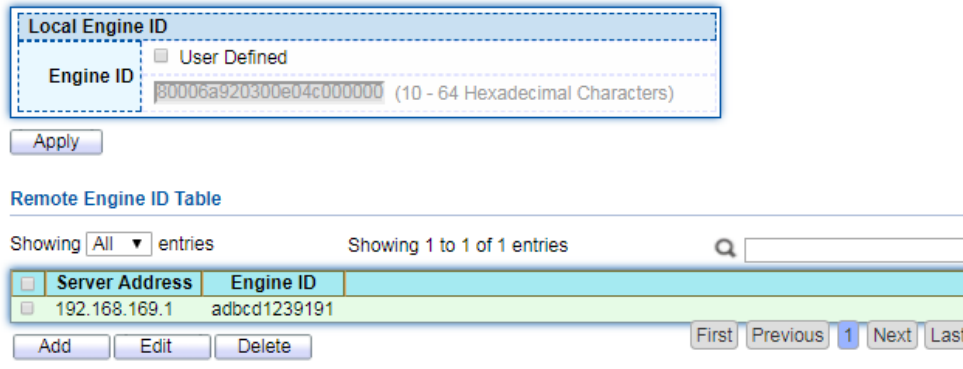


Figure 165 - Management > SNMP > Engine ID

Item	Description
Local Engine ID	
Engine ID	<p>If checked “User Defined” , the local engine ID is configure by user, else use the default Engine ID which is made up of MAC and Enterprise ID.</p> <p>The user defined engine ID is range 10 to 64 hexadecimal characters, and the hexadecimal number must be divided by 2.</p>
Remote Engine ID Table	
Table	
Server Address	Remote host.
Engine ID	Specify Remote SNMP engine ID. The engine ID is range10 to 64 hexadecimal characters, and the hexadecimal number must be divided by 2.

To view the Engine ID menu, navigate to Management > SNMP > Engine ID.

Add Remote Engine ID

Address Type

Hostname
 IPv4
 IPv6

Server Address

Engine ID

(10 - 64 Hexadecimal Characters)

Figure 166 - Management > SNMP > Engine ID

Item	Description
Address Type	Remote host address type for Hostname/IPv4/IPv6.
Server Address	Remote host.
Engine ID	Specify Remote SNMP engine ID. The engine ID is range 10 to 64 hexadecimal characters, and the hexadecimal number must be divided by 2.

4.14.4.6. Trap Event

To view the SNMP Trap Event menu, navigate to Management > SNMP > Trap Event.

Authentication Failure	<input checked="" type="checkbox"/> Enable
Link Up / Down	<input checked="" type="checkbox"/> Enable
Cold Start	<input checked="" type="checkbox"/> Enable
Warm Start	<input checked="" type="checkbox"/> Enable

Apply

Figure 167 - Management > SNMP > Trap Event

Item	Description
Authentication Failure	SNMP authentication failure trap, when community not match or user authentication password not match.
Link Up/Down	Port link up or down trap.
Cold Start	Device reboot configure by user trap.
Warm Start	Device reboot by power down trap.

4.14.4.7. Notification

To view the Notification menu, navigate to Management > SNMP > Notification.

Notification Table

Showing All entries Showing 1 to 1 of 1 entries

<input type="checkbox"/>	Server Address	Server Port	Timeout	Retry	Version	Type	Community / User	Security Level
<input type="checkbox"/>	192.168.169.1	162			SNMPv3	Trap	admin	No Security

For SNMPv1,2 Notification, [SNMP Community](#) needs to be defined.
For SNMPv3 Notification, [SNMP User](#) must be created.

Figure 168 - Management > SNMP > Notification

Item	Description
Server Address	IP address or the hostname of the SNMP trap recipients.
Server Port	Recipients server UDP port number.
Timeout	Specify the SNMP informs timeout.
Retry	Specify the retry counter of the SNMP informs.
Version	Specify SNMP notification version <ul style="list-style-type: none"> • SNMPv1: SNMP Version 1 notification. • SNMPv2: SNMP Version 2 notification. • SNMPv3: SNMP Version 3 notification.
Type	Notification Type <ul style="list-style-type: none"> • Trap: Send SNMP traps to the host. • Inform: Send SNMP informs to the host.
Community/User	SNMP community/user name for notification. If version is SNMPv3 the name is user name, else is community name.
UDP Port	Specify the UDP port number.
Timeout	Specify the SNMP informs timeout.
Security Level	SNMP trap packet security level <ul style="list-style-type: none"> • No Security: Specify that no packet authentication is performed. • Authentication: Specify that no packet authentication without encryption is performed. • Authentication and Privacy: Specify that no packet authentication with encryption is performed.

Click "Add" button to view the Notification menu.

Add Notification

Address Type	<input checked="" type="radio"/> Hostname <input type="radio"/> IPv4 <input type="radio"/> IPv6
Server Address	<input type="text"/>
Version	<input checked="" type="radio"/> SNMPv1 <input type="radio"/> SNMPv2 <input type="radio"/> SNMPv3
Type	<input checked="" type="radio"/> Trap <input type="radio"/> Inform
Community / User	<input type="text" value="public"/>
Security Level	<input checked="" type="radio"/> No Security <input type="radio"/> Authentication <input type="radio"/> Authentication and Privacy
Server Port	<input checked="" type="checkbox"/> Use Default <input type="text" value="162"/> (1 - 65535, default 162)
Timeout	<input checked="" type="checkbox"/> Use Default <input type="text" value="15"/> Sec (1 - 300, default 15)
Retry	<input checked="" type="checkbox"/> Use Default <input type="text" value="3"/> (1 - 255, default 3)

Figure 169 - Management > SNMP > Notification > Add Notification

Item	Description
Address Type	Notify recipients host address type.
Server Address	IP address or the hostname of the SNMP trap recipients.
Version	Specify SNMP notification version <ul style="list-style-type: none"> • SNMPv1: SNMP Version 1 notification. • SNMPv2: SNMP Version 2 notification. • SNMPv3: SNMP Version 3 notification.

Type	Notification Type <ul style="list-style-type: none"> • Trap: Send SNMP traps to the host. • Inform: Send SNMP informs to the host.(version 1 have no inform)
Community/User	SNMP community/user name for notification. If version is SNMPv3 the name is user name, else is community name.
Security Level	SNMP notification packet security level, the security level must less than or equal to the community/user name <ul style="list-style-type: none"> • No Security: Specify that no packet authentication is performed. • Authentication: Specify that no packet authentication without encryption is performed. • Authentication and Privacy: Specify that no packet authentication with encryption is performed.
Server Port	Recipients server UDP port number, if “use default” checked the value is 162, else user configure.
Timeout	Specify the SNMP informs timeout, if “use default” checked the value is 15, else user configure.
Retry	Specify the SNMP informs retry count, if “use default” checked the value is 3, else user configure.

4.15.5. RMON

4.15.5.1. Statistics

To display RMON Statistics, click **Management > RMON > Statistics**.

Statistics Table

Refresh Rate sec

Entry	Port	Bytes Received	Drop Events	Packets Received	Broadcast Packets	Multicast Packets	CRC & Align Errors	Undersize Packets	Oversize Packets	Fragments	Jabbers	Collisions	Frames of 64 Bytes	Frames of 65 to 127 Bytes	Frames of 128 to 255 Bytes	Frames of 256 to 511 Bytes	Frames of 512 to 1023 Bytes	Frames Greater than 1024 Bytes
<input type="checkbox"/>	1 GE1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<input type="checkbox"/>	2 GE2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<input type="checkbox"/>	3 GE3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<input type="checkbox"/>	19 LAG7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<input type="checkbox"/>	20 LAG8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Figure 215 - Management > RMON > Statistics

Item	Description
Port	The port for the RMON statistics.
Bytes Received	Number of octets received, including bad packets and FCS octets, but excluding framing bits.
Drop Events	Number of packets that were dropped.
Packets Received	Number of packets received, including bad packets, Multicast packets, and Broadcast packets.
Broadcast Packets	Number of good Broadcast packets received. This number does not include Multicast packets.
Multicast Packets	Number of good Multicast packets received.
CRC & Align Errors	Number of CRC and Align errors that have occurred.
Undersize Packets	Number of undersized packets (less than 64 octets) received.
Oversize Packets	Number of oversized packets (over 1518 octets) received.
Fragments	Number of fragments (packets with less than 64 octets, excluding framing bits, but including FCS octets) received.
	Number of received packets that were longer than 1632 octets. This number excludes frame bits, but includes FCS octets that had either a bad FCS (Frame Check Sequence) with an integral number of octets (FCS Error) or a bad FCS

Jabbers	<p>with a non-integral octet (Alignment Error) number. A Jabber packet is defined as an Ethernet frame that satisfies the following criteria: •</p> <ul style="list-style-type: none"> • Packet data length is greater than MRU. • Packet has an invalid CRC. • RX error event has not been detected.
Collisions	Number of collisions received. If Jumbo Frames are enabled, the threshold of Jabber Frames is raised to the maximum size of Jumbo Frames.
Frames of 64 Bytes	Number of frames, containing 64 bytes that were received.
Frames of 65 to 27 Bytes	Number of frames, containing 65 to 127 bytes that were received.
Frames of 128 to 225 Bytes	Number of frames, containing 128 to 255 bytes that were received.
Frames of 256 to 511 Bytes	Number of frames, containing 256 to 511 bytes that were received.
Frames of 512 to 1023 Bytes	Number of frames, containing 512 to 1023 bytes that were received.
Frames Greater than 1024 Bytes	Number of frames, containing 1024 to 1518 bytes that were received.
Clear	Clear the statistics for the selected ports.
View	View the statistics on the specified port.

Click "View" button to view the view Port Statistics menu.

View Port Statistics

Port	LAG7
Refresh Rate	<input checked="" type="radio"/> None <input type="radio"/> 5 sec <input type="radio"/> 10 sec <input type="radio"/> 30 sec
Received Bytes (Octets)	0
Drop Events	0
Received Packets	0
Broadcast Packets Received	0
Multicast Packets Received	0
CRC & Align Errors	0
Undersize Packets	0
Oversize Packets	0
Fragments	0
Jabbers	0
Collisions	0
Frames of 64 Bytes	0
Frames of 65 to 127 Bytes	0
Frames of 128 to 255 Bytes	0
Frames of 256 to 511 Bytes	0
Frames Greater than 1024 Bytes	0

Figure 216 - Management > RMON > Statistics

4.15.5.2. History

For the RMON history, click **Management > RMON > History**.

History Table

Showing entries Showing 0 to 0 of 0 entries

<input type="checkbox"/>	Entry	Port	Interval	Owner	Sample	
					Maximum	Current
0 results found.						

Figure 217 - Management > RMON > History

Item	Description
Port	The port for the RMON history.
Interval	The number of seconds for each sample.
Owner	The owner name of event (0~31 characters).
Sample Maximum	The maximum number of buckets.
Sample Current	The current number of buckets.
Add	Add the new RMON history entries
Edit	Edit the RMON history
Delete	Delete the RMON histories
View	View the history log.

Click "Add/Edit" button to Add/Edit the History menu.

Add History

Entry 1

Port GE1

Max Sample 50 (1 - 50, default 50)

Interval 1800 (1 - 3600, default 1800)

Owner

Apply Close

Edit History

Entry undefined

Port GE1

Max Sample 0 (1 - 50, default 50)

Interval 0 (1 - 3600, default 1800)

Owner

Apply Close

Figure 218 - Management > RMON > Add /Edit History

Item	Description
Port	Specify port for the RMON history.
Max Sample	Specify the maximum number of buckets.
Interval	Specify the number of seconds for each sample.
Owner	Specify the owner name of event (0~31 characters).

Click "View" button to view the History menu.

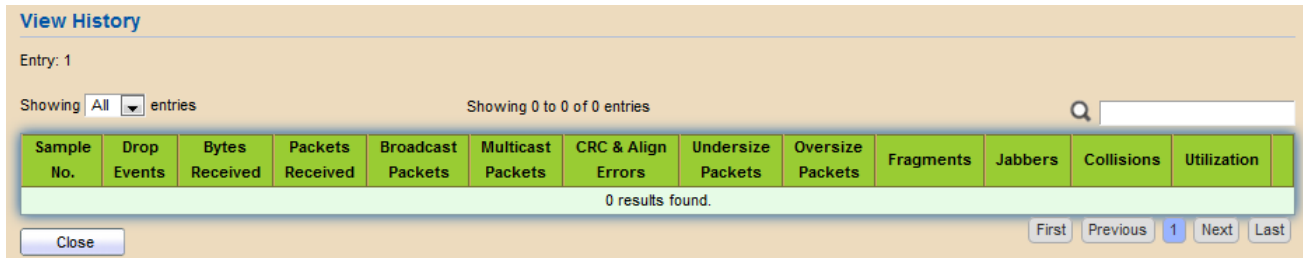


Figure 219 - Management > RMON > View History

Item	Description
Port	The port for the RMON statistics.
Bytes Received	Number of octets received, including bad packets and FCS. octets, but excluding framing bits
Drop Events	Number of packets that were dropped.
Packets Received	Number of packets received, including bad packets, Multicast packets, and Broadcast packets.
Broadcast Packets	Number of good Broadcast packets received. This number does not include Multicast packets.
Multicast Packets	Number of good Multicast packets received.

CRC & Align Errors	Number of CRC and Align errors that have occurred.
Undersize Packages	Number of undersized packets (less than 64 octets) received.
Oversize Packages	Number of oversized packets (over 1518 octets) received.
Fragments	Number of fragments (packets with less than 64 octets, excluding framing bits, but including FCS octets) received.
Jabbers	<p>Number of received packets that were longer than 1632 octets. This number excludes frame bits, but includes FCS octets that had either a bad FCS (Frame Check Sequence) with an integral number of octets (FCS Error) or a bad FCS with a non-integral octet (Alignment Error) number. A Jabber packet is defined as an Ethernet frame that satisfies the following criteria: <input type="checkbox"/></p> <ul style="list-style-type: none"> • Packet data length is greater than MRU. • Packet has an invalid CRC. • RX error event has not been detected.
Collision	Number of collisions received. If Jumbo Frames are enabled, the threshold of Jabber Frames is raised to the maximum. size of Jumbo Frames.
Utilization	Percentage of current interface traffic compared to the maximum traffic that the interface can handle.

4.15.5.3. Event

For the RMON event, click **Management > RMON > Event**.

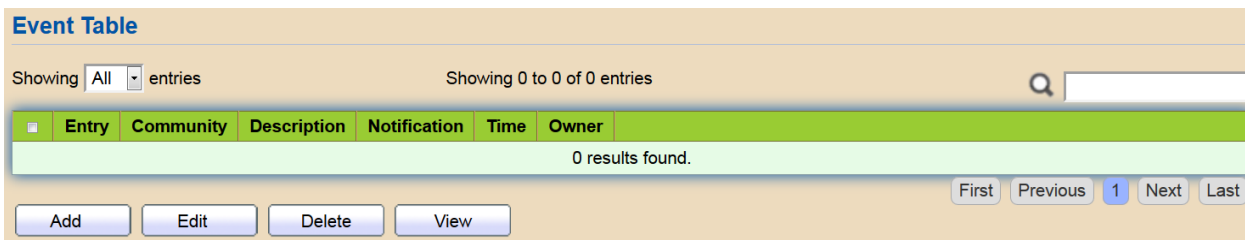


Figure 220 - Management > RMON > Event

Item	Description
Community	The SNMP community when the notification type is specified as trap
Description	The description for the event
Notification	The notification type for the event, and the possible value are: <ul style="list-style-type: none"> • None: Nothing for notification. • Event Log: Logging the event in the RMON Event Log table. • Trap: Send a SNMP trap. · • Event Log and Trap: Logging the event and send the SNMP trap.
Time	The time that the event was triggered.
Owner	The owner for the event.

Click "Add/Edit" button to view the Add/Edit Event menu.

Add Event

Entry	1
Notification	<input checked="" type="radio"/> None <input type="radio"/> Event Log <input type="radio"/> Trap <input type="radio"/> Event Log and Trap
Community	Default Community
Description	Default Description
Owner	

Edit Event

Entry	undefined
Notification	<input checked="" type="radio"/> None <input type="radio"/> Event Log <input type="radio"/> Trap <input type="radio"/> Event Log and Trap
Community	
Description	
Owner	

Figure 221 - Management > RMON > Add/Edit Event

Item	Description
Notification	Specify the notification type for the event, and the possible value are: <ul style="list-style-type: none"> • None: Nothing for notification. • Event Log: Logging the event in the RMON Event Log table • Trap: Send a SNMP trap. • Event Log and Trap: Logging the event and send the SNMP trap
Community	Specify the SNMP community when the notification type is

	specified as “Trap” pr “Event Log and Trap”
Description	Specify the description for the event.
Owner	Specify owner for the event.

Click "View" button to view the View Event Log menu.

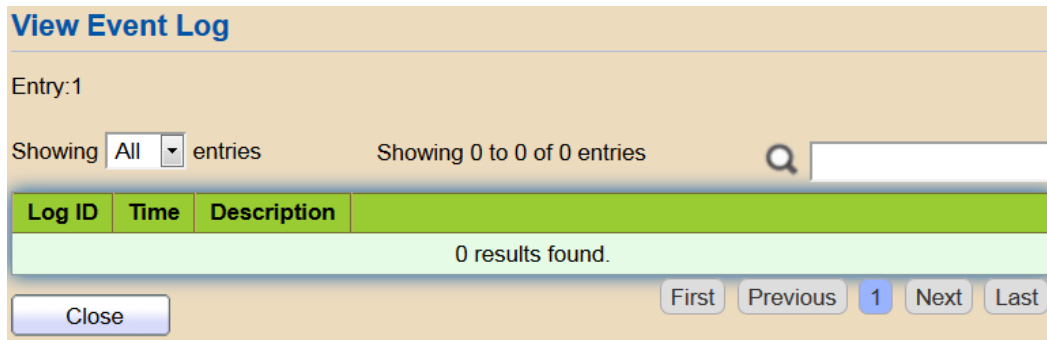


Figure 222 - Management > RMON > View Event Log

Item	Description
Log ID	The log identifier.
Time	The time that the event was triggered.
Description	The description for the event.

4.15.5.4. Alarm

For the RMON Alarm menu, click **Management > RMON > Alarm**.

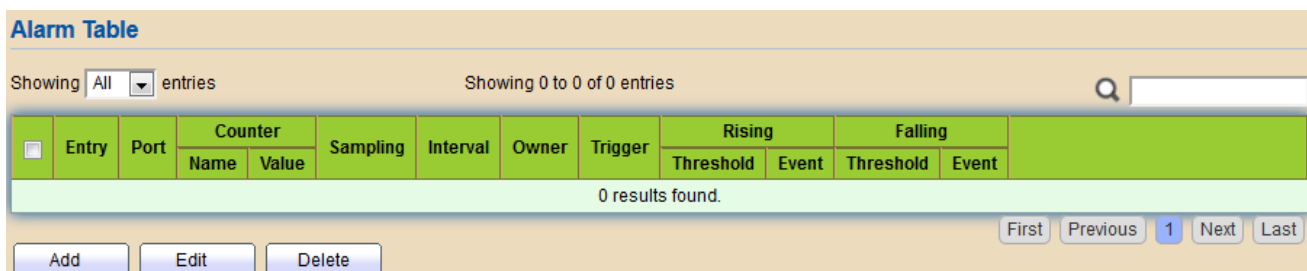


Figure 223 - Management > RMON > Alarm

Item	Description
Port	The port configuration for the RMON alarm.
Counter	The counter for sampling · <ul style="list-style-type: none"> • Drop Events (Drop Event): Total number of events received in which the packets were dropped. · • Octets (Received Bytes): Octets. · • Pkts (Received Packets): Number of packets.
	<ul style="list-style-type: none"> • BroadcastPkts (Broadcast Packets Received): Broadcast packets. · • MulticastPkts (Multicast Packets Received): Multicast packets. · • CRCAlignError (CRC and Align Error): CRC alignment error. · • UndersizePkts (Undersize Packets): Number of undersized packets. · • OversizePkts (Oversize Packets): Number of oversized packets. · • Fragments (Fragments): Total number of packet fragment. · • Jabbers (Jabbers): Total number of packet jabber. • Collisions (Collisions): Collision. · • Pkts64Octetes (Frames of 64 Bytes): Number of packets size 64 octets. ·

	<ul style="list-style-type: none"> • Pkts65to127Octetes (Frames of 65 to 127 Bytes): Number of packets size 65 to 127 octets. • Pkts128to255Octetes (Frames of 128 to 255 Bytes): Number of packets size 128 to 255 octets. • Pkts256to511Octetes (Frames of 256 to 511 Bytes): Number of packets size 256 to 511 octets. • Pkts512to1023Octetes (Frames of 512 to 1023 Bytes): Number of packets size 512 to 1023 octets. • Pkts1024to1518Octetes (Frames Greater than 1024 Bytes): Number of packets size 1024 to 1518 octets.
Sampling	The sampling type including: <ul style="list-style-type: none"> • Absolute: The selected variable value is compared directly with the thresholds at the end of the sampling interval. • Delta: The selected variable value of the last sample is subtracted from the current value and the difference is compared with the thresholds.
Interval	The number of seconds for each sample.
Owner	The owner for the alarm entry.
Trigger	The type of event triggering.
Rising Threshold	The threshold for firing rising event.
Rising Event	The rising event when alarm was fired.
Falling Threshold	The threshold for firing falling event.
Falling Event	The falling event when alarm was fired.

Click "Add/Edit" button to view the Add/Edit menu.

Add Alarm

Entry: 1

Port: GE1

Counter: Drop Events

Sampling: Absolute Delta

Interval: 100 Sec (1 - 2147483647, default 100)

Owner:

Trigger: Rising Falling Rising and Falling

Rising

Threshold: 100 (0 - 2147483647, default 100)

Event: 1 - Default Description

Falling

Threshold: 20 (0 - 2147483647, default 20)

Event: 1 - Default Description

Apply Close

Edit Alarm

Entry: undefined

Port: GE1

Counter: Drop Events

Sampling: Absolute Delta

Interval: 0 Sec (1 - 2147483647, default 100)

Owner:

Trigger: Rising Falling Rising and Falling

Rising

Threshold: 0 (0 - 2147483647, default 100)

Event: 1 - Default Description

Falling

Threshold: 0 (0 - 2147483647, default 20)

Event: 1 - Default Description

Apply Close

Figure 224 - Management > RMON > Add/Edit Alarm

Item	Description
Port	Specify the port for sampling
Counter	Specify the counter for sampling <ul style="list-style-type: none"> • Drop Event: Total number of events received in which the packets were dropped. • • Received Bytes (Octets): Octets. • Received Packets: Number of packets. • Broadcast Packets Received: Broadcast packets. • Multicast Packets Received: Multicast packets. • CRC and Align Error: CRC alignment error. • • Undersize Packets: Number of undersized packets.
	<ul style="list-style-type: none"> • Oversize Packets: Number of oversized packets. • Fragments: Total number of packet fragment.

	<ul style="list-style-type: none"> • Jabbers: Total number of packet jabber. • • Collisions: Collision. • • Frames of 64 Bytes: Number of packets size 64 octets. • Frames of 65 to 127 Bytes: Number of packets size 65 to 127 octets. • • Frames of 128 to 255 Bytes: Number of packets size 128 to 255 octets. • • Frames of 256 to 511 Bytes: Number of packets size 256 to 511 octets. • • Frames of 512 to 1023 Bytes: Number of packets size 512 to 1023 octets. • • Frames Greater than 1024 Bytes: Number of packets size 1024 to 1518 octets.
Sampling	Specify the sampling type. • <ul style="list-style-type: none"> • Absolute: The selected variable value is compared directly with the thresholds at the end of the sampling interval. • • Delta: The selected variable value of the last sample is subtracted from the current value and the difference is compared with the thresholds.
Interval	Specify the sampling interval.
Owner	Specify the owner for the sampling.
Trigger	Specify the type for the alarm trigger.
RISING	
Threshold	Specify the threshold for firing rising event.
Event	Specify the index of rising event when alarm was fired.

Falling	
Threshold	Specify the threshold for firing falling event.
Event	Specify the index of falling event when alarm was fired.

This product comes with lifetime warranty.
For further details about warranty policy and
product registration, please visit support
section of www.digisol.com

