



DG-GS4110

8 PORT L2 GIGABIT ETHERNET WEB MANAGED SWITCH WITH 2 GIGABIT SFP PORTS

Web Management User Guide

**V1.0
2020-1-22**

As our products undergo development the specifications are subject to change without prior notice

COPYRIGHT

Copyright 2020 by Digisol Systems Ltd. All rights reserved.

Company has an ongoing policy of upgrading its products and it may be possible that information in this document is not up-to-date.

Please check with your local distributors for latest information. No part of this document can be copied or reproduced in any form without written consent from the company.

Trademark

DIGISOL™ is a trademark of Digisol Systems Ltd. All other trademarks are the property of the respective manufacturers.

INDEX

About guide.....	3
Terminology / Usage	3
1 Product's introduction.....	4
Front panel	4
Real panel	4
2 Hardware installation	5
First step: open a seal	5
Second step: switch installation.....	5
Desktop or Shelf Installation	5
Rack Installation.....	6
Third step: Plugging in the AC Power Cord.....	6
Power failure	6
3 Getting Started	7
Management Option	7
Using Web-based Management.....	7
Supported Web Browsers	7
Connecting to the Switch	7
Login Web-based Management.....	7
1. WEB page elements.....	9
2. The structure of Navigation tree.....	9
3. Page button Introduction	10
4. Error messages	10
5. Entry Field	11
6. Status Field	11
1. System Configuration:	12
2. Port Configuration.....	18
3. MAC binding.....	24
4. MAC filtering	25
5. VLAN Configuration.....	26
6. SNMP Configuration.....	28
7. ACL Configuraion.....	30
8. QoS Configuration	33
9. IP Basic Configuration.....	34
10. Certification. Authorization. Accounting (AAA) configuration.....	36
11. Spanning Tree Protocol configuration	38
12. IGMP SNOOPING configuration.....	41
13. GMRP configuration.....	42
14. EAPS configuration	43
17. RMON configuration.....	44
18. Cluster configuration	47
19. log management.....	50

About guide

This guide provides instructions to install the Switch.



Note: The model you have purchased may appear slightly different from the illustrations shown in the document. Refer to the Product Instruction and Technical Specification sections for detailed information about your switch, its components, network connections, and technical specifications.

Terminology / Usage

In this guide, the term "Switch" (first letter capitalized) refers to the Web managed switch, and "switch" (first letter lower case) refers to other Ethernet switches. Some technologies refer to terms "switch", "bridge" and "switching hubs" interchangeably, and both are commonly accepted for Ethernet switches.



Note: indicates important information that helps a better use of the device.



Warning: indicates potential property damage or personal injury.

1 Product's introduction


Thanks for purchasing the Web Managed Ethernet Switch products.

The is a Web Managed Gigabit Ethernet Switch, It provides 8 10/100/1000Mbps Auto-Negotiation RJ45 ports and 2 Gigabit SFP Ports . It supports the port's full line speed forwarding to ensure the stable transmission of data. This switch can be used as a small and medium-sized LAN network.

Excellent performance can help you widely use in wireless, monitoring and other fields.

8 Port 10/100/1000Base-TX with 2 Gigabit SFP Web Managed Switch

Front panel

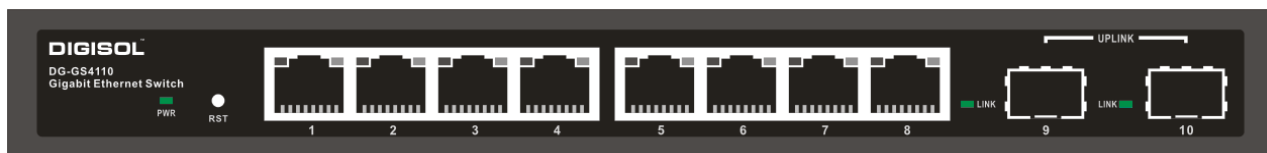

PWR LED : The Power LED lights up when the Switch is connected to a power source.

Link/Act LED: The Link/Act LED flashes which indicate a network link through the corresponding port. Blinking indicates that the Switch is either sending or receiving data to the port.

RST: Pressing the Reset button for 5 seconds the switch will change back to the default Configuration and all changes will be lost.

Real panel



Grounding: use specialized ground lead connect.

Connect the power adapter output terminal to this port. Supports input voltages +44 ~ +57 VDC

2 Hardware installation

This chapter provides unpacking and installation information for the Web Managed Ethernet switch.

First step: open a seal

Open the shipping carton and carefully unpack its contents. Please consult the packing list located in the User Manual to make sure all items are present and not damaged.

- Switch 1pcs
- AC power cord 1pcs
- Rubber feet 4pcs
- Screws 6pcs
- Mounting brackets 2pcs
- CD 1pcs

If any item is found missing or damaged, please contact the local reseller for replacement.


Second step: switch installation

For safe switch installation and operation, it is recommended that you:

- Visually inspect the power cord to see that it is secured fully to the AC power connector.
- Make sure that there is proper heat dissipation and adequate ventilation around the switch.
- Do not place heavy objects on the switch.

Desktop or Shelf Installation

When installing the switch on a desktop or shelf, the rubber feet included with the device must be attached on the bottom at each corner of the device's base. Allow enough ventilation space between the device and the objects around it.

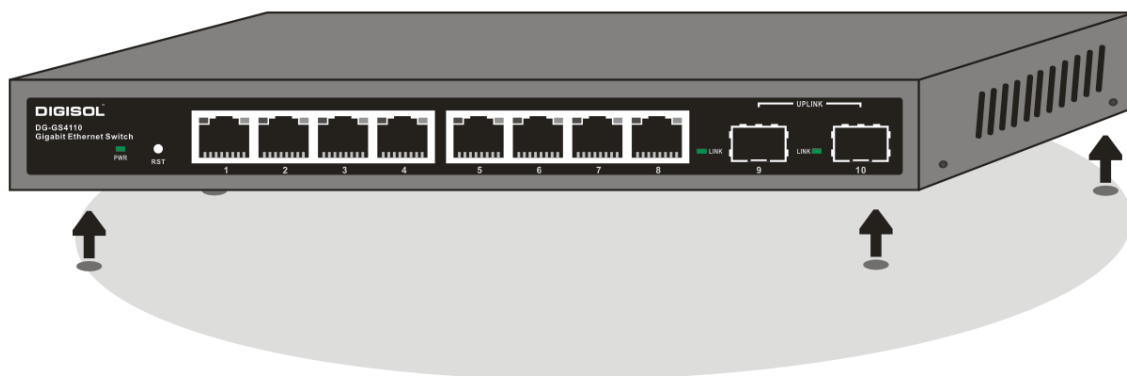


Rack Installation


Attach the mounting brackets to the switch's side panels (one on each side) and secure them with the screws provided (please note that these brackets are not designed for palm size switches).



Third step: Plugging in the AC Power Cord

Using the AC power cord to connect to the power adapter, and then plug the output terminal of the adapter into the DC IN socket on the back of the switch. (The AC power outlet should be grounded)

	Warning: Do not turn on the power switch before power cables are connected. Power surge may cause damage to the Switch.
---	--

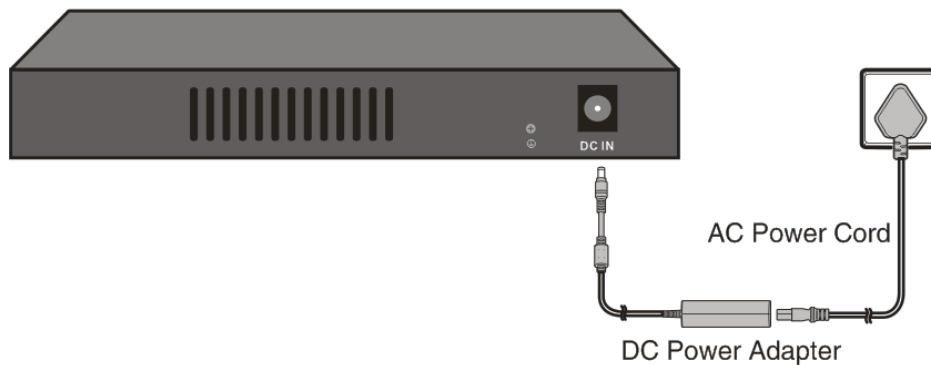

Power failure

As a precaution, the switch should be unplugged in case of power failure. When power is resumed, plug the switch back in.

3 Getting Started

This chapter introduces the management interface of Web Managed Ethernet switch.

Management Option

The Web Managed Ethernet switch can be managed through any port on the device by using the Web-based management.

Each switch must be assigned its own IP address, which is used for communication with Web-Based Management or a SNMP network manager. The PC should have an IP address in the same range as the switch.

Please refer to the following installation instructions for the Web-based Management.

Using Web-based Management

After a successful physical installation, you can configure the switch, monitor the network status, and display statistics using a web browser.

Supported Web Browsers

The embedded Web-based Management currently supports the following web browsers:


- Internet Explorer 6 or higher version
- Netscape 8 or higher version
- Mozilla
- Firefox 1.5/2.0 or higher version

Connecting to the Switch

You will need the following equipment to begin the web configuration of your device:

1. A PC with a RJ-45 Ethernet connection
2. A standard Ethernet cable

Connect the Ethernet cable to any of the ports on the front panel of the switch and to the Ethernet port on the PC.

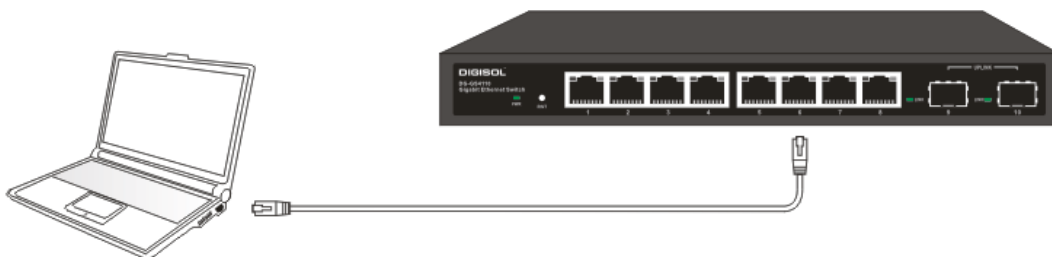

Login Web-based Management

In order to login and configure the switch via an Ethernet connection, the PC must have an IP address in the same subnet as the switch. For example, if the switch has an IP address of **192.168.0.1**, the PC should have an IP address of **192.168.0.x** (where x is a number between 2 ~ 254), and a subnet mask of **255.255.255.0**.

Open the web browser and enter 192.168.0.1 (the factory-default IP address) in the address bar. Then press <Enter>.




Enter the IP address in the web browser



NOTE: The switch's factory default IP address is 192.168.0.1 with a subnet mask of 255.255.255.0

To log in to the switch, the IP address of your PC should be set in the same subnet as that of the switch. The IP address is 192.168.0.x ("x" is any number from 2 to 254). Subnet Mask is 255.255.255.0.

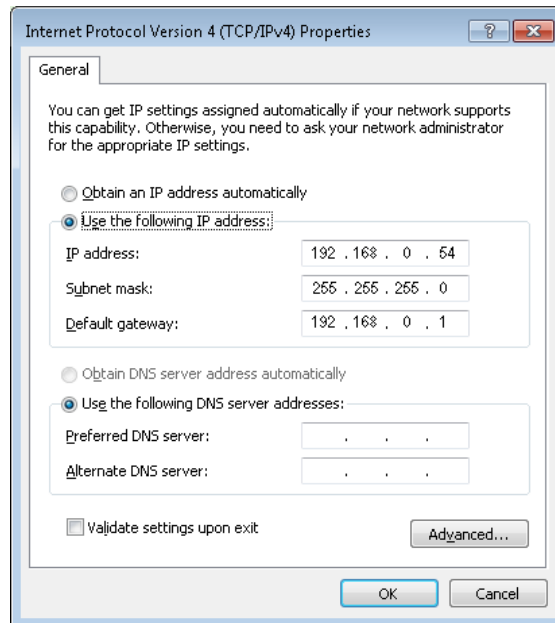

When the following logon dialog box appears, enter the password then click **OK**.
By default, the username is **admin** and the password is **admin**.



Logon Dialog Box

1. WEB page elements

Shown in Figure 2, WEB page is mainly composed of three parts: title page, navigation tree page and main page

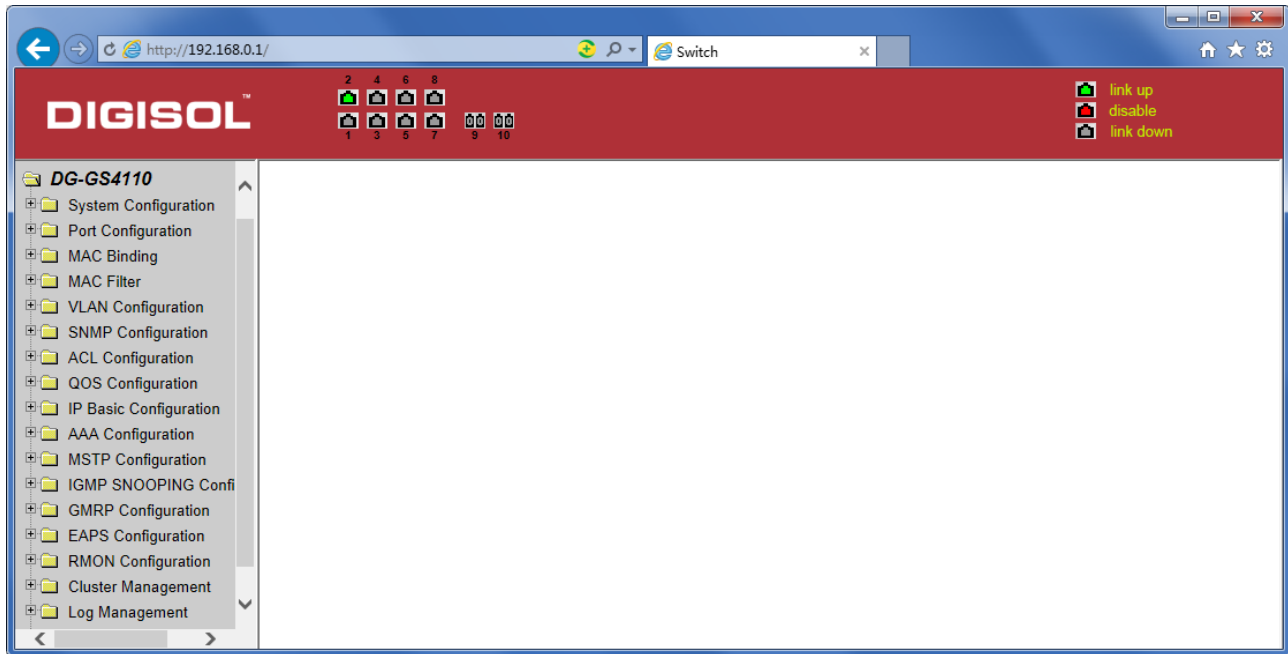


Figure 2

Title page is used to display the logo

Main page is used to display the user from the navigation tree, select the page

2. The structure of Navigation tree

Figure 3 shows the navigation tree organizational structure.

Navigation tree is located in the lower left of each page, using the tree display nodes of the WEB page, users can easily find the page you want to manage the WEB. According to a different web page functionality can be divided into different groups, each including one or more pages. Most of the navigation tree in the name of the corresponding web page top of page title abbreviation.

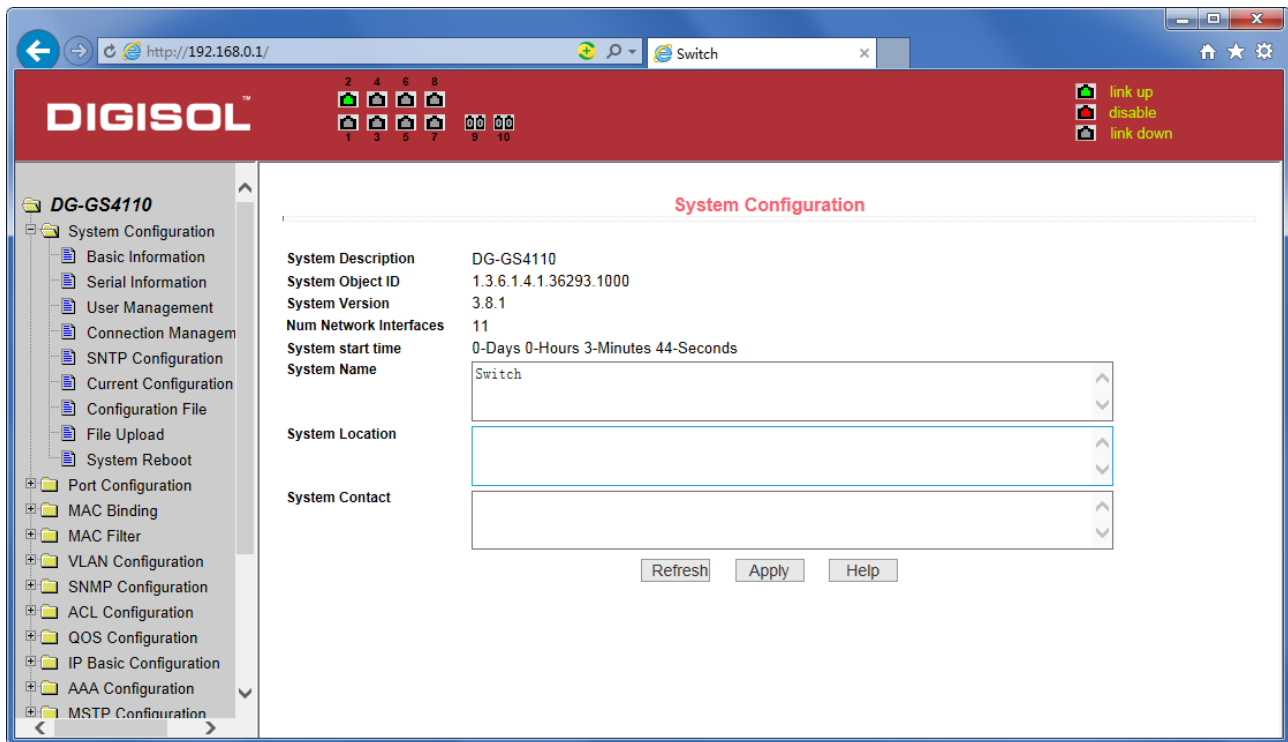


Figure 3

3. Page button Introduction

On the pages, here is Some commonly used button, the role of these buttons are generally the same, Form 2 on the role of these buttons are described:

Form 2 :

button	effect
Refresh	Update all fields on the page
Apply	Numerical value will be updated into the memory. Because the error-checking should be implement by the Web Server, before the user selects the button will be no error checking.
Delete	Delete the current record
Help	Open help pages, view the individual pages of the configuration instructions

4. Error messages

If the switch WEB server error occurred while processing user requests, it will display a dialog box in the corresponding error message. For example, Figure 4 shows an error message dialog box.

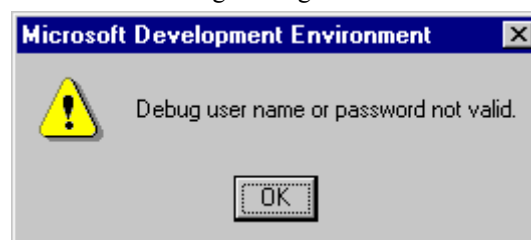


Figure 4

5. Entry Field

Some pages of the most left column in the table has an entry field, as shown in Figure 5, through the field can access different rows in the table. When you choose a line for the field, which lines the corresponding information is displayed in the first line, then only the line can be edited, the line also known as the activities line. A time when it was first loaded, it shows the field new, activity line is empty.

If want to add a new line , should select new from the drop-down menu of entry field , enter the new line's information, and then press apply button.

If you want to edit the line already exists, it is necessary select the appropriate line number of the drop-down menu, according to need to edit the line, and then press the apply button, you will see a corresponding change in the table displayed.

If you want to delete a row, select the line number accordingly from entry field's drop-down menu, then press the delete key, this line will disappear from the table.

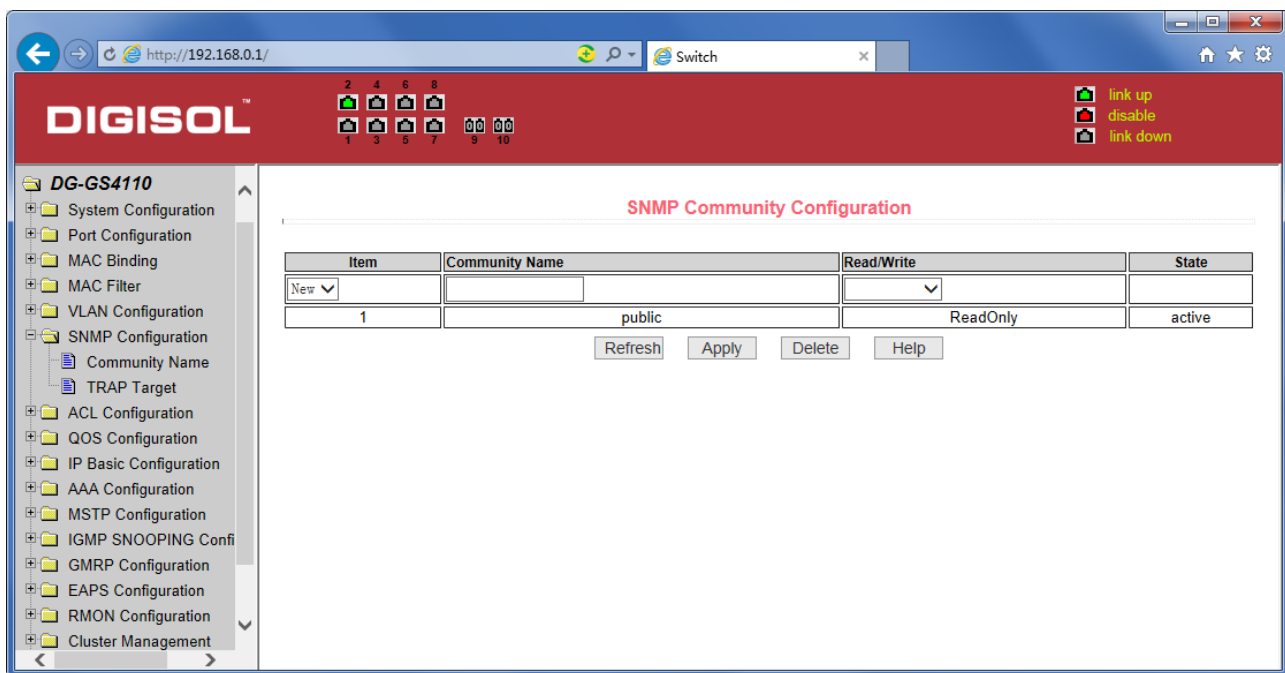


Figure 5

6. Status Field

Some pages of the most right column in the table there is a state field, as shown in Figure 6, the field displays the line status. Since all row state changes are processed in-house, so the status field is read-only. Once the line information of the entry filed into force, the line will automatically become the active state the status active.

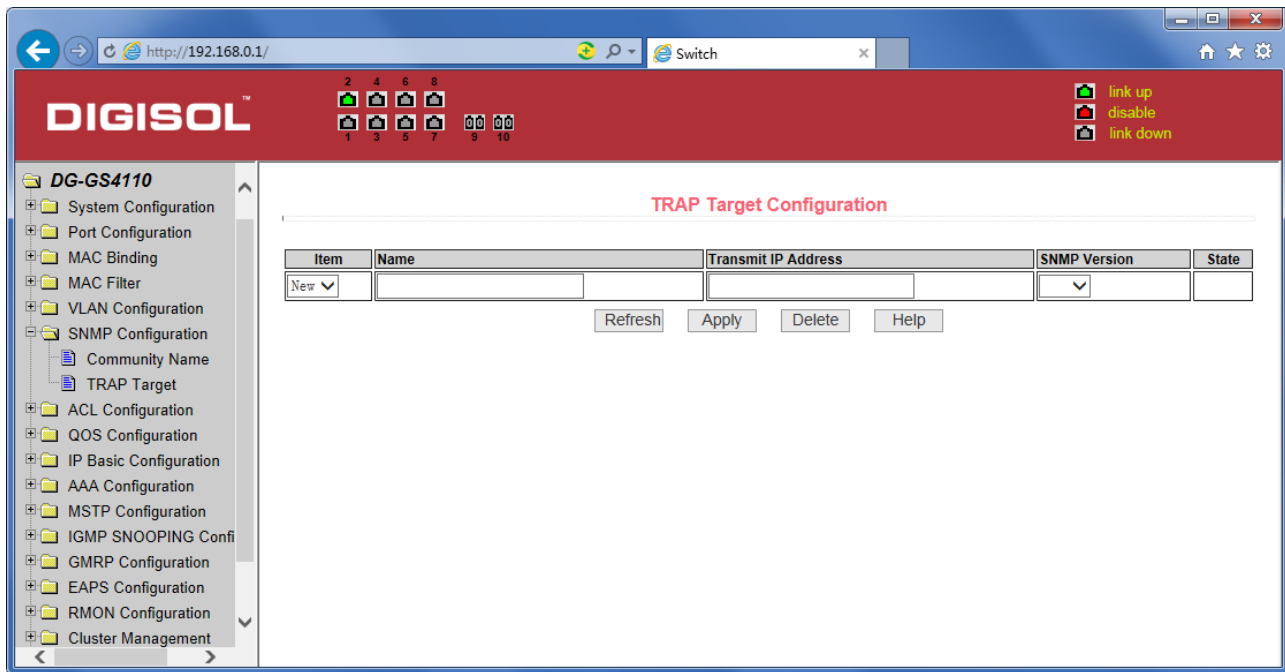


Figure 6 the web page of status field

Figure 7 shows the login dialog box, the logon dialog box will be displayed while the user login the web page at the first time. When The user filled out the correct user name and password, then click the Enter button can log on to the switch Web server. Passwords are case-sensitive, the anonymous user password can be maximum set up to 16 characters, while the multi-user name and password can be set up to 11 characters. Switch switch default user name is the anonymous user name admin, default password for the anonymous user's password, The default username is admin and password is admin.

1. System Configuration:

(1) Basic information page

Figure 9 is the basic information of configuration page, users can configure the basic information for the switch.

System Description display the description of the relevant parameters of system.

System descriptor ID display system in the network identity management.

The system version number is displayed the current software version number of switches.

The number of switches interface displays the current number of interfaces in the switch.

The system start-up time display switches from start to the present time.

The system name as the switch's system name in the network, the user can modify the system name.

The systematic location as the switch's physical location showing at the network, the user can modify the system locations.

system Contact show the contacts person and details of the current node, the user can modify the system contact.

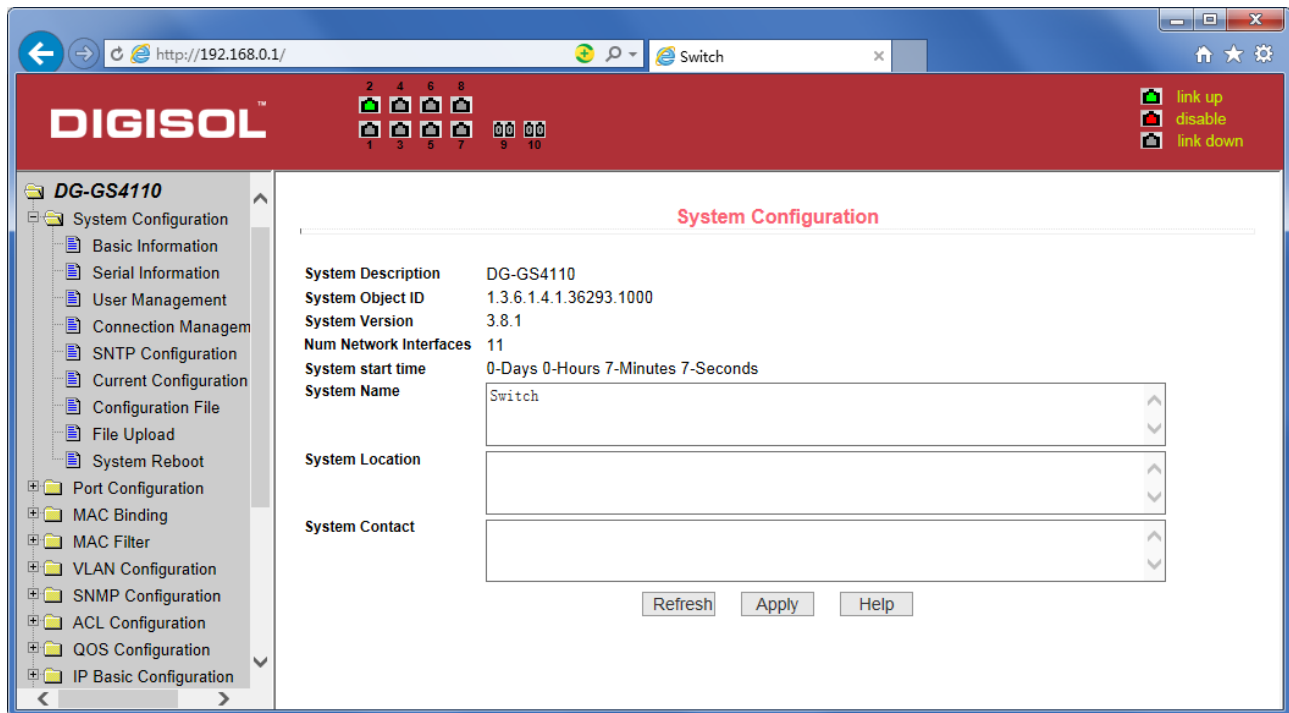


Figure9 Basic information Page

(2) Serial port information page

Figure 10 is a serial port configuration page, the page displays serial baud rate and other related information. When the host through the serial port terminals (such as Windows, HyperTerminal) to the management of switches, serial console on the COM port configuration must be consistent with this page information.

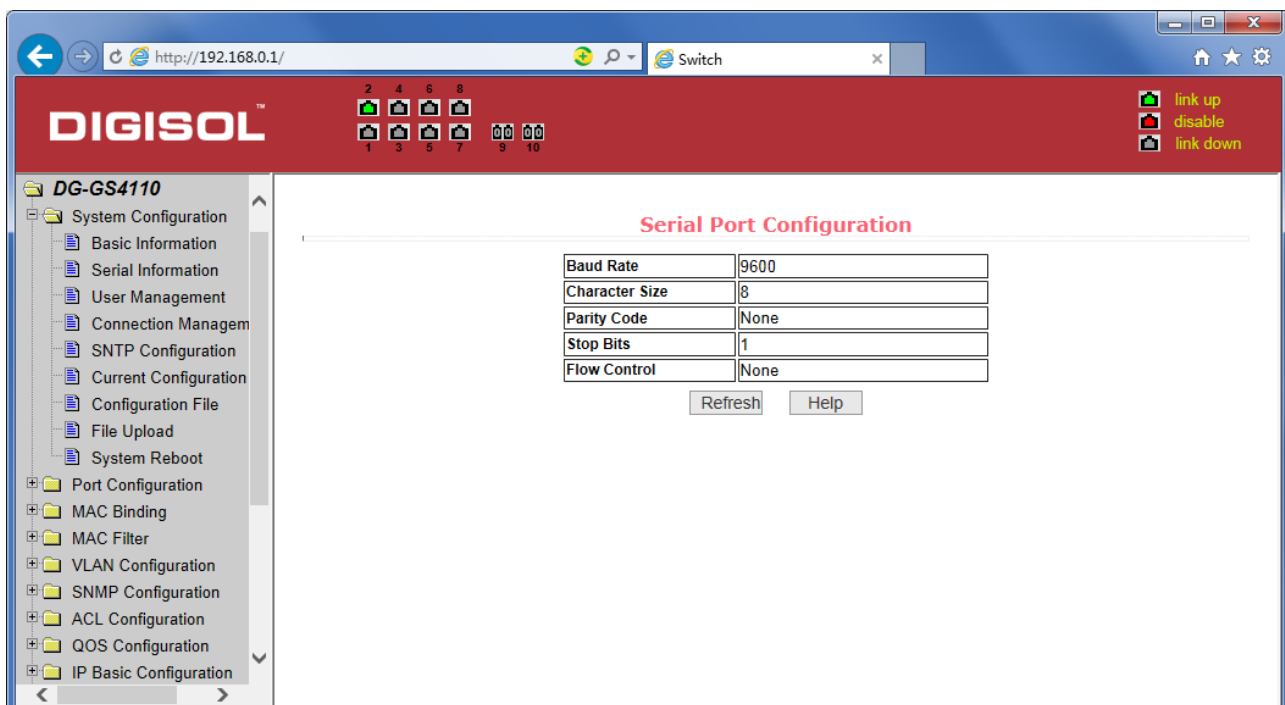


Figure 10 Serial port information page

⌚ sales@digisol.com

(3) User management page

Figure 11 is a user management page, the user can modify this switch anonymous user (admin) password, Telnet and the Web without opening a multi-user, they all use the same anonymous user's password. Passwords are case-sensitive, and can be up to 16 characters. If you want to change your password, the user need to enter the new password twice, once the user clicks the application button, the new password is activated, then if the switch is not enabled multi-user, will display the login dialog box (as shown in Figure 7), require the user to re - login the web page, with a new anonymous user password.

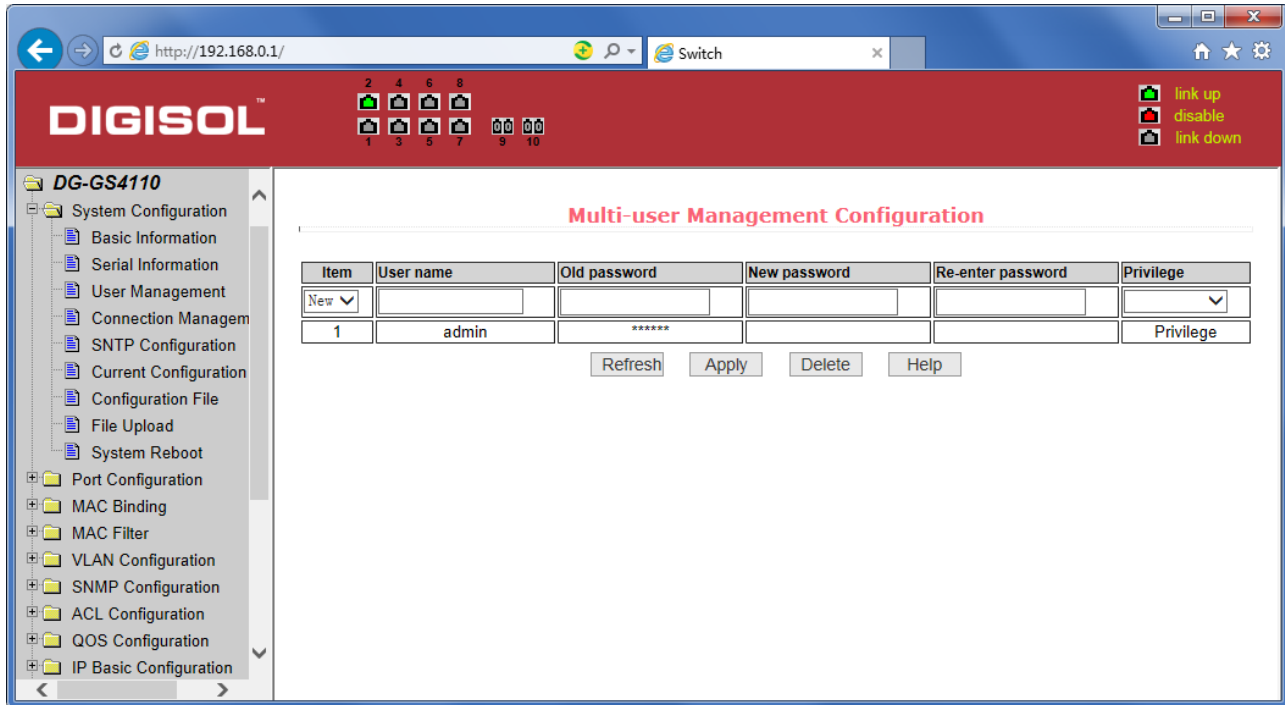


Figure 11 user's management page

(4) Security Management Page

Figure 12 is **Security** management configuration page, through the page's configuration, the administrator can control network management services TELNET, WEB and SNMP, you can open (enable) or off (disable) these services, these services can be mounted up with standards IP ACL group, and the implementation of the source IP address control, control access to the host of these services

When the Switch default, TELNET, WEB and SNMP services are open and no ACL filtering, that is, all hosts have access to the switch of these three services. If the administrator for safety, do not want to provide one or several services, which can shut down one or several services. If the administrator only hope that the specified host could access one or several services, can do the ACL filtering for one or several services. As a service to do ACL filtering, you need to open the service, and to select an IP standard ACL group (1-99), the primary factor it's the ACL group must be present.

Note that, if the administrator on this page control the WEB services (such as closing WEB Services) may cause users to no longer use the WEB page, then you can log switches by other means and to control the use of WEB service allows users to WEB page (such as the Open the WEB service).

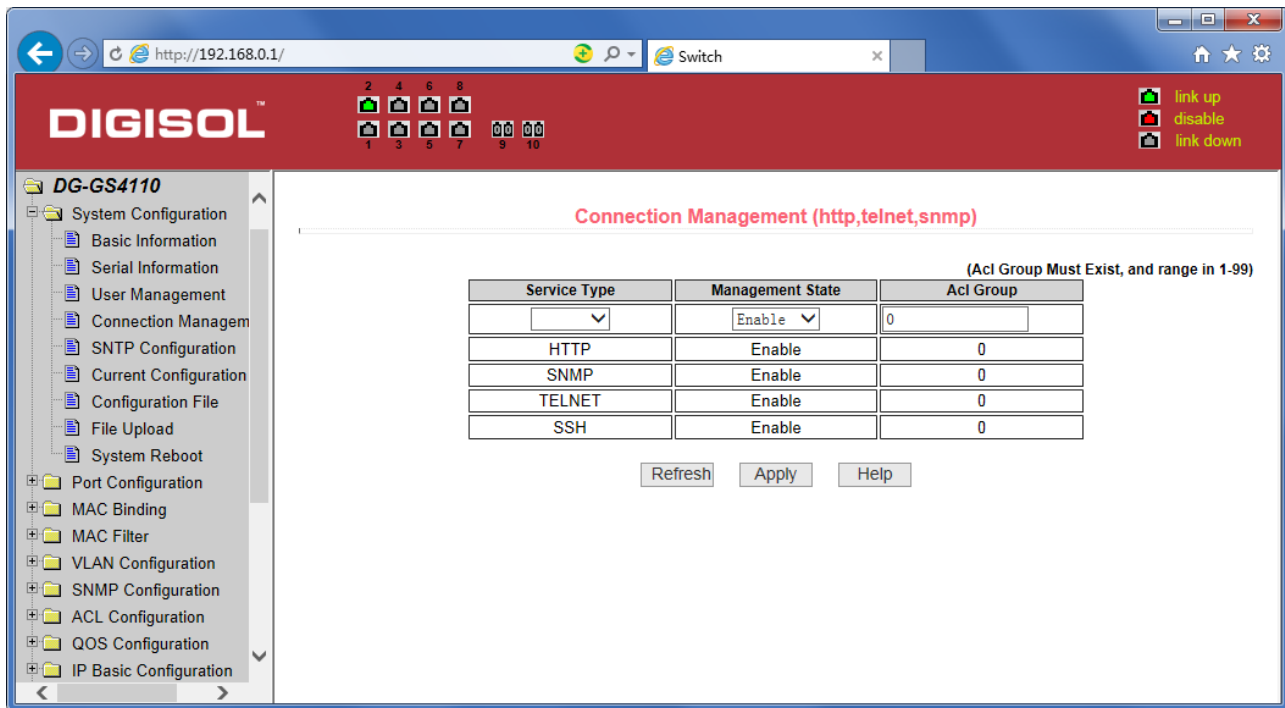


Figure 12 Security management page

(5) Configure the current page

Figure 13 is the current configuration page. the user can view the current configuration of the switch on this page. Save key is to store the current system configuration in the configuration file. Because the storage operation requires erase& write FLASH chips, which take up some time. When the user was configured on the page and hope to restart the switch from using these configurations are not lost, you must exit the page before the current configuration page, click the Save button.

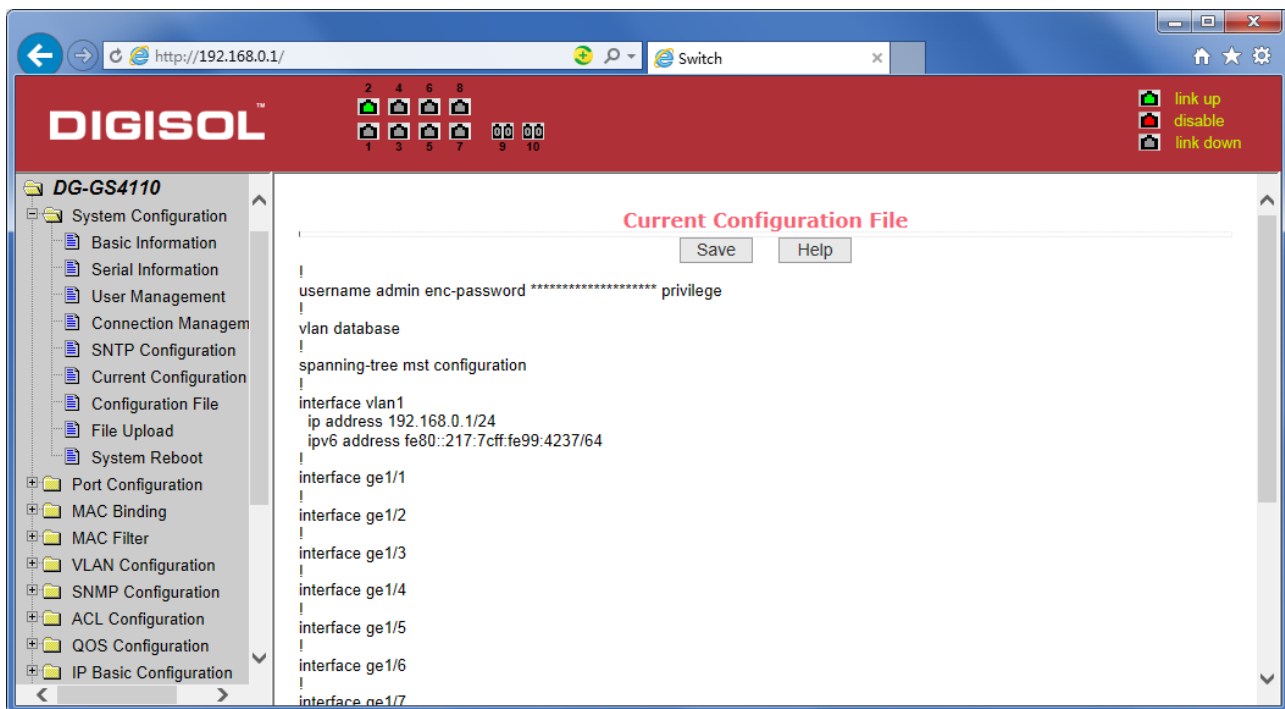


Figure 13 the current configuration page

(6) Configuration page

Figure 14 is profile configuration page. This page allows users to view the system's initial configuration. The initial configuration is actually the configuration file in the FLASH, when the configuration file does not exist in FLASH, the system starts using the default configuration. Delete key to delete the configuration file in the FLASH. Click the Delete button, will pop up a dialog box ,that will prompts the user sure to delete the configuration file or not, according to the dialog box to determine if it's ok, otherwise click Cancel button. Download button is used to downloaded a configuration file to the PC. Click to download button, will pop up a dialog box, users select Save and save the configuration file directory path. Download the configuration file names are as switch.cfg.

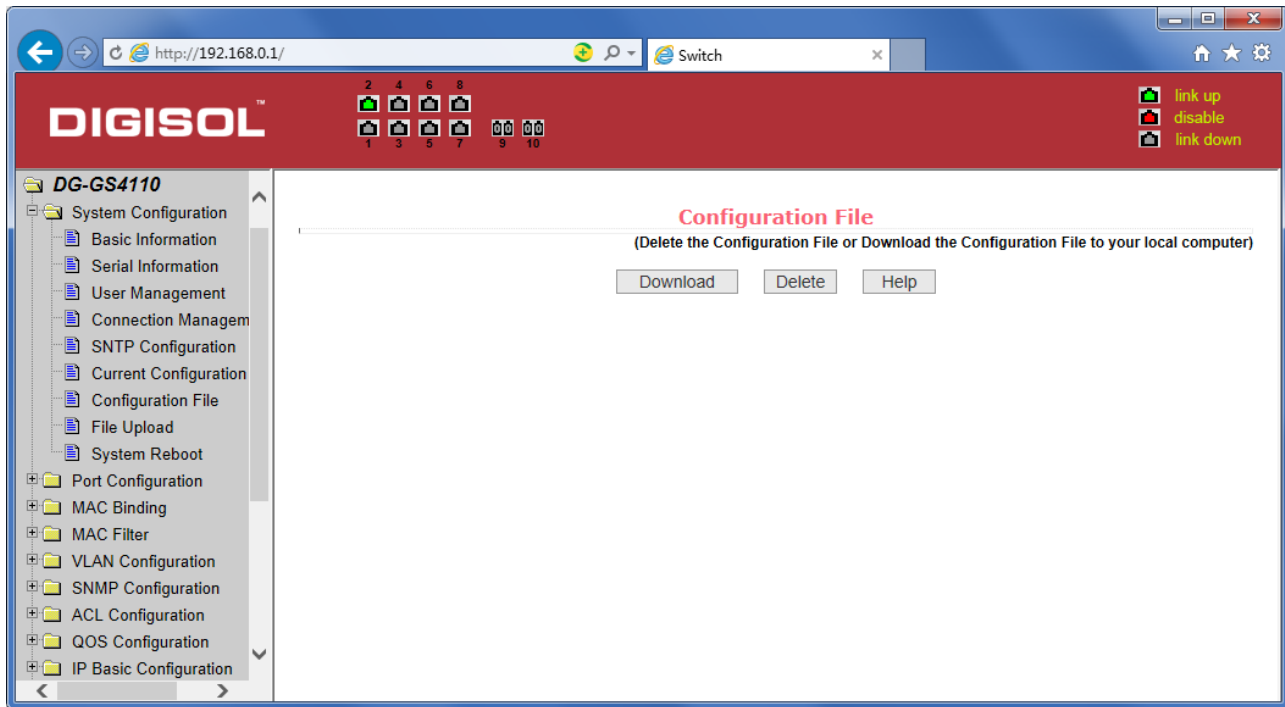


Figure14 Configuration file page

(7) File upload page

Figure 15 is a file upload page, through this page a user can upload a configuration file and mapping files to the switch. Click the Browse button to select the upload configuration file or image file in the directory path on the PC. Click Upload button upload a configuration file or image file, configuration file extension must be *.cfg, image file must be provided by the manufacturer and the file name extension must be *.img. Transmission before the return of the results page, please do not click on other pages, or restart the switch; otherwise, the file transfer will lead to failure caused by system crashes.

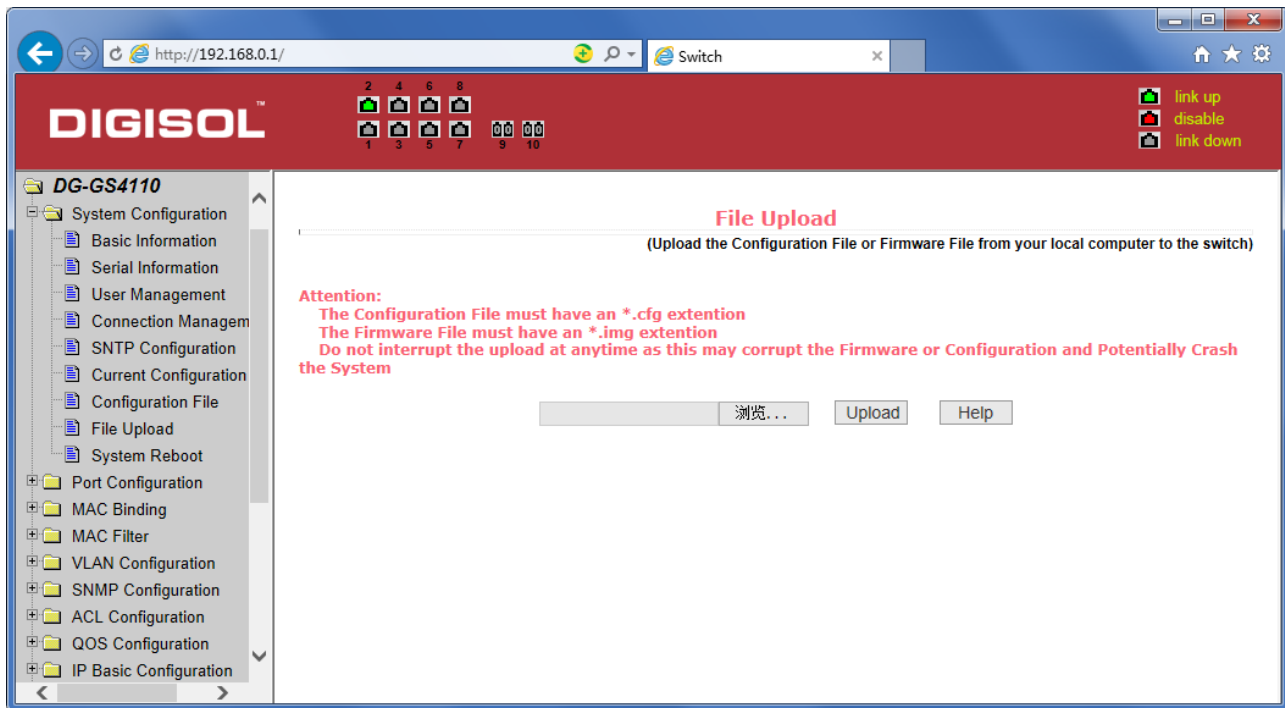


Figure 15 File Upload Page

(8) System reset page

Figure 16 is system reset page, through this page users to restart the switch. When you click on Restart button, will pop up a dialog box that prompts the user to determine whether or restart the switch, If it is determined according to OK button, otherwise click Cancel button. Restart will no longer open the Web page.

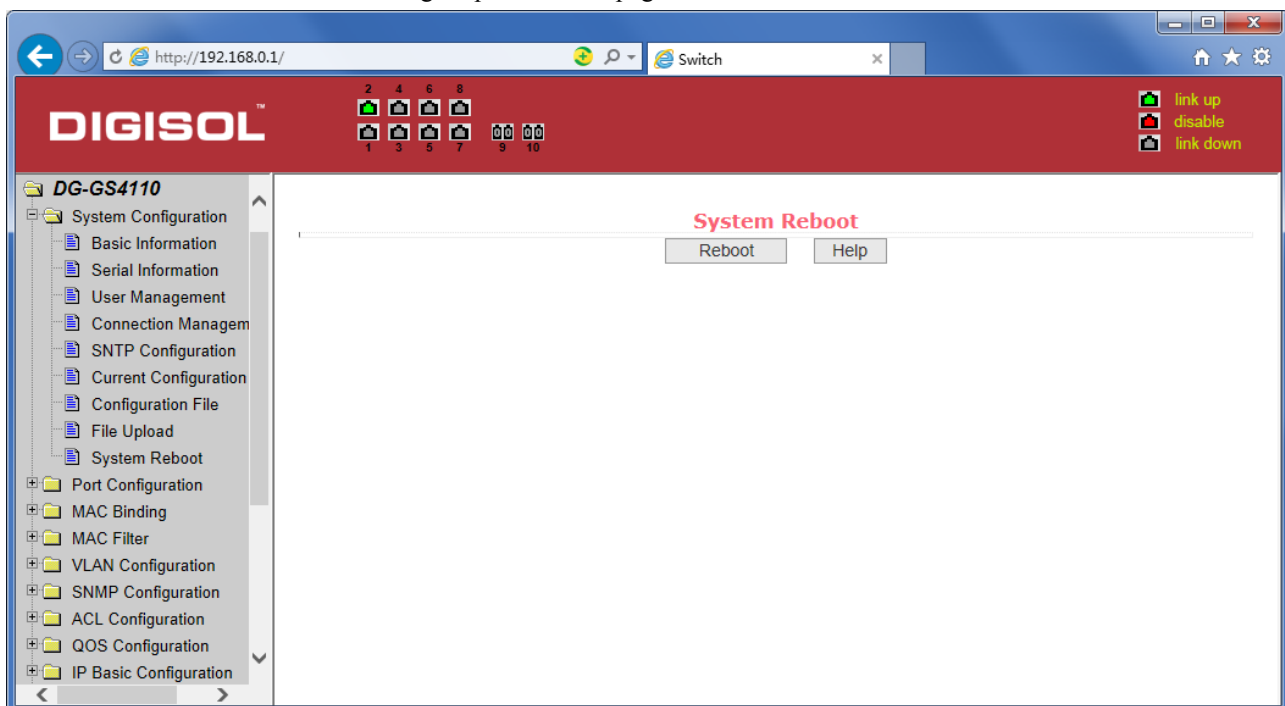


Figure16 System reset page

2. Port Configuration

(1) Port configuration / port -display page

Figure 17 is the port configuration / port -display page. Users can enable or disable the port to the page, set the port speed, or View all ports of the basic information.

To set a specific port, users need to select the appropriate port name on port drop-down menu,. The default port status is up, can select the drop-down menu -down to disable the port. Users can also choose to set the speed of the drop-down menu to set the speed of the port, such as the mandatory half-duplex port 10M (half-10) and so on. On this page the user can view all ports other basic information.


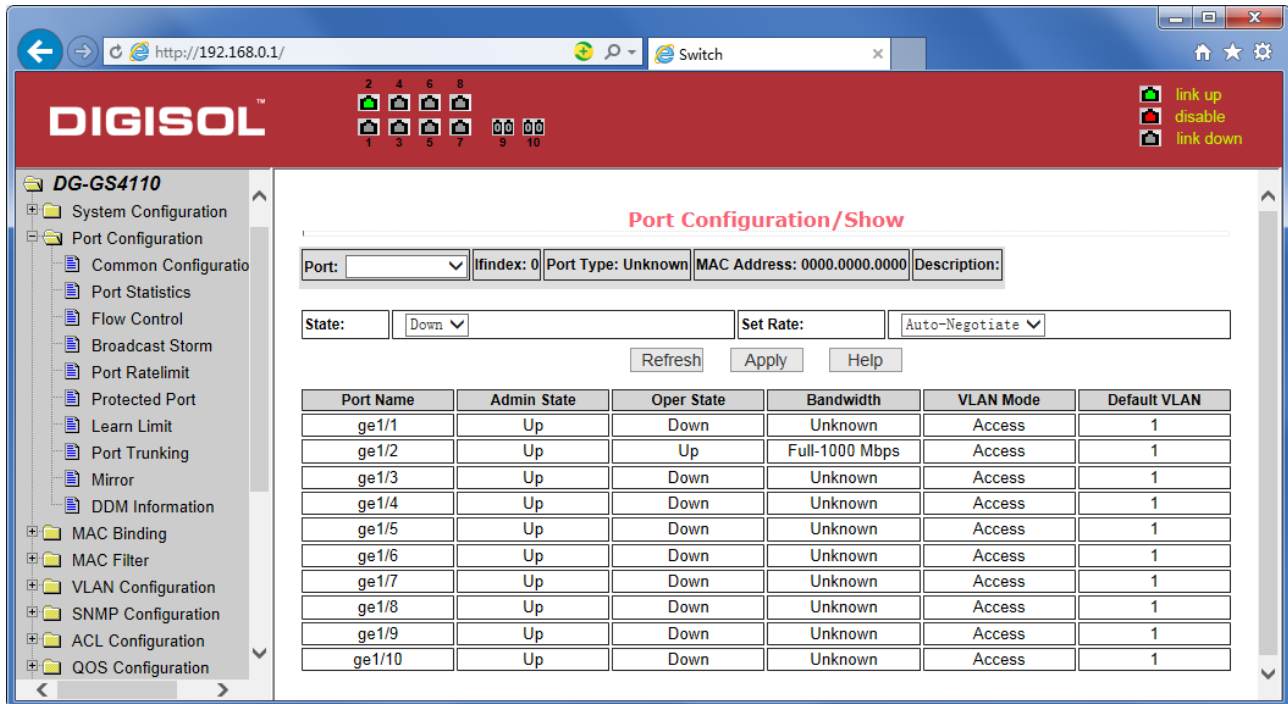


Figure 17 port configuration and port - display page

(2) Port Statistics Page

Figure 18 is the port statistics information page. To view a particular port, users need to select the appropriate port name in the port drop-down menu. Users can view the statistics information of send and receive packets on this page.

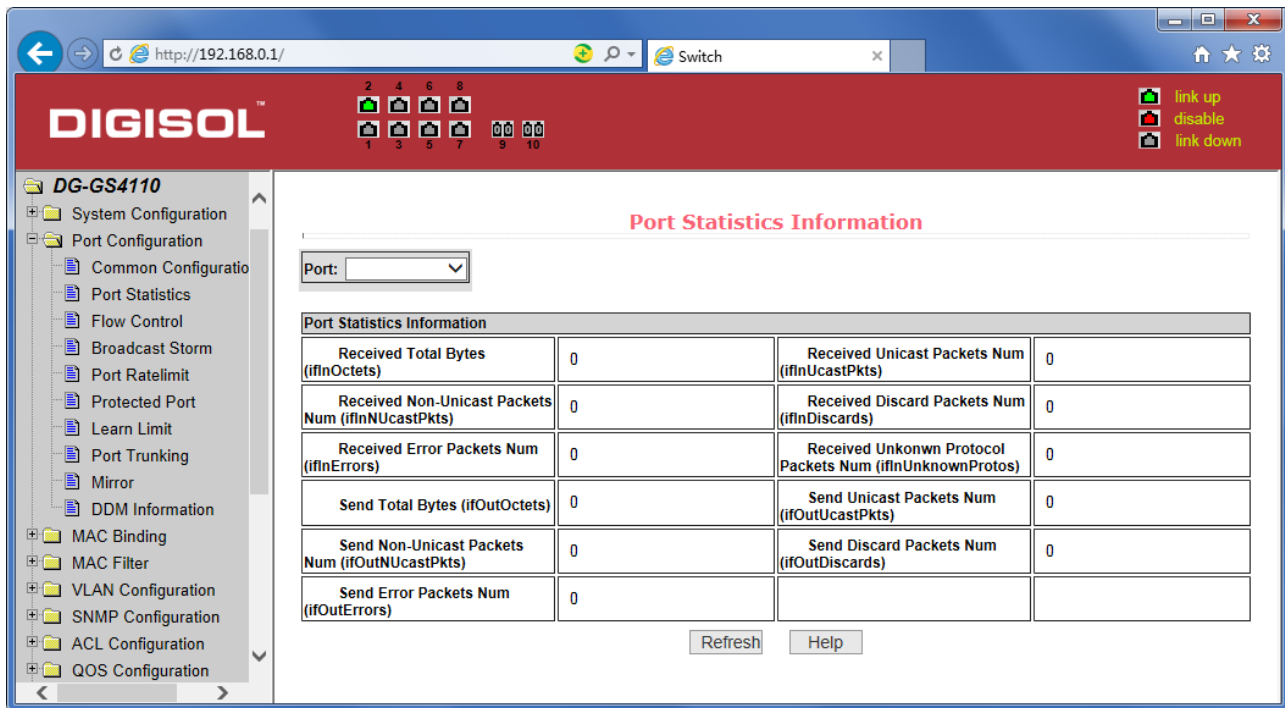

Figure

18 Port Statistics Page

(3) Flow control page

Figure 19 is the flow control page. Users can enable and disable each port's send and receive flow control through this page.

Flow control by sending the side of the drop-down on or off to open or close the sending side of flow control, flow control through the receiving side of the drop-down on or off to open or close the receiver-side flow control, while on and off also shows the port to send side and receiving-side flow control is turned on or off.


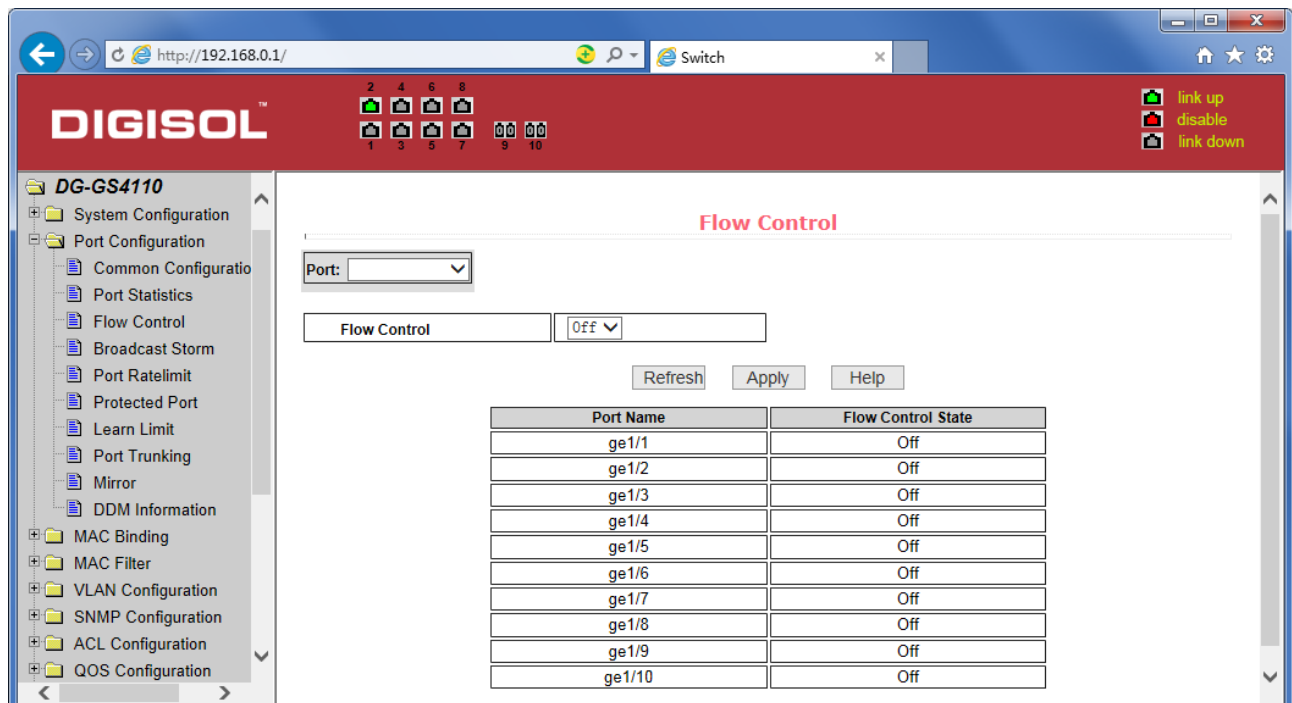


Figure 19 Flow control page

(4) Broadcast storm control page

Figure 20 is the Broadcast Storm Control page. This page is used to do the suppression for configure port broadcast packets, multicast packets and DLF packet.

From the Port drop-down bar select to configure ports. Through the on and off key to open and close the port broadcast suppression, multicast, DLF inhibition and suppression. Inhibition rate is used to configure the port inhibition speed, range 1-1024000, unit kbps. The inhibition rate of the same port broadcast suppression, multicast and DLF inhibition is the same.

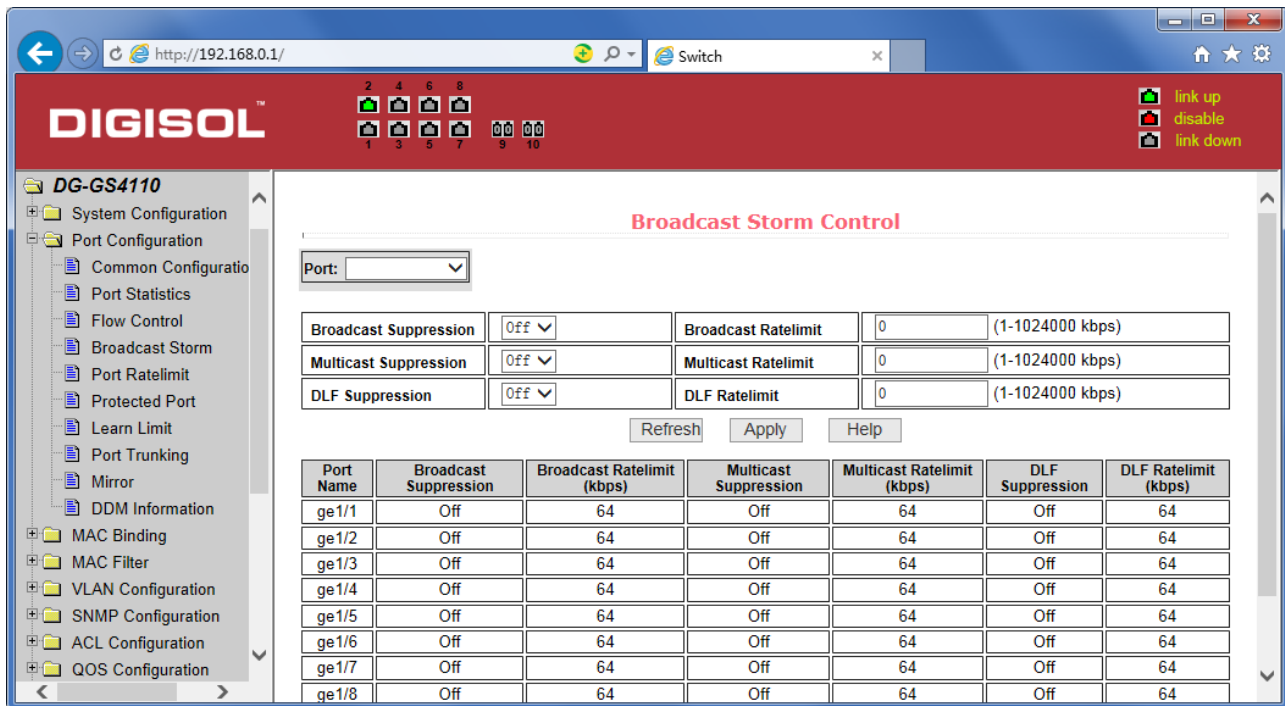

Port Name	Broadcast Suppression	Broadcast Ratelimit (kbps)	Multicast Suppression	Multicast Ratelimit (kbps)	DLF Suppression	DLF Ratelimit (kbps)
ge1/1	Off	64	Off	64	Off	64
ge1/2	Off	64	Off	64	Off	64
ge1/3	Off	64	Off	64	Off	64
ge1/4	Off	64	Off	64	Off	64
ge1/5	Off	64	Off	64	Off	64
ge1/6	Off	64	Off	64	Off	64
ge1/7	Off	64	Off	64	Off	64
ge1/8	Off	64	Off	64	Off	64

Figure 20 Broadcast Storm control Page

(5) Port speed limits page

Figure 21 is the port speed- limit page. This page is used to configure the port 'send and receive rate

From the Port drop-down bar select the configure ports. Bandwidth control of the send data packets is used to configure and display the bandwidth control it , the range is 1-1024000, unit kbps, enter into force after the key press applications. If the port is not configured bandwidth control, shown as off. Cancel button is used to cancel the corresponding data packet to send bandwidth control. Receiving data packets is used to configure and display the bandwidth control of receive data packets control ,the range is 1-1024000, unit kbps, enter into force after the key press applications. If the port is not configured bandwidth control, shown as off. Cancel button is used to cancel the corresponding receiving data packets bandwidth control

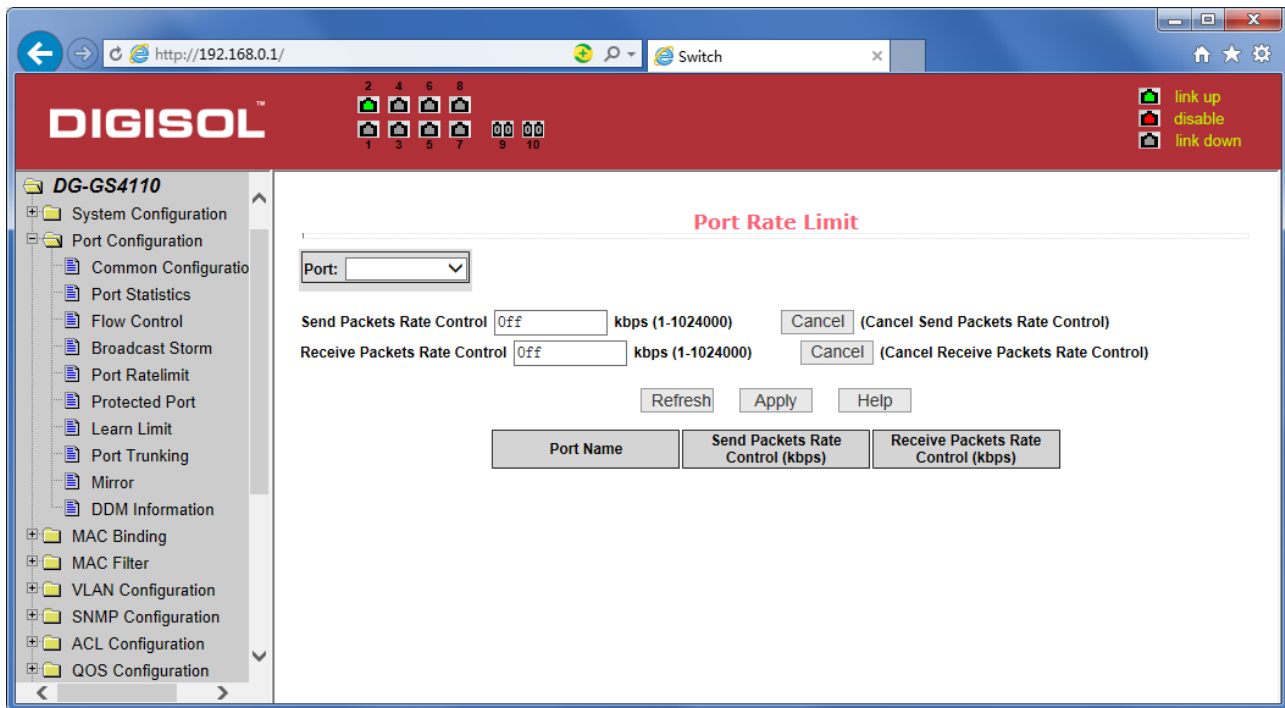


Figure 21 Port speed limit page

(6) Port protection page

Figure 22 is the Port protection page. This page is used to configure the port for the protection port.

If the port is configured as a protected port, the ports can not exchange the data with each other, protected port only with non-protected port for data exchange.

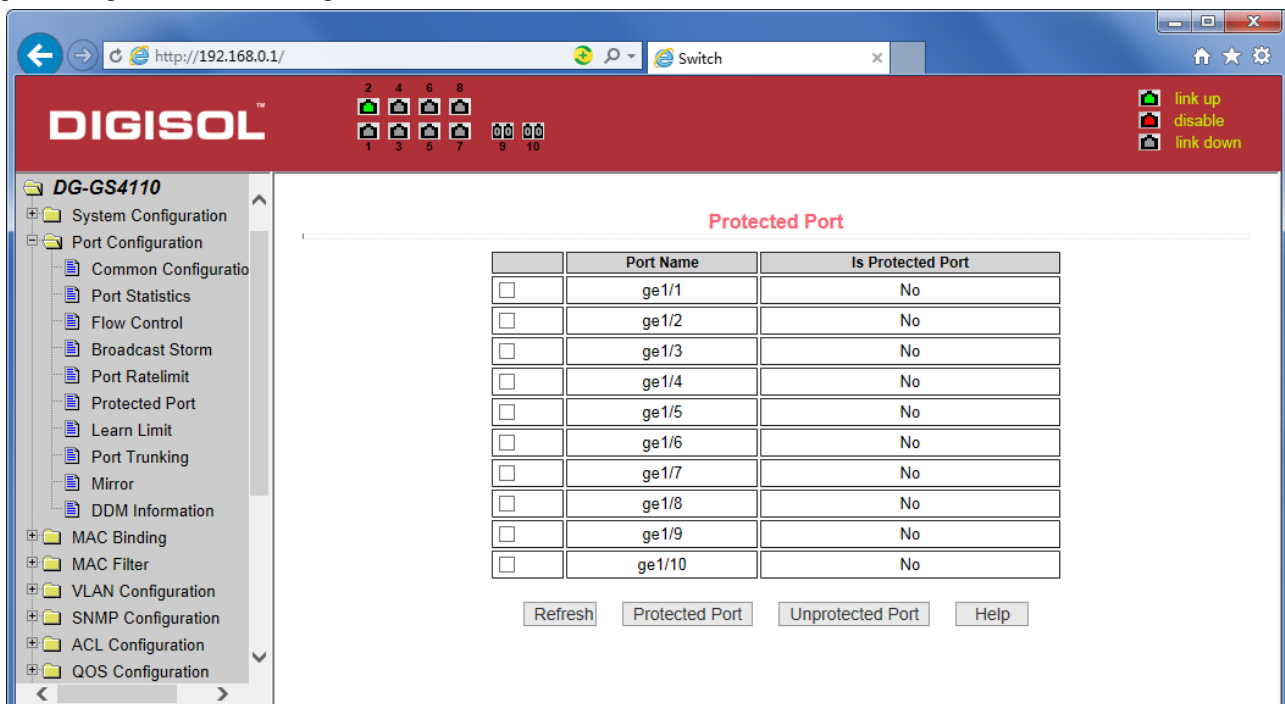


Figure 22 protected port page

(7) Port Learning restrain page

Figure 23 is the port learning restrain page. This page used to restrict the port can learn of the MAC address of the number, range is 0-8191. The default value is 8191, also is the maximum that the port is not configured the learning restrain

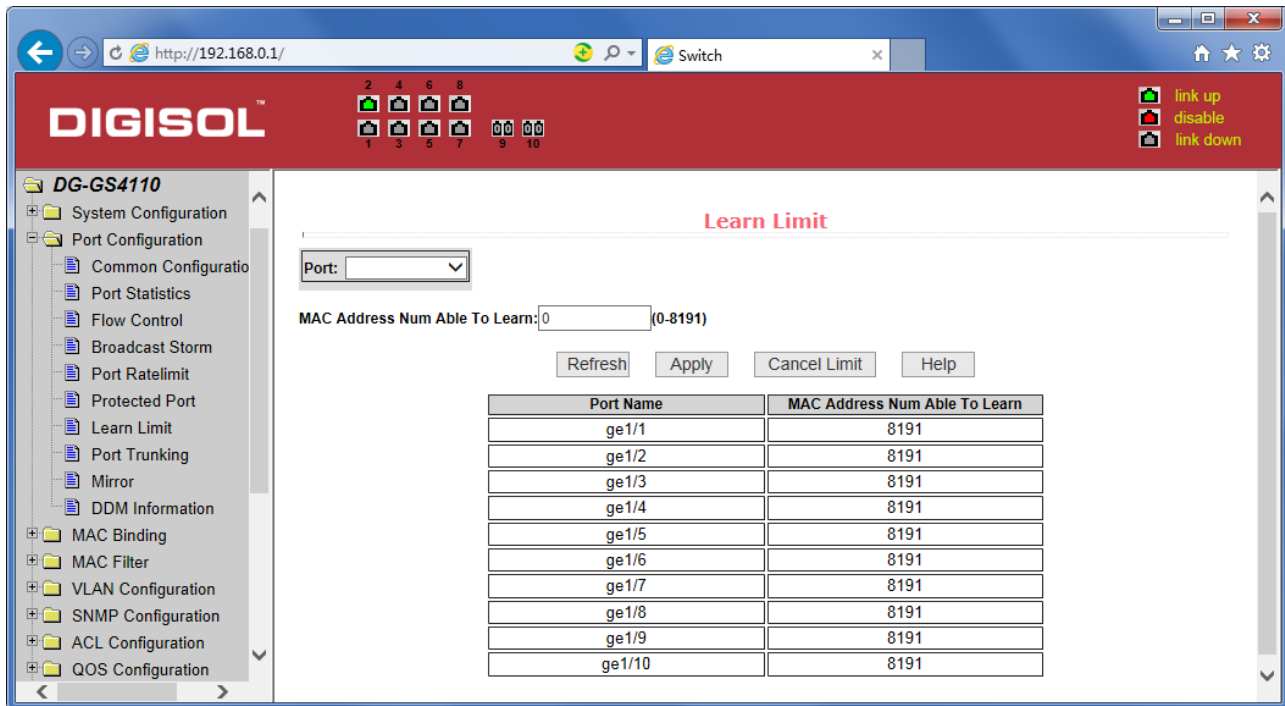


Figure 23 Port Learning restrain page

(8) Port Trunking configuration page

Figure 24 is the port trucking configuration page,. This page allows the user to configure the port trucking. This page consists of four parts: port trucking ID selection, port trucking method selection, configurable ports and group member's port.

To create or modify the port trucking, the user need to select a port trucking ID, port trucking ID from 1 to 3. The user clicks the list box the appropriate port trucking ID, the port trucking of information displayed in the group port. To create a Trunk group, select the appropriate ID in the port trucking ID, click the button "Trunk ID Settings." To set the port trucking method, select one port trucking method, click the button "polymerization Settings." To increase the trucking ports, the port can be configured to select the trucking port in the configurable, click on "members of the port =" "key. Aggregation from the existing port to remove a port group member ports in the trucking port selected, click on "non-member port" = "key. To delete the entire TRUNK group, then click the "Delete trunk group" button.

In page configuring process, at least one Trunk has been established then polymerization settings can take effect; configured Trunking method is also applied to all on the Trunk groups; in that already exist on the Trunk can add or remove Port members ; in the absence of the port members situation can delete a Trunk Group.

Switch provides three kinds of port trucking methods: Based on the source MAC address, based on the purpose MAC address, based on the source and purpose MAC addresses.

Switch maximum support 3 groups port trucking, can be configured to a maximum of three Trunk Group, Trunk1 and Trunk2 can not trucking Gigabit ports, and each group can be aggregated up to the same four attributes port. Trunk3 only be aggregated Gigabit ports, and up to 2 Gigabit ports can be aggregated. Port aggregation method is common to all of the Trunk.

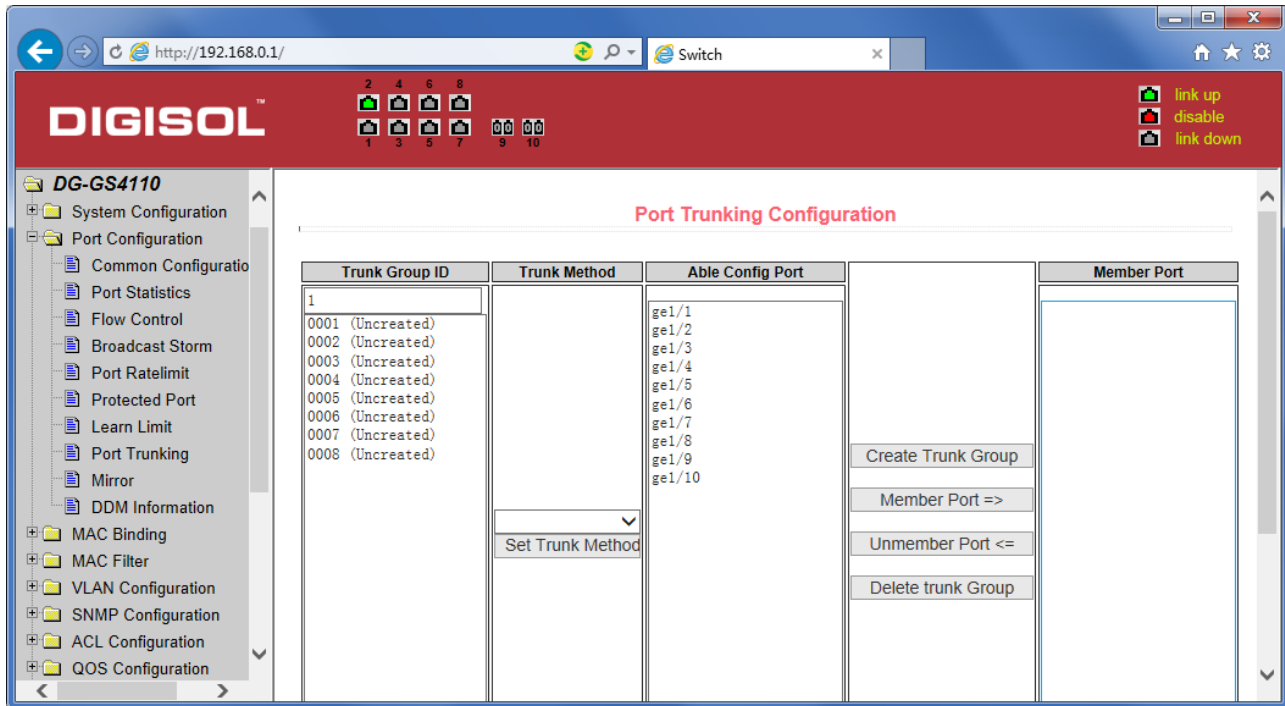


Figure 24 Port Trunking configuration page

(9) Port mirroring configuration page

Figure 25 is the port mirroring configuration page .the page allows users to configure port mirroring. Port mirroring through the mirror port to monitor the data packets of being mirrored output port and the data packets of being mirrored input port.. mirroring Port can only choose one, being mirrored output port and being mirrored input port can select multiple. This page consists of four components: monitor port, configurable port, monitoring direction and mirror configuration information. When you start to configure a mirror port ,firstly configured mirroring port from monitor ports, mirror ports can only have one, and then select the mirror port from the configurable port, select the monitor direction, and press the application key to entry into force, the results is displayed in the mirrored configuration information.

When choose the RECEIVE in direction of monitor, said monitor data packets received, TRANSMIT, said monitor data packets sent, BOTH that monitor all data sent and received packets, NOT_RECEIVE to cancel monitoring received data packets, NOT_TRANSMIT to cancel monitor send data packets, NEITHER cancels monitor data packets received and sent, that is canceling monitor port.

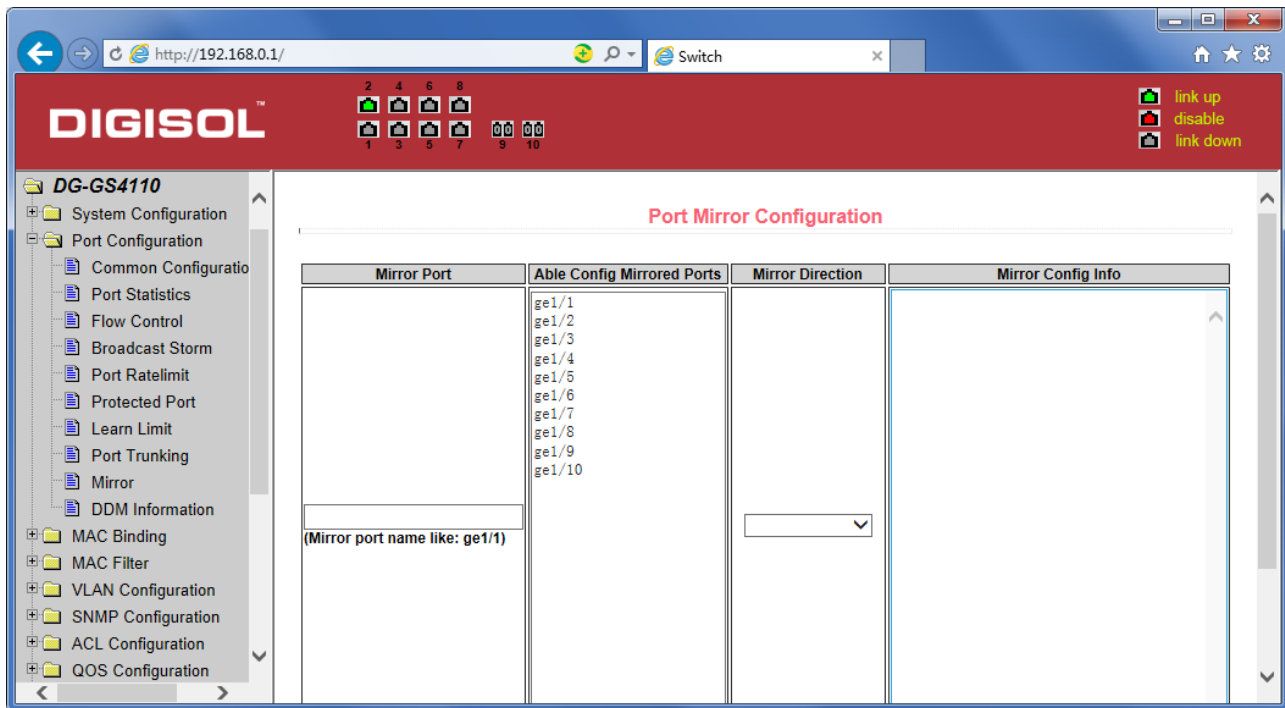


Figure25 Port mirroring configuration page

3. MAC binding

(1) MAC binding configuration page

Figure 26 is the MAC binding configuration page. This page is used to achieve the port and MAC address binding. MAC entries on the page is used to enter the MAC address binding, VLAN ID entry is used to enter the MAC address of VLAN

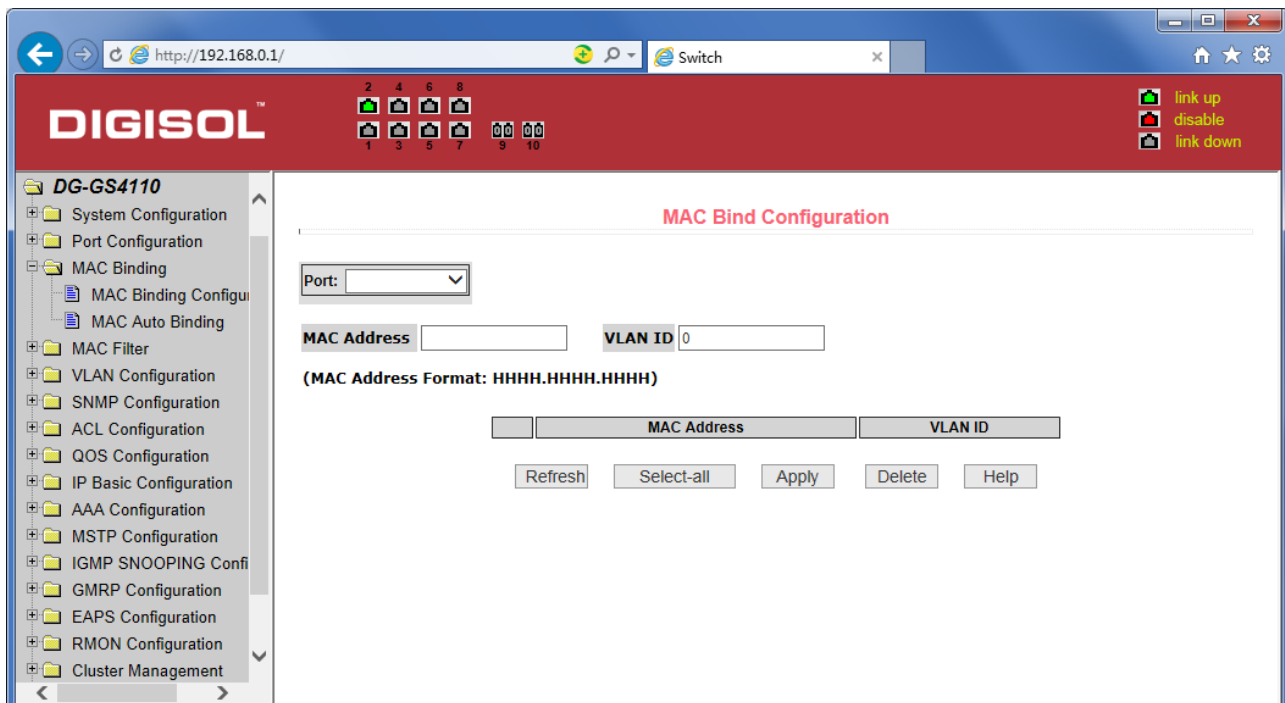


Figure 26 the MAC binding configuration page

(2) MAC binding automatic conversion page

Figure 27 is the MAC binding automatic conversion page. This page is used to achieve the port MAC address auto-binding. Shows the hardware switch on the lay2 the exist port dynamic MAC address and affiliated VLAN. Can choose one of the entry and convert it into static binding.

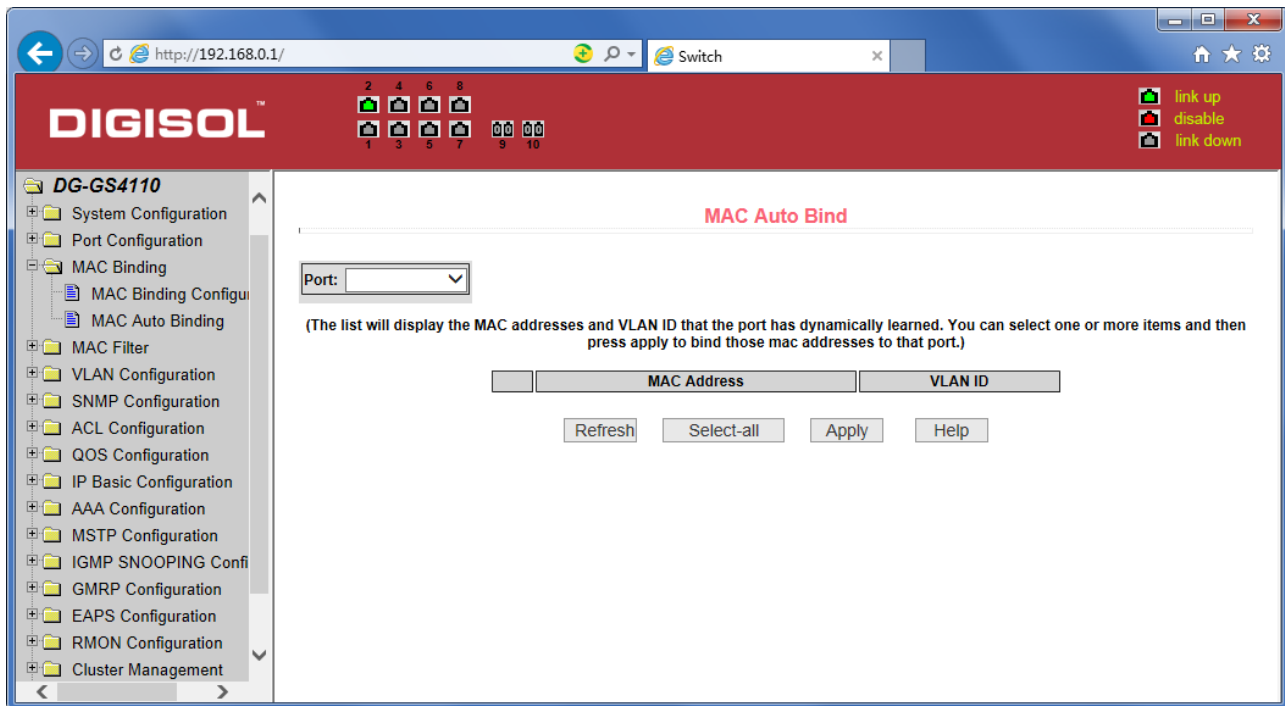


Figure 27 the MAC binding automatic conversion page

4. MAC filtering

(1) MAC filtering configuration page

Figure 28 is the MAC filtering configuration page. This page is used to configure the ports on the MAC address filtering. MAC entries on the page is used to enter the MAC address filtering, VLAN ID entry is used to enter the MAC address affiliated VLAN.

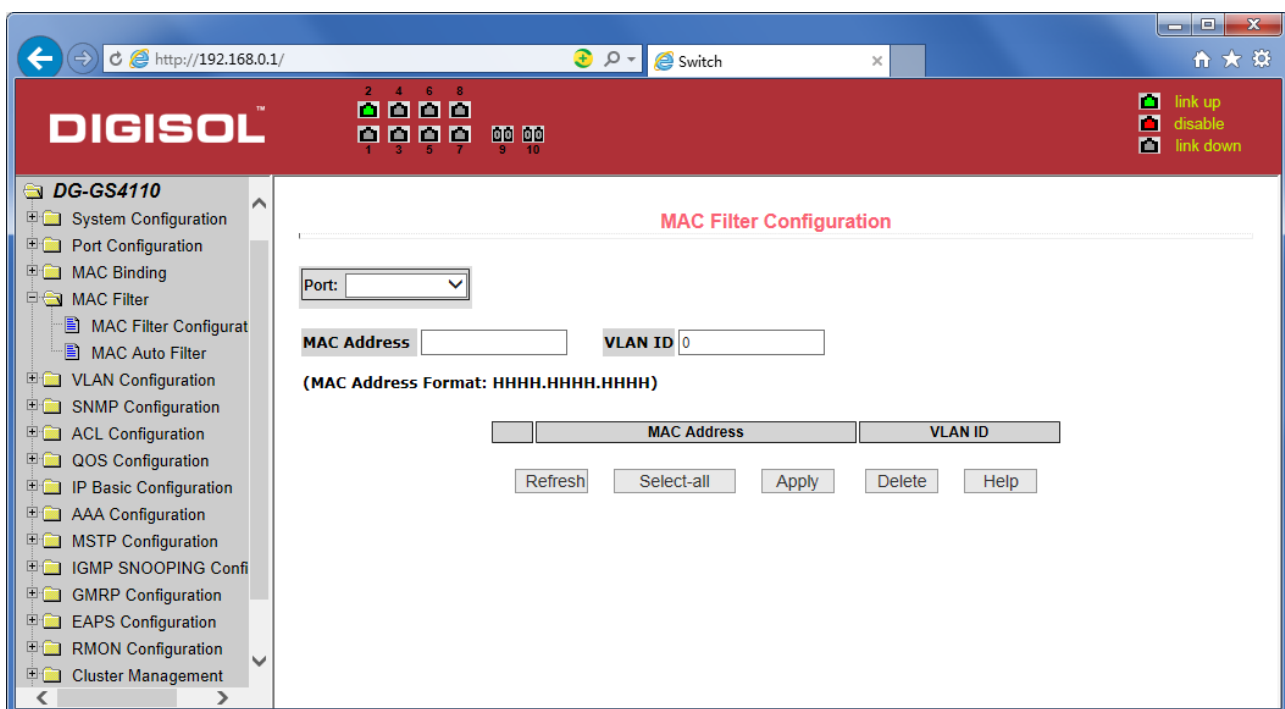


Figure 28 the MAC filtering configuration page

🕒 sales@digisol.com

(2) MAC filtering automatic conversion page

Figure 29 is the MAC filtering automatic conversion page. This page is used to achieve the port MAC address auto-binding. Shows the hardware switch on the lay2 the exist port dynamic MAC address and affiliated VLAN. Can choose one of the entry and convert it into static filtering configuration

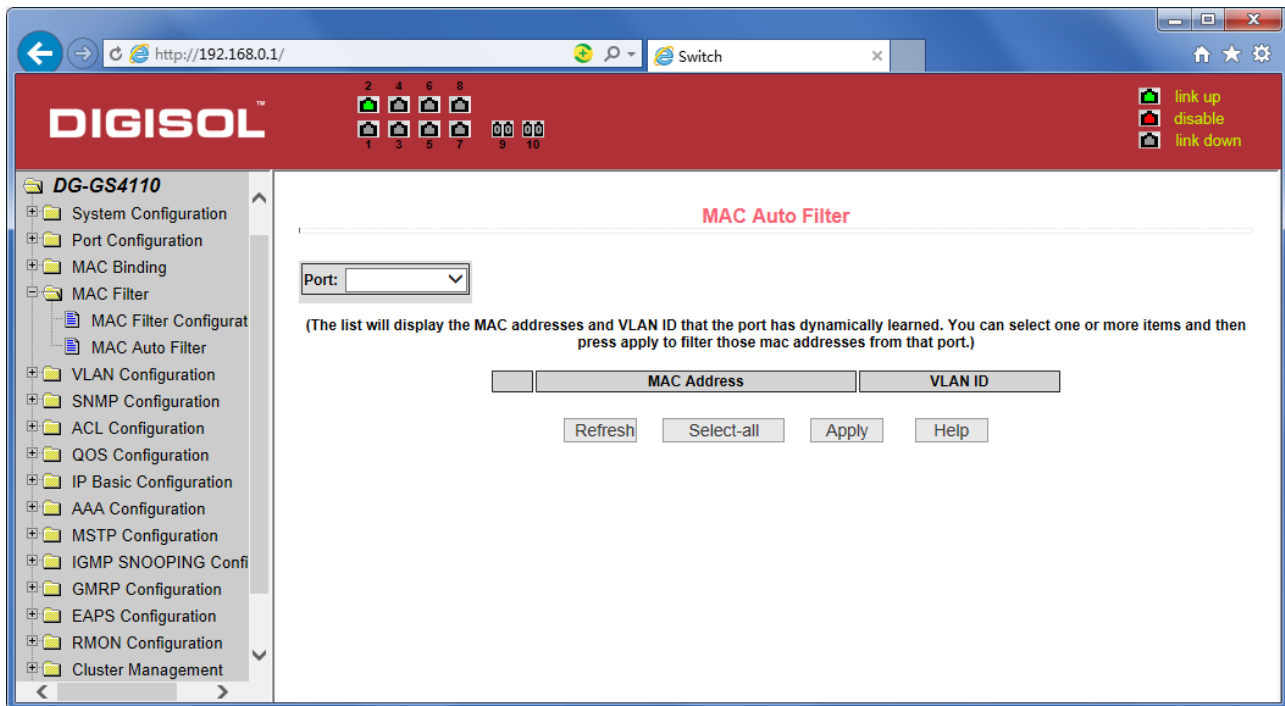


Figure 29 the MAC filtering automatic conversion page

5. VLAN Configuration

(1) VLAN information page

Figure 30 shows the current VLAN information page. This page is read-only page displays the current VLAN configuration information l, including the VID, state and port members. select VLAN from the drop-down VID, shows the port information of the Port VLAN members.

A port may not be a member of VLAN, which can be VLAN-tagged or untagged members . the meanings of characters pls see the following info:

- t tagged the port is the VLAN tagged member
- u untagged the port is the VLAN untagged member

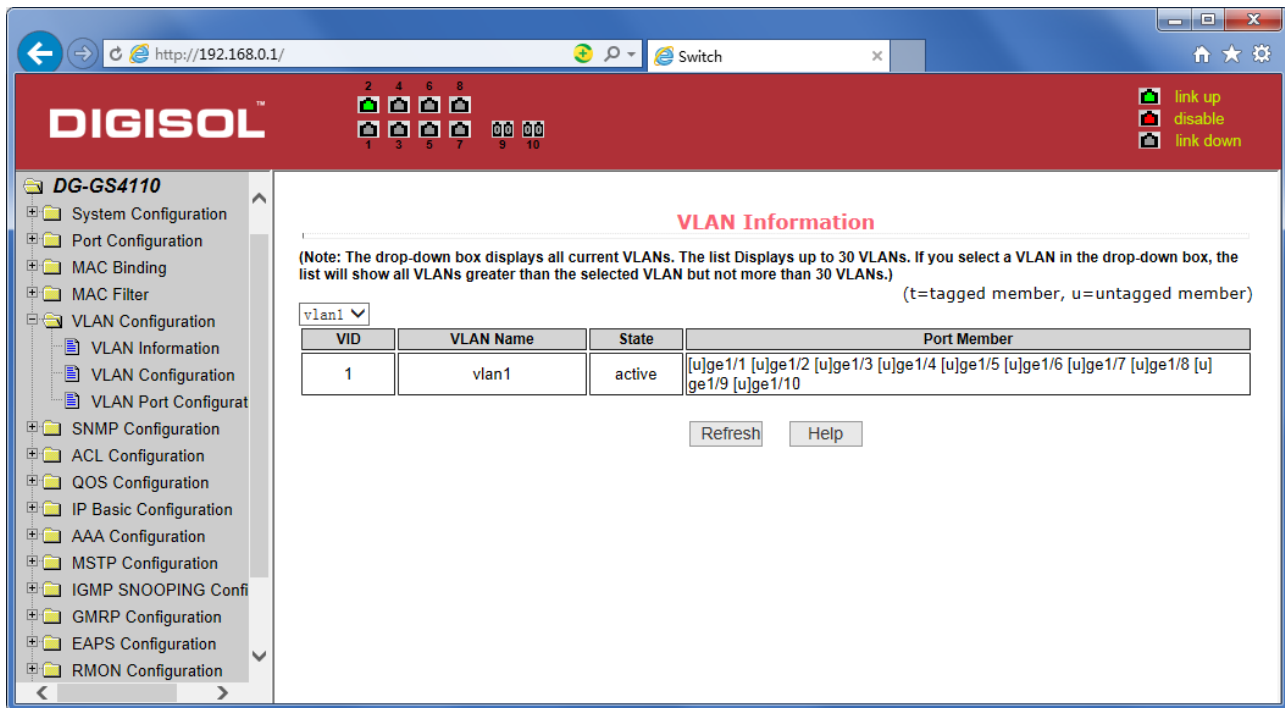


Figure 30 VLAN information page

(2) Static VLAN configuration page

Figure 31 is the static VLAN configuration page that allows users to create VLAN.

If you want to create a new VLAN, the user input VID on activity line, ranging from 2 to 4094. VLAN name is generated depend on VLAN ID and can not be modified. Click Apply button, then the list box displays the user-created VLAN's VID and VLAN name. Switch by default created VLAN1, and VLAN1 can not be removed

If you want to delete a VLAN, the user need to click the appropriate VLAN of the list box. The VLAN will be displayed in the activity line, click the Remove (Delete) key to delete the VLAN, the same time, the information of the VLAN to remove from the list box.

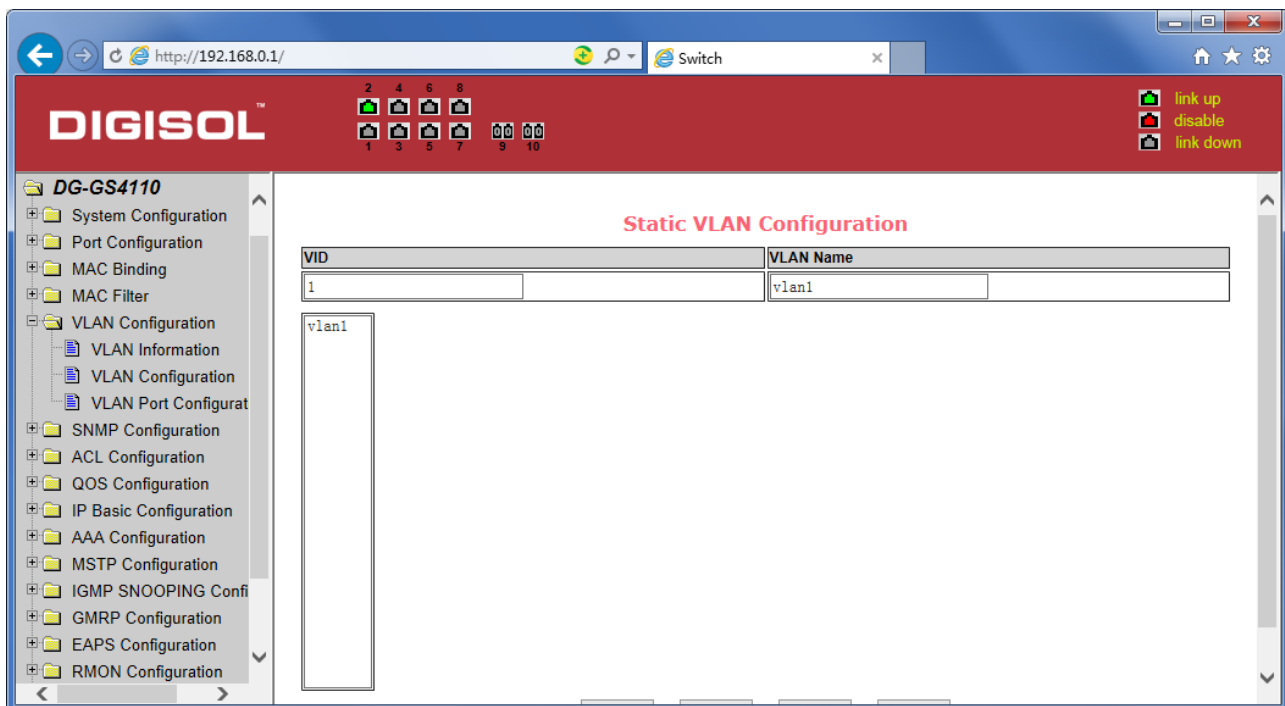


Figure 31 the static VLAN configuration page

(3) VLAN port configuration page

Figure 32 is a VLAN port configuration page, which is used to configure the VLAN port configuration and display results. This page mainly consists of eight parts: port, mode, all current VLAN, port-owned VLAN, key "default VLAN =>", "tagged =>", "untagged =>" and "non-members" =. "

Port is defined a designated port that will configure the VLAN

Mode Access designated the VLAN mode as the ACCESS mode, Under this mode, the port default VLAN is the untagged member of VLAN1, the port's default VLAN is 1. Hybrid specified port VLAN mode HYBRID model, in this mode, the port default VLAN is the untagged member of VLAN1, the port's default VLAN is 1. Trunk specified port VLAN mode is TRUNK mode, in which the port VLAN mode, the default is VLAN1 a tagged member of the port's default VLAN is 1.

All current VLAN that has been created VLAN, also it's can be configured VLAN, the user from the list select VLAN, can be multiple-choice.

VLAN Port-owned shows the results of VLAN port configuration, [p] indicates that the port VLAN is the default VLAN, [t] that the port is a VLAN tag members, [u] that the port is not tagged VLAN member. When you remove VLAN, the user from the list, select the VLAN, can be multiple-choice.

Button "default VLAN =>" to configure port the default VLAN, selected one VLAN from the current all the VLAN.

Button "tagged =>" Configured port is designated as a tagged member of VLAN, selected one or more VLAN from the current all VLAN.

Button "untagged =>" Configure VLAN port is a designated member of the untagged, selected one or more VLAN from the current all VLAN.

Button "non-members <=" to delete the port from the specified one or more of the VLAN ,no longer a member of the VLAN, from the port affiliated VLAN to selected one or more VLAN.

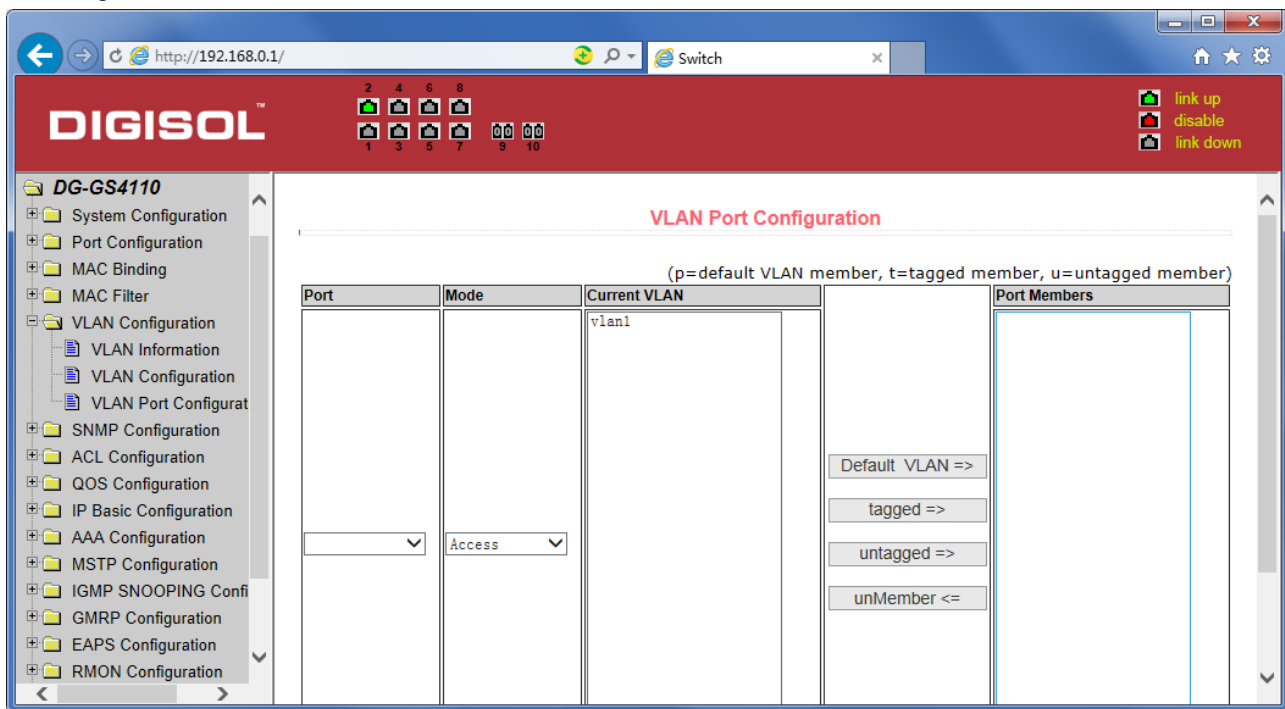


Figure 32 The VLAN port configuration page

6. SNMP Configuration

(1) SNMP share body configuration page

Figure 33 is a shared body of SNMP configuration page that allows users to configure the switch common body's name and read and write access, A total of 8 entries can be configured

By default, the switch there is a share name as named public, the common body is read-only access. With this correspondence, the activities of this page is only one entry, shared body names are public, access is read-only access. When the switch through SNMP for network management, you need to configure a read-write permissions to the shared body.

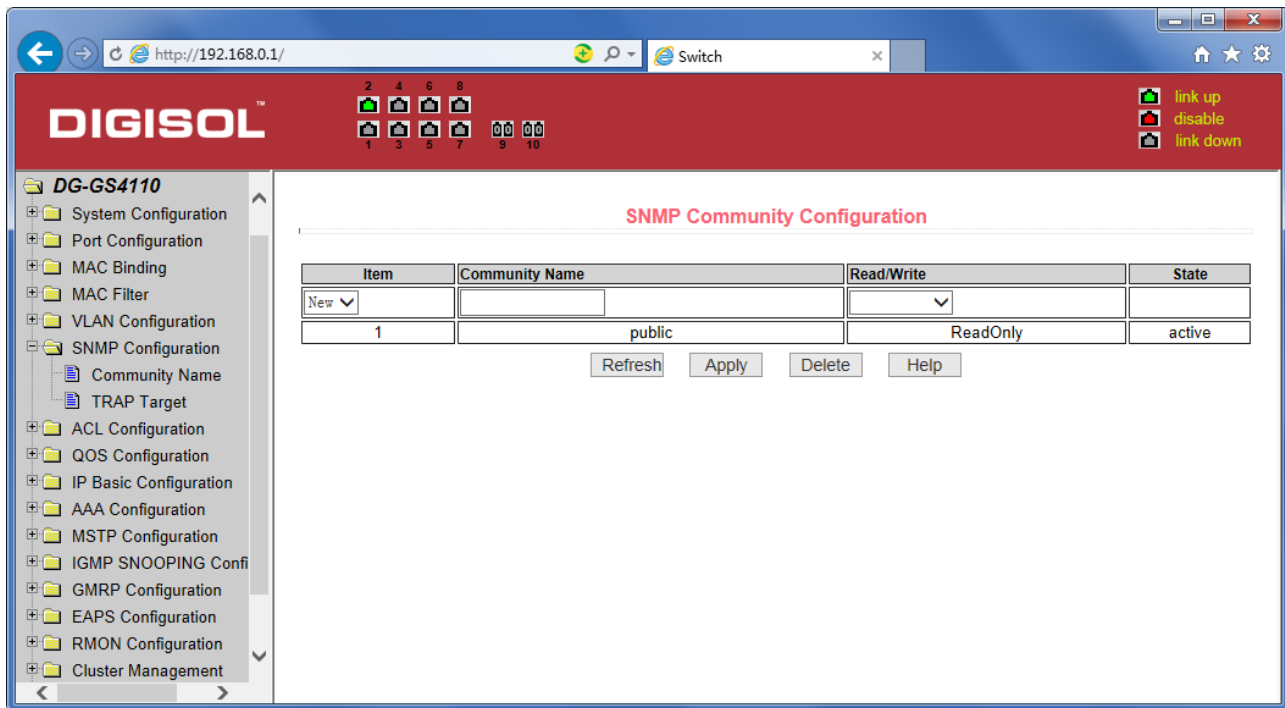


Figure 33 a shared body of SNMP configuration page

(2) TRAP target configuration page

Figure 34 is the TRAP target configuration page that allows users to configure the workstation to receive TRAP messages as well as the IP address of TRAP protocol packets of some of the parameters.

In the configuration entry, the name used to enter the TRAP name, IP address used to enter the target address, SNMP version used to select the version of the TRAP packet, if you set successful, it will show in the state to active. If the configuration was successful, SNMP TRAP functions will take effects ,in the event of link up or link down, the switch will automatically send a TRAP packet to the target address

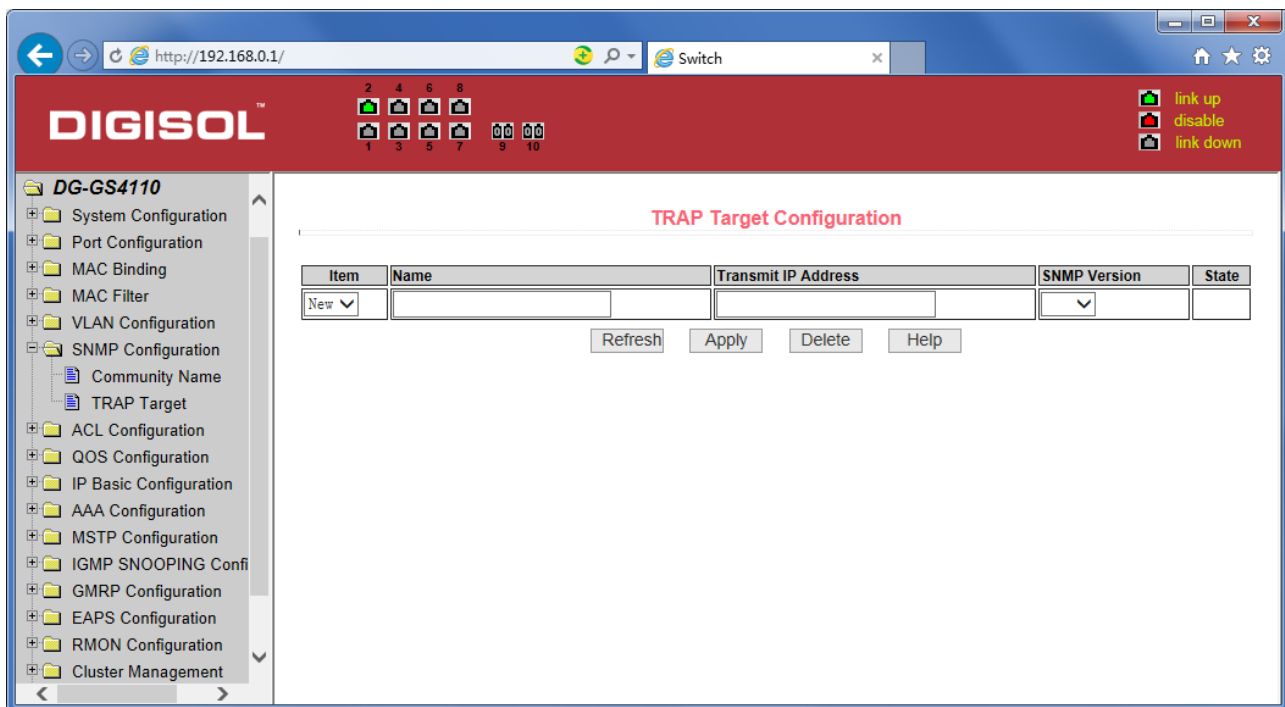


Figure 34 the TRAP target configuration page

7. ACL Configuration

(1) IP Standard ACL configuration page

Figure 35 is the IP standard ACL configuration page. users can through this page to build ACL standard IP-rule base. user can select a ACL group number, in the group to create one or more rules. In a rule can match only the source IP address field (with mask). The standard IP rules to control the source IP address packet forwarding.

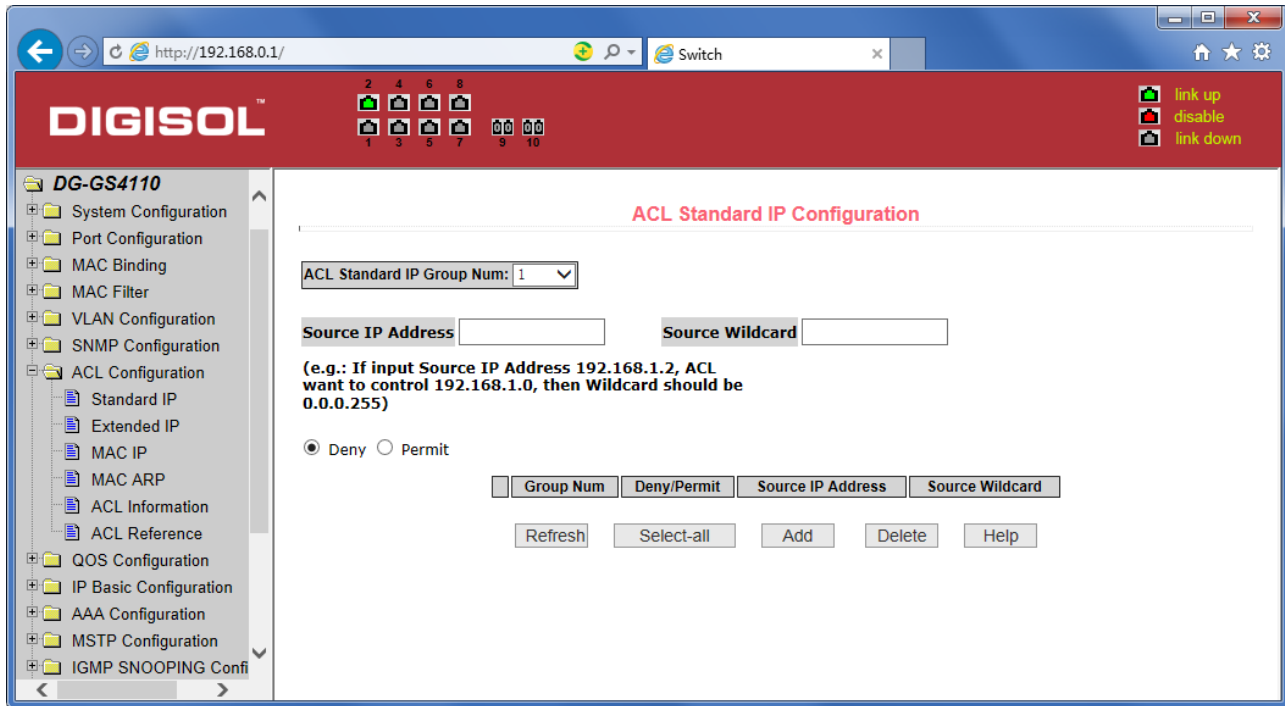


Figure 35 the IP standard ACL configuration page


Users to configure the rules, the source IP address must be in with a mask, the rule can match the collection of IP addresses. The address mask is use anti-code , if the rule were to match the IP address range 192.168.0.0 to 192.168.0.255, then the IP address can be 192.168.0.1, and its mask of 0.0.0.255.

Users to configure the rules, each rule must have a filter mode: allow or deny.

The user to create a rule in the group, the system will automatically give the rule a rule number, when to delete a rule in the group 1 rules, other rules remain unchanged, the system will automatically give the rule a rule group sort. If the user wants to delete the entire rule set, you can first select all, then click the delete key.

(2) IP Extended ACL configuration page

Figure 36 is the IP extended ACL configuration page. The extended IP group is an extension of the standard IP rules. Control the packet forwarding via source IP, Destination IP, IP protocol type and service port.

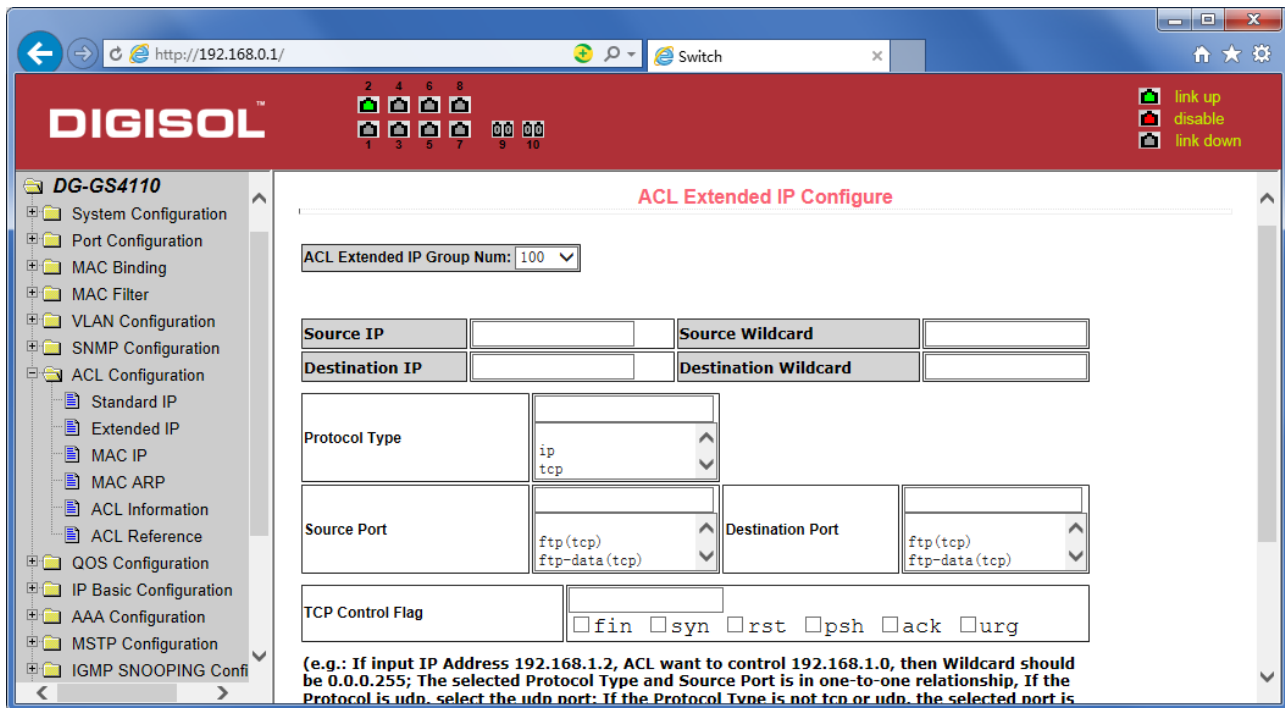

DIGISOL™

link up
disable
link down

DG-GS4110

- System Configuration
- Port Configuration
- MAC Binding
- MAC Filter
- VLAN Configuration
- SNMP Configuration
- ACL Configuration
 - Standard IP
 - Extended IP
 - MAC IP
 - MAC ARP
 - ACL Information
 - ACL Reference
- QOS Configuration
- IP Basic Configuration
- AAA Configuration
- MSTP Configuration
- IGMP SNOOPING Conf

ACL Extended IP Configure

ACL Extended IP Group Num: 100

Source IP: Source Wildcard:

Destination IP: Destination Wildcard:

Protocol Type: ip
tcp

Source Port: ftp(tcp)
ftp-data(tcp) Destination Port: ftp(tcp)
ftp-data(tcp)


TCP Control Flag: ☐ fin ☐ syn ☐ rst ☐ psh ☐ ack ☐ urg

(e.g.: If input IP Address 192.168.1.2, ACL want to control 192.168.1.0, then Wildcard should be 0.0.0.255; The selected Protocol Type and Source Port is in one-to-one relationship, If the Protocol is udp, select the udp port; If the Protocol Type is not tcp or udp, the selected port is

Figure 36 the IP Extended ACL configuration page

(3) MAC IP ACL configuration page

Figure 37 is the MAC IP ACL configuration page. IP MAC group can be the IP packet source and destination MAC address and source and destination IP address control.

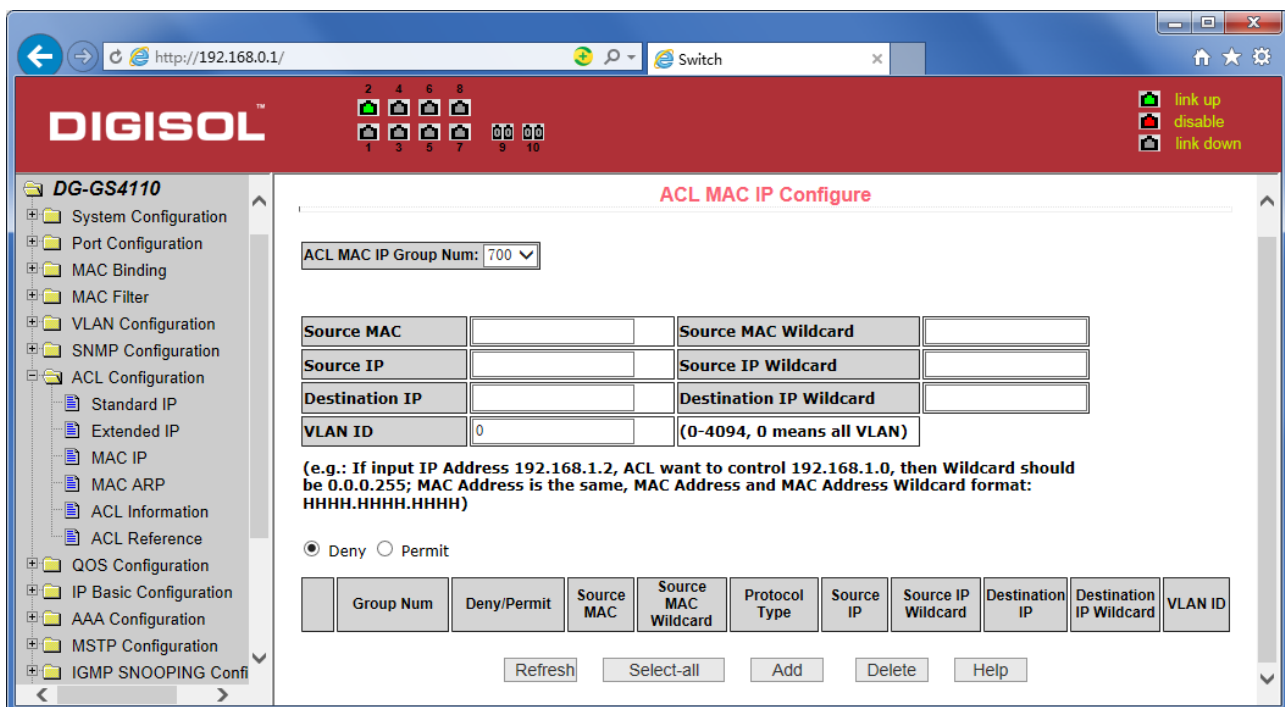

DIGISOL™

link up
disable
link down

DG-GS4110

- System Configuration
- Port Configuration
- MAC Binding
- MAC Filter
- VLAN Configuration
- SNMP Configuration
- ACL Configuration
 - Standard IP
 - Extended IP
 - MAC IP
 - MAC ARP
 - ACL Information
 - ACL Reference
- QOS Configuration
- IP Basic Configuration
- AAA Configuration
- MSTP Configuration
- IGMP SNOOPING Conf

ACL MAC IP Configure

ACL MAC IP Group Num: 700

Source MAC: Source MAC Wildcard:

Source IP: Source IP Wildcard:

Destination IP: Destination IP Wildcard:

VLAN ID: 0 (0-4094, 0 means all VLAN)

(e.g.: If input IP Address 192.168.1.2, ACL want to control 192.168.1.0, then Wildcard should be 0.0.0.255; MAC Address is the same, MAC Address and MAC Address Wildcard format: HHHH.HHHH.HHHH)

☒ Deny ☐ Permit

Group Num	Deny/Permit	Source MAC	Source MAC Wildcard	Protocol Type	Source IP	Source IP Wildcard	Destination IP	Destination IP Wildcard	VLAN ID

Refresh Select-all Add Delete Help

Figure 37 the IP Extended ACL configuration page

(4) MAC ARP ACL configuration page

Figure 39 is the MAC ARP ACL configuration page. ARP group can be the type of the operation of the ARP packet, the sender MAC and the sender IP control.

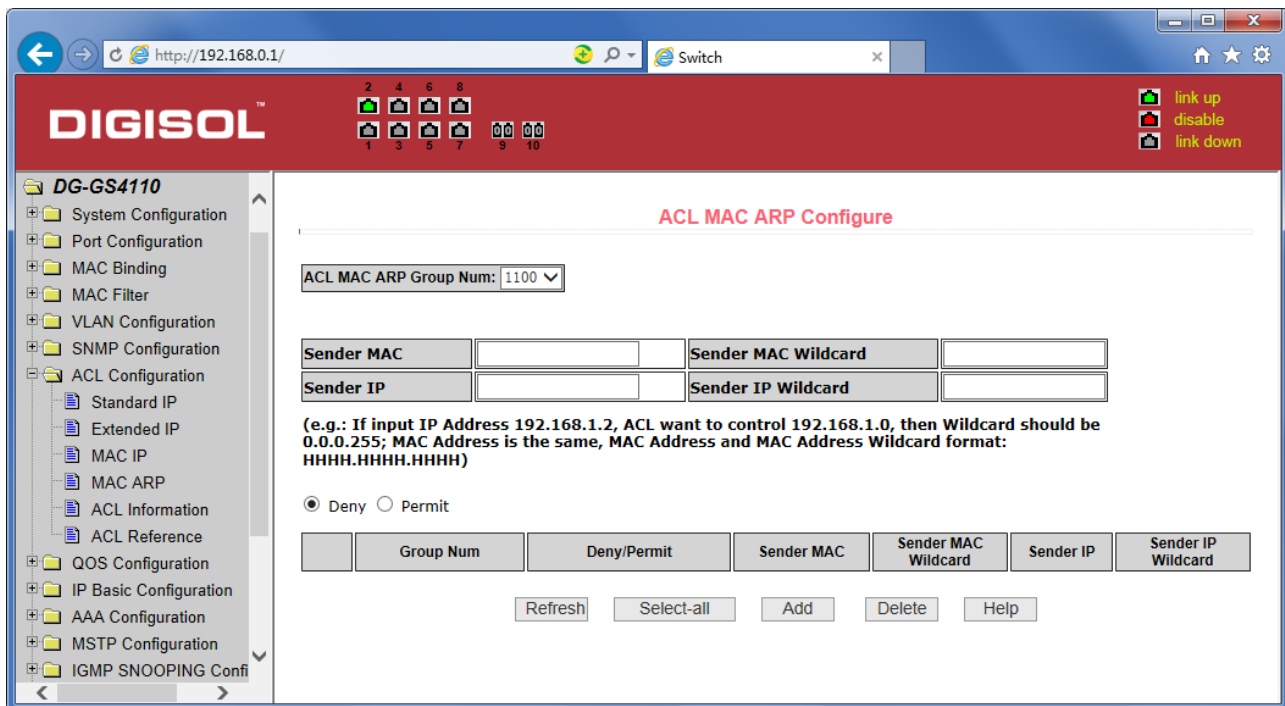


Figure 39 the IP Extended ACL configuration page

(5) ACL information page

Figure 40 is the ACL information page, which displays the current ACL rules configured in all the information.


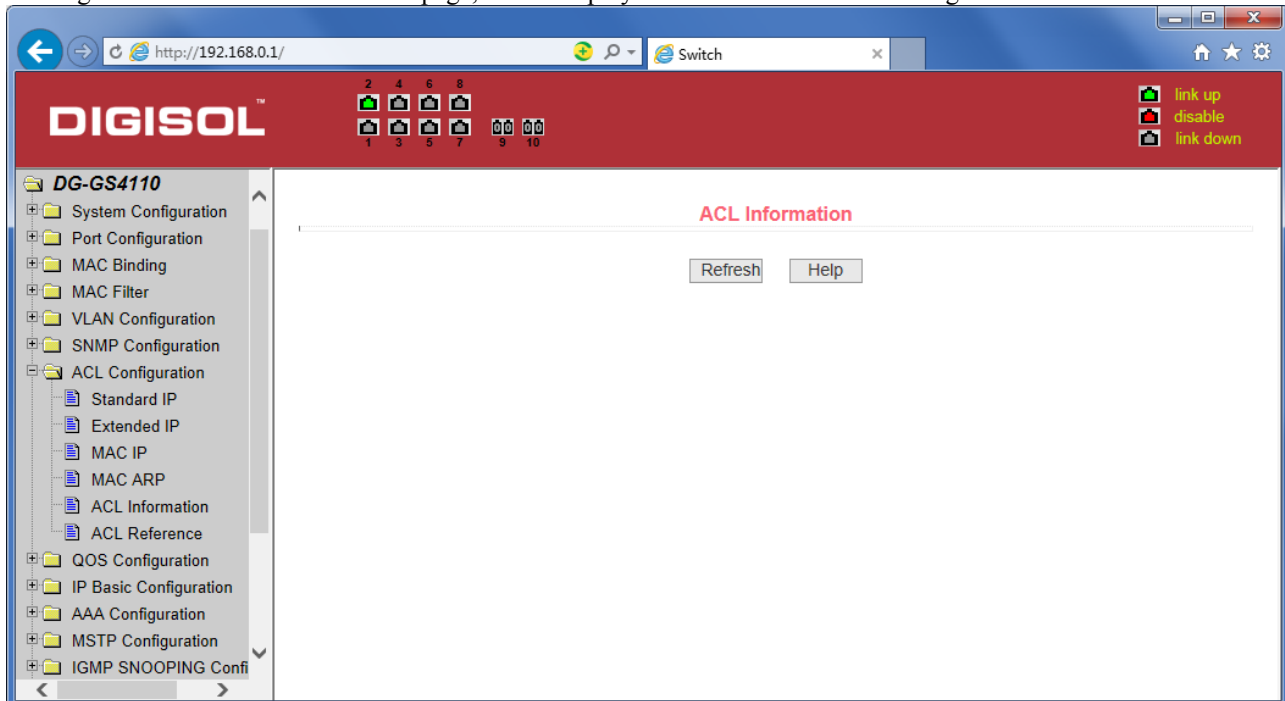


Figure 40 is the ACL information page

8. QoS Configuration

(1) QoS Apply Configuration Page

Figure 41 is a QoS Apply configuration page.

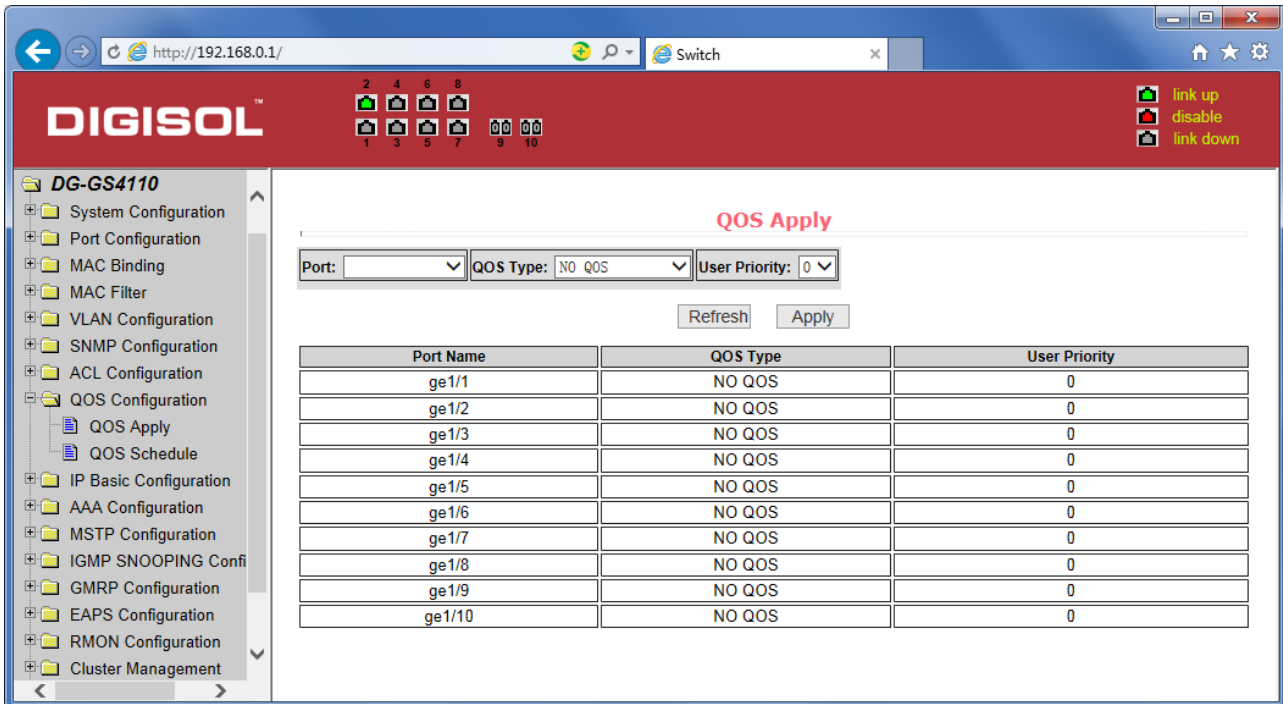

QoS Apply


Port: QoS Type: User Priority:

Port Name	QoS Type	User Priority
ge1/1	NO QOS	0
ge1/2	NO QOS	0
ge1/3	NO QOS	0
ge1/4	NO QOS	0
ge1/5	NO QOS	0
ge1/6	NO QOS	0
ge1/7	NO QOS	0
ge1/8	NO QOS	0
ge1/9	NO QOS	0
ge1/10	NO QOS	0

Figure 41 QoS Apply configuration page

(2) QoS Schedule Configuration Page

Figure 42 is a QoS Schedule configuration page.

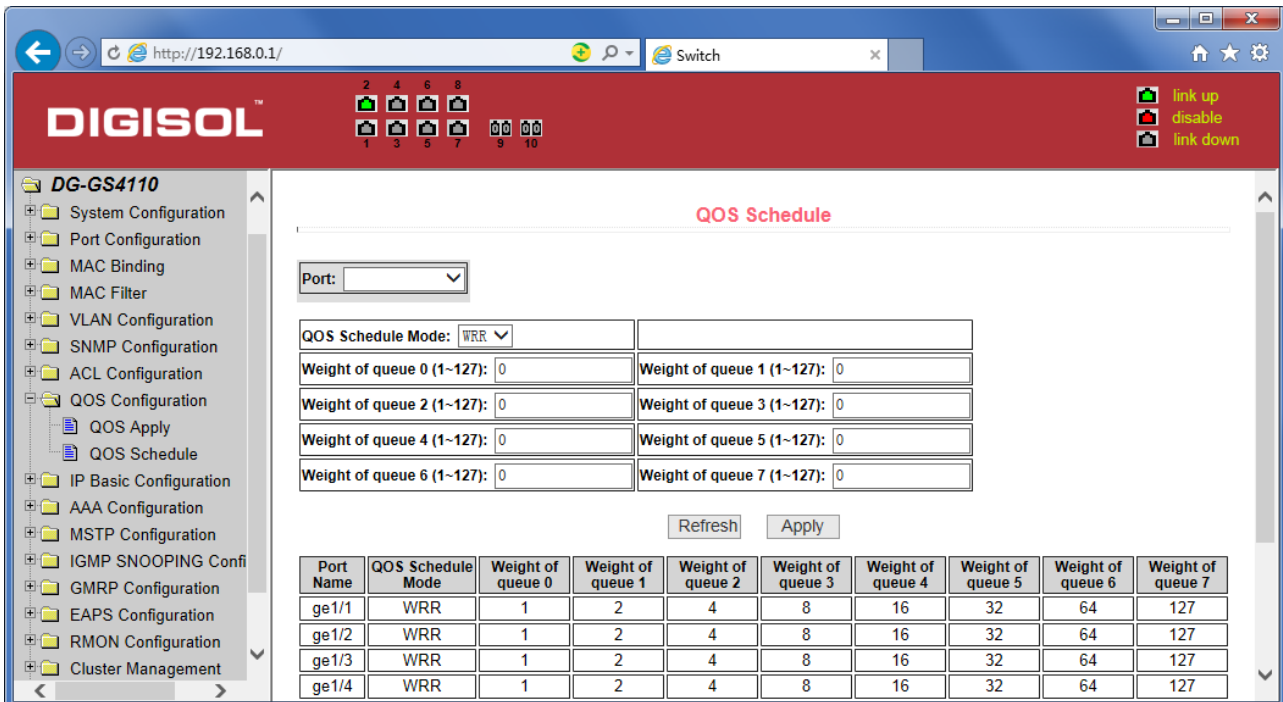

QoS Schedule

Port:

QoS Schedule Mode:

Weight of queue 0 (1~127): Weight of queue 1 (1~127):

Weight of queue 2 (1~127): Weight of queue 3 (1~127):

Weight of queue 4 (1~127): Weight of queue 5 (1~127):

Weight of queue 6 (1~127): Weight of queue 7 (1~127):

Port Name	QoS Schedule Mode	Weight of queue 0	Weight of queue 1	Weight of queue 2	Weight of queue 3	Weight of queue 4	Weight of queue 5	Weight of queue 6	Weight of queue 7
ge1/1	WRR	1	2	4	8	16	32	64	127
ge1/2	WRR	1	2	4	8	16	32	64	127
ge1/3	WRR	1	2	4	8	16	32	64	127
ge1/4	WRR	1	2	4	8	16	32	64	127

Figure 42 QoS Schedule configuration page

9. IP Basic Configuration

(1) VLAN Interface Configuration Page

Figure 43 is a VLAN interface configuration page, users can configure the VLAN interface through this page, delete VLAN interfaces, configure the interface IP address, remove the interface IP address, and view interface information. VLAN already exists can only be set when the interface can only be configured on the interface set interface address.

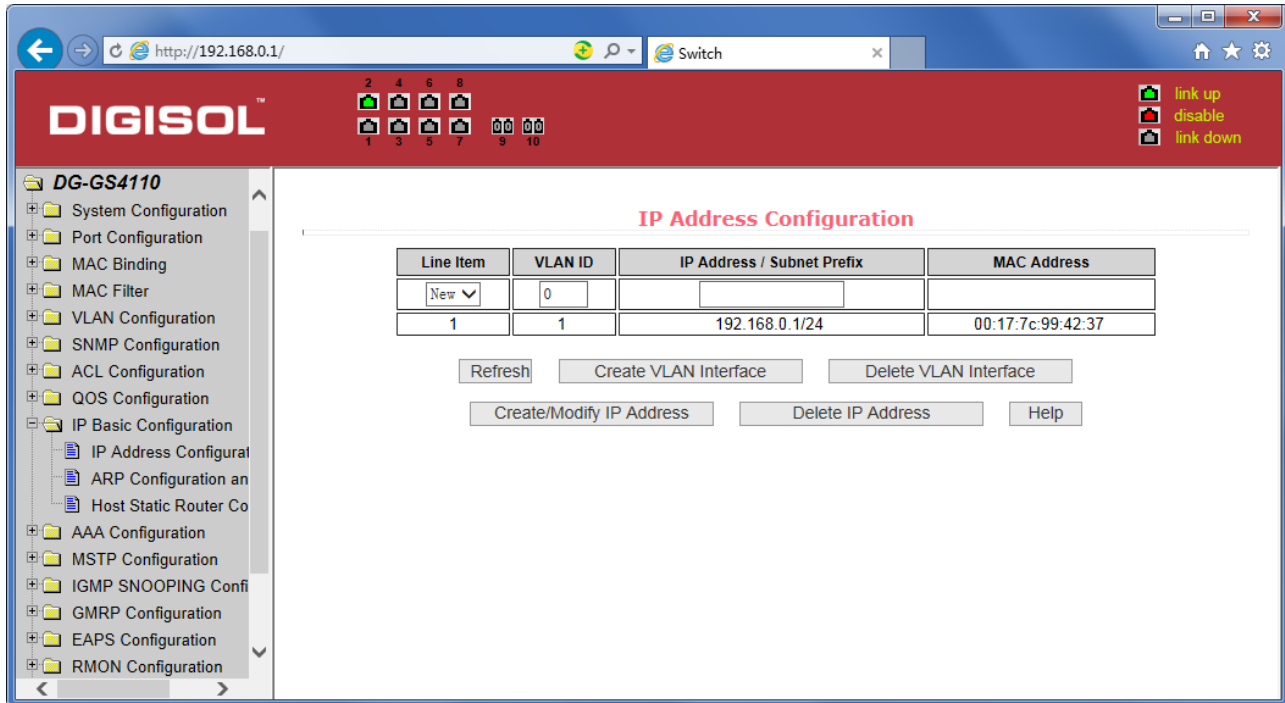


Figure 43 VLAN interface configuration page

Switch in the default have a VLAN1 interface, the interface cannot be deleted. One can only configure a VLAN interface.

(2) ARP configuration and display page

Figure 44 is the ARP configuration and display page, this page can display all of the information of the ARP table switch, while users can configure a static ARP entries on this page, delete ARP entries, and revised the dynamic ARP table entry to a static ARP table entry.

When a user configure a static ARP entry, the need to enter the IP address and MAC address, MAC address must be a unicast MAC address, and then click Add button.

When a user delete an ARP entry, you can choose to delete an IP-ARP table entry, remove a segment of the ARP table entry, delete all of the ARP table entry, delete all dynamic ARP table entries and delete all of the static ARP table entry. For the deletion of an IP-ARP table entries, or delete a segment of the ARP table entry required to enter in the input box, specify the IP address or IP network segment. Then click the Delete button

When dynamic ARP table entry was revised to a static ARP table entry, you can choose to a particular network segment or all of the dynamic ARP table entry was revised to a static ARP table entry. For the situation to a network segment is required in the input box, enter the specified network segment. And then click Apply button

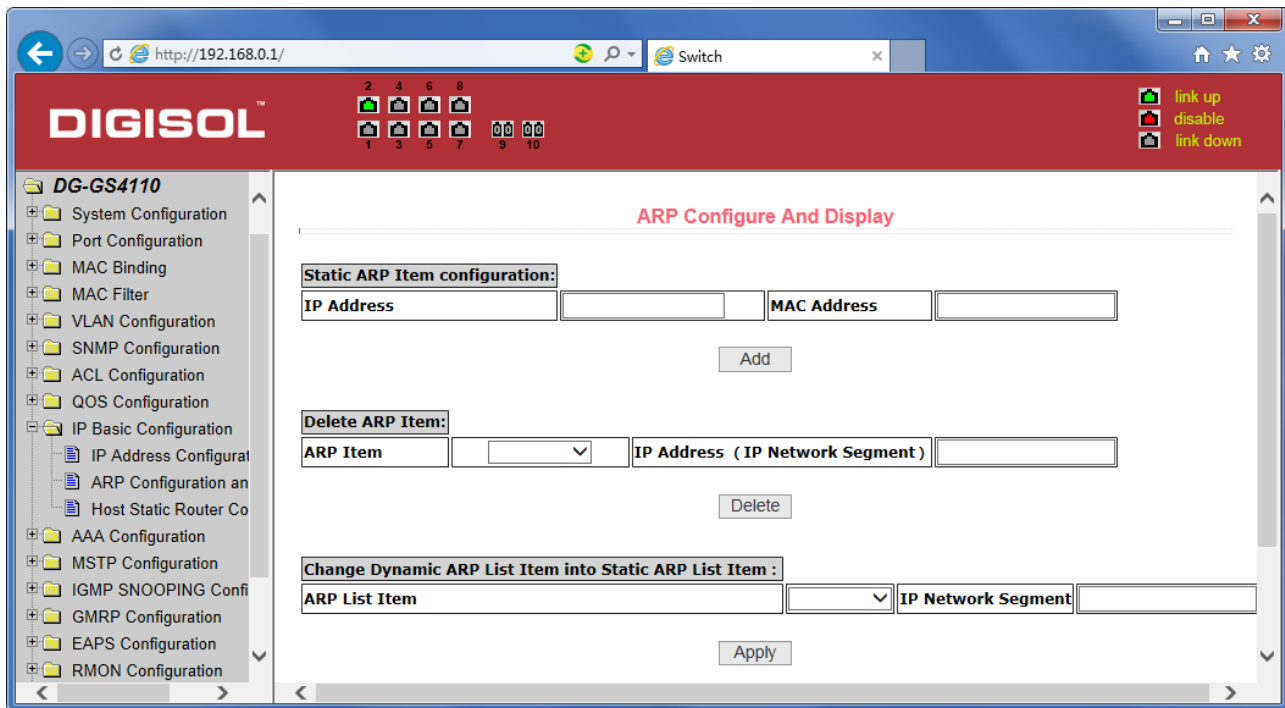


Figure 44 the ARP configuration and display page

(3) Host Static Routing configuration page

Figure 45 is the host static route configuration page, the user can through this page to add, delete static routing switch hosts. By default, the switch is not configured to host a static route, the user can configure the default route through this page, that is the purpose of address / subnet prefix is 0.0.0.0 / 0 routing

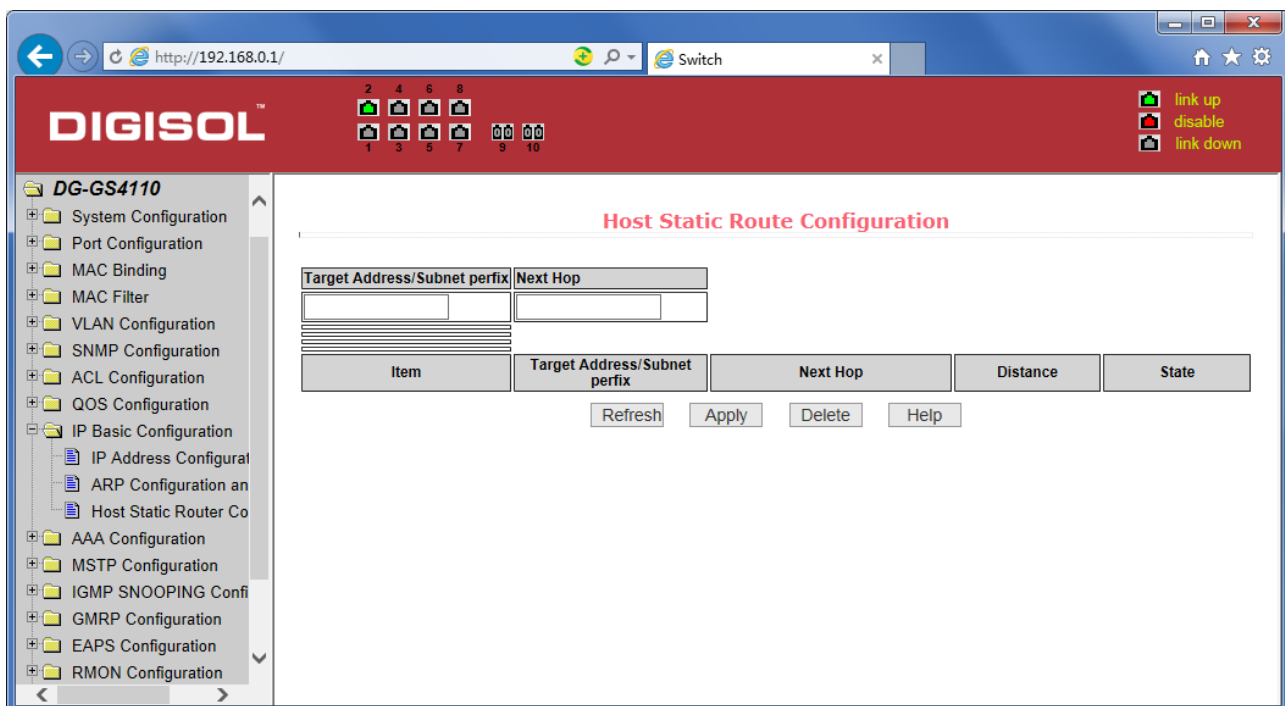


Figure 45 the host static route configuration page

10. Certification. Authorization. Accounting (AAA) configuration

(1) Radius Configuration Page

- Figure 46 is the Radius configuration page, users can configure with the Radius-related information, you can set information includes:
 1. Be sure to set the Radius server's IP address before do the authentication and accounting in this field,
 2. Optional Radius server IP address, if there is spare Radius server can set this field.
 3. Authentication UDP port, the default value is 1812, the user generally do not need to modify this field.
 4. whether to activate the , the default is to start, and when you do authentication and accounting in general to start charging.
 5. Accounting UDP port, the default value is 1813.
 6. shared secret key is used to setting the shared encryption password between the switch and the Radius server, so be sure to set the authentication and accounting in this field, and with the same settings on the Radius server.
 7. vendor-specific information, the users typically do not need to modify this field.
 8. NAS ports, NAS port type, NAS type of service, these three values do not change in general.
 9. whether to on or off the roaming feature of Radius.

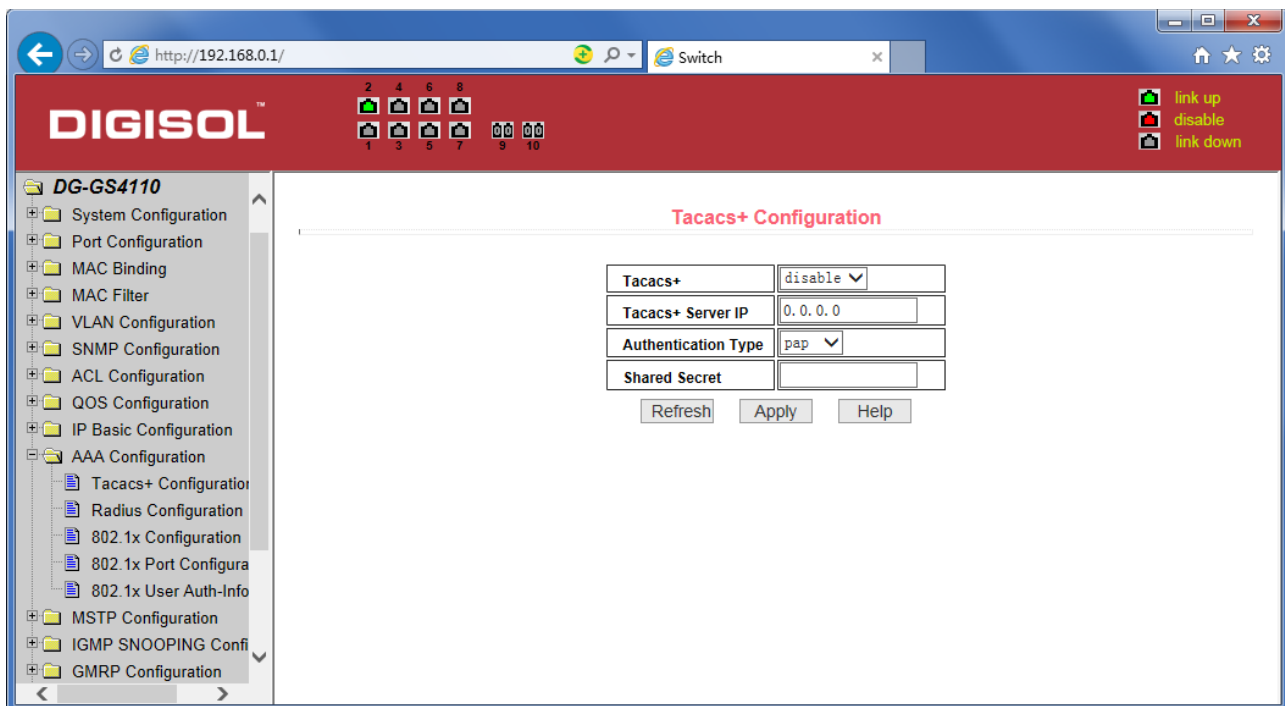


Figure 46 the Radius configuration page

(2) 802.1x Configuration Page

Figure 47 is the 802.1x configuration page, users can configure 802.1x related information on this page, including:

1. whether to activate the 802.1x protocol, when doing authentication and accounting must be to start 802.1x protocol.
2. switch is to adopt a common authentication method or the expansion of authentication.
3. whether to open re-authentication function, the default is not open .when you do authentication and accounting based on the actual circumstances. Open the re-authentication feature will make users more reliable when using the authentication and accounting, but it will slightly increase the network traffic.
4. Setting re-certification time interval, only to re-open the case of authentication to be valid, the default is 3600 seconds, when you do authentication and accounting based on the actual situation to set the value, but the value is not too small.
5. Quiet Period Timer, users typically do not need to modify this field.
6. Tx-Period Timer, users typically do not need to modify this field.
7. Server timeout timer, users typically do not need to modify this field.
8. supplicant timeout timer, users typically do not need to modify this field.
9. Max Request number, users generally do not need to modify this field.

10. showing Reith Max size.
11. Client Version, the client version number.
12. Check Client, whether the certification passed then examine the client's regular flow of packets.

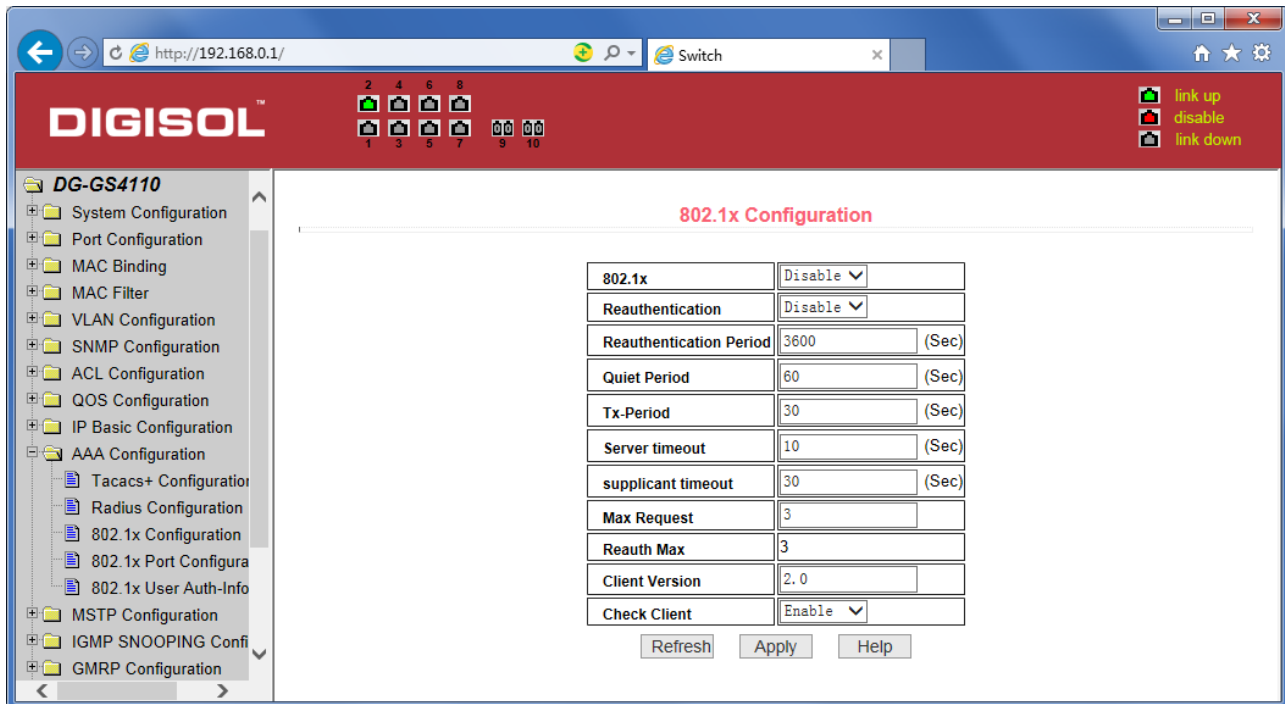


Figure 47 the 802.1x configuration page

(3) 802.1x port configuration page

Figure 48 is the 802.1x port configuration page, the user through this page to configure the support 802.1x port mode and hosts of the largest, at the same time you can view each port 802.1x configuration. 802.1x port model includes four types: N / A State, Auto state, Force-authorized state and Force-unauthorized state. When a port needs to do 802.1x Authentication, need to set Auto state, if not do authentication to access the network, to set N / A state, the other two states are rarely used in practical applications

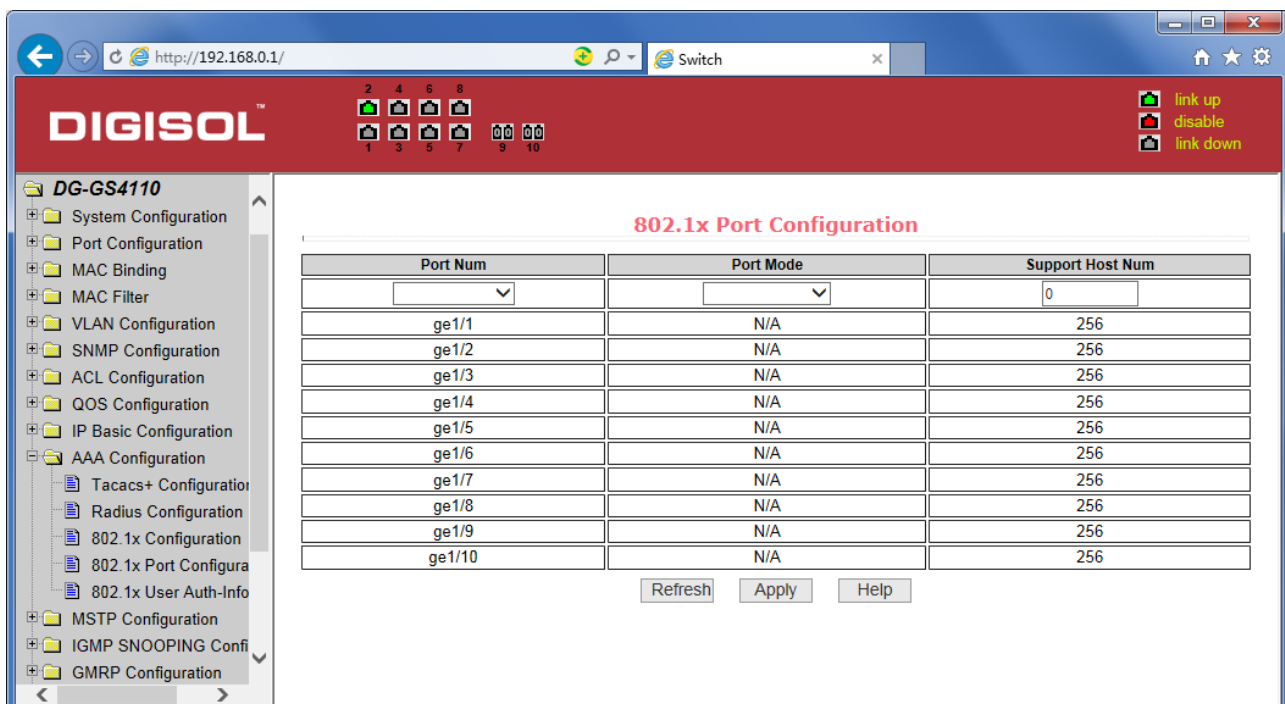


Figure 48 the 802.1x port configuration page

Doing 802.1 x authentications, port access, the default maximum host number is 100, the user can modify this field, the biggest support to the 100.

(4) 802.1x user authentication information page

Figure 49 is a 802.1x user authentication information page, the user can see through this page, under a certain port access for all users of the state information,

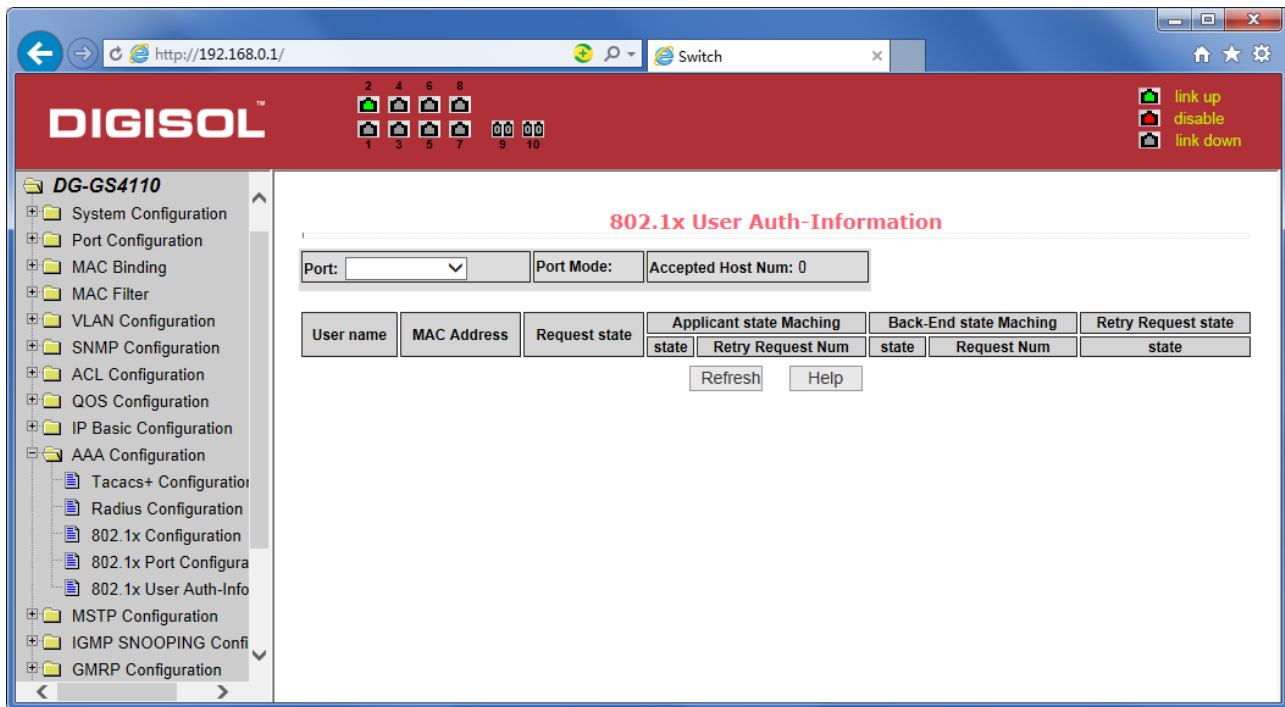


Figure 49 802.1x user authentication information page

11. Spanning Tree Protocol configuration

(1) MSTP global configuration page

Figure 50 is the MSTP global configuration page, through which you can configure some MSTP related information, mainly including:

- Whether to enable MSTP.
- Configure the bridge priority. Devices with lower priority are more likely to be the root bridge.
- Enable BPDU filtering function on the port in the port fast bode-filter default state.
- Enable BPDU guard function on the port in the port fast bode-guard default state.
- Configure the forwarding delay.
- Configure the interval for sending MSTP Hello packets.
- The err disable mechanism is started. When a port that starts a BPDU guard receives a BPDU, it starts the error disable timer. Error disable restarts this port after the configured timeout.
- Configure error disable timeout time.
- Configure the number of seconds the switch waits to receive spanning tree configuration information before triggering a reconfiguration.
- Configure the number of hops specified before a BPDU is dropped in a domain.
- Start or shut down and Cisco compatible spanning tree protocol.

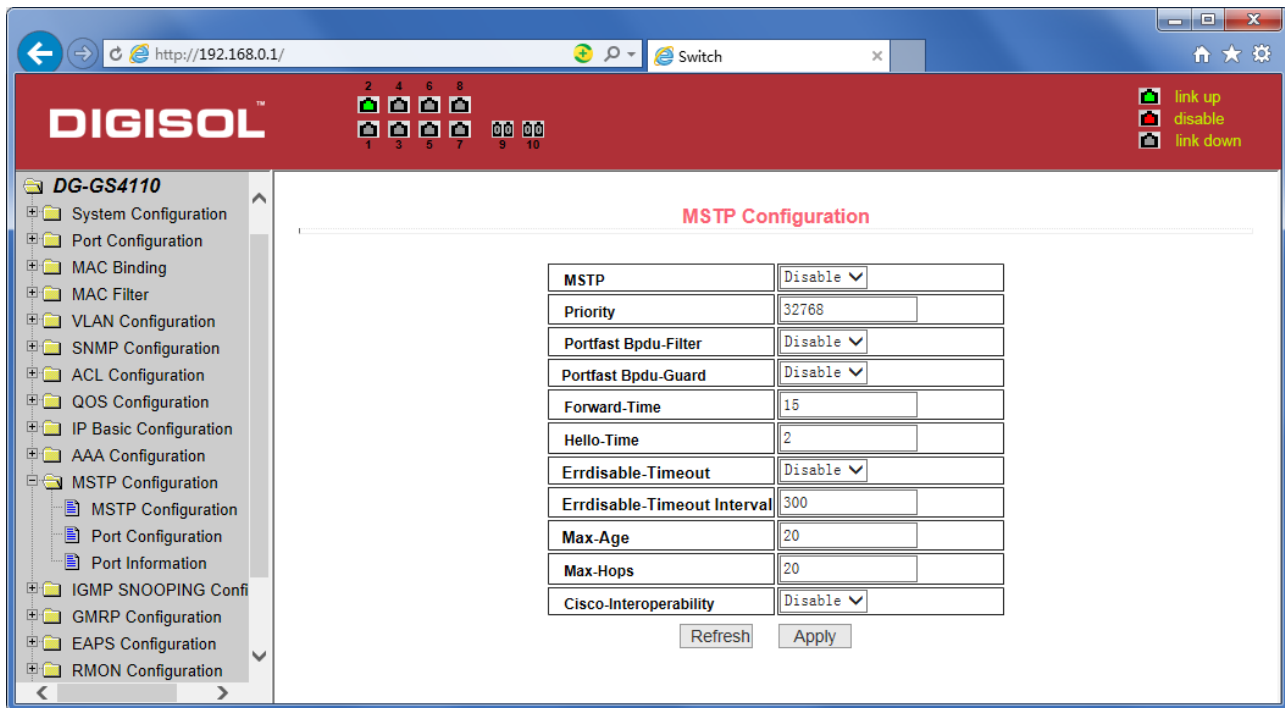


Figure 50 MSTP Global Configuration Page

(2) MSTP port configuration page

Figure 51 is the MSTP global configuration page. Through this page, you can configure some MSTP related information, mainly including:

- Select the port to be configured.
- Configure a port as a port fast port to enable the port from the blocking state to the forwarding state, bypassing the listening and learning states.
- Open the BPDU filter on the selected port.
- Enable BPDU guard on the selected port.
- Enable the root guard function, and do not accept BPDU packets with a higher priority than the bridge. Specify the switch as the root switch.
- Configure the connection type. point-to-point: The type of connection is point-to-point, allowing fast transition of the port status. shared: Connection type is shared, does not allow rapid conversion of port status, to go through the calculation process of 802.1D to determine the status of the port.
- Configure the cist priority of the interface. Range 0-240, can only be a multiple of 16. The default is 128.
- Configure the cist path cost. Range 1-200000000. The default is 20000000. Lower path costs are more likely to be roots.
- Configure the type of protocol packets to be sent.

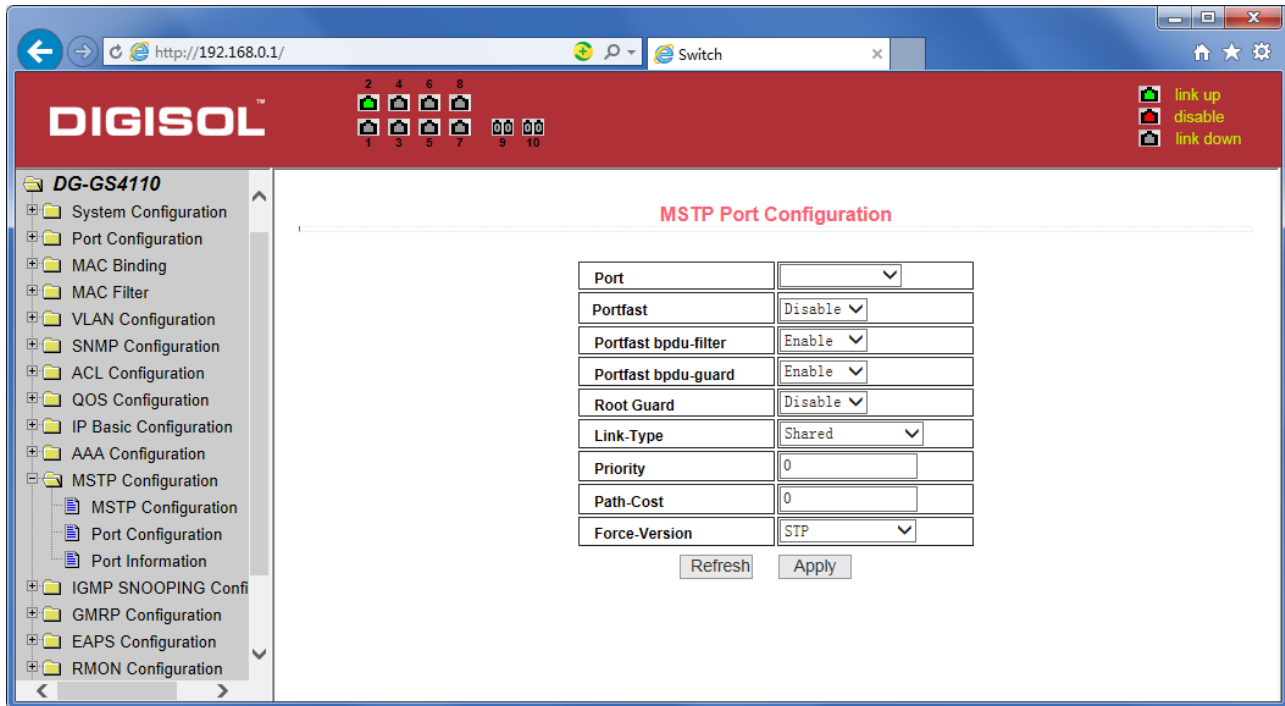


Figure 51 MSTP Port Configuration Page

(3) MSTP configuration information page

Figure 52 is the MSTP configuration information page, through which you can view some MSTP related information

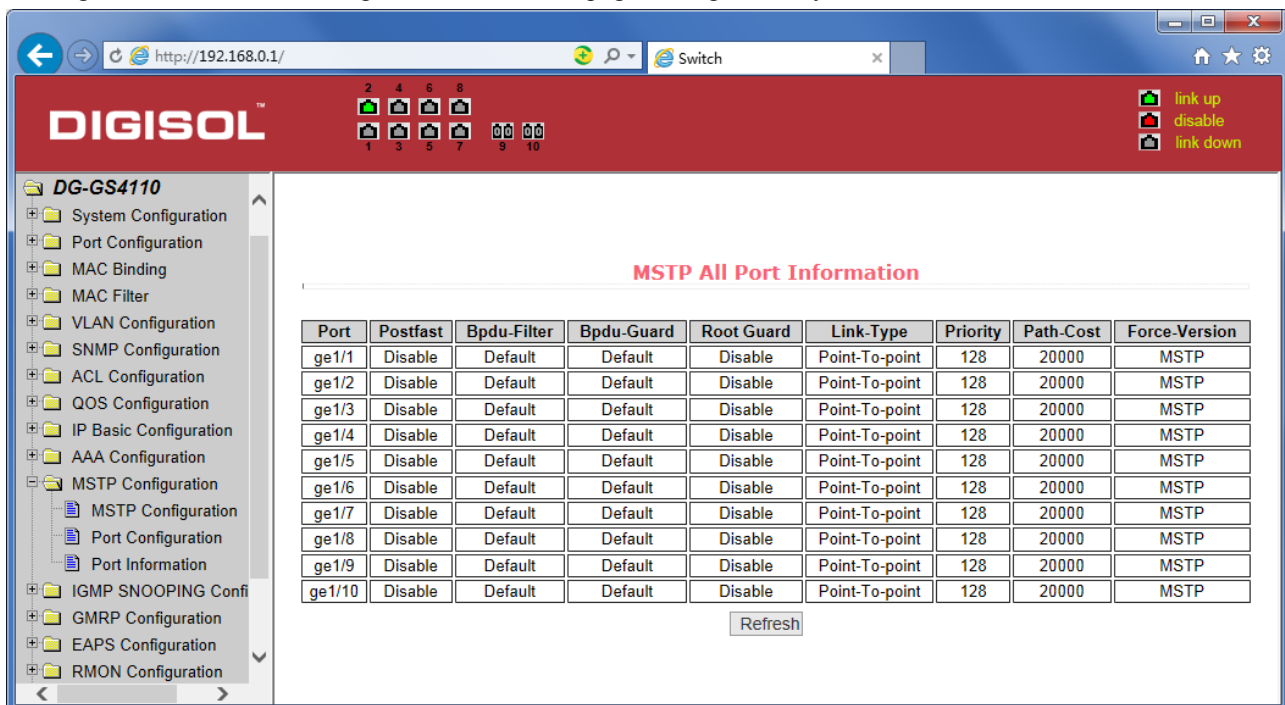


Figure 52 MSTP Configuration Information page

12. IGMP SNOOPING configuration

(1) IGMP SNOOPING configuration page

Figure 53 is the IGMP SNOOPING configuration page, through which you can start IGMP SNOOPING.

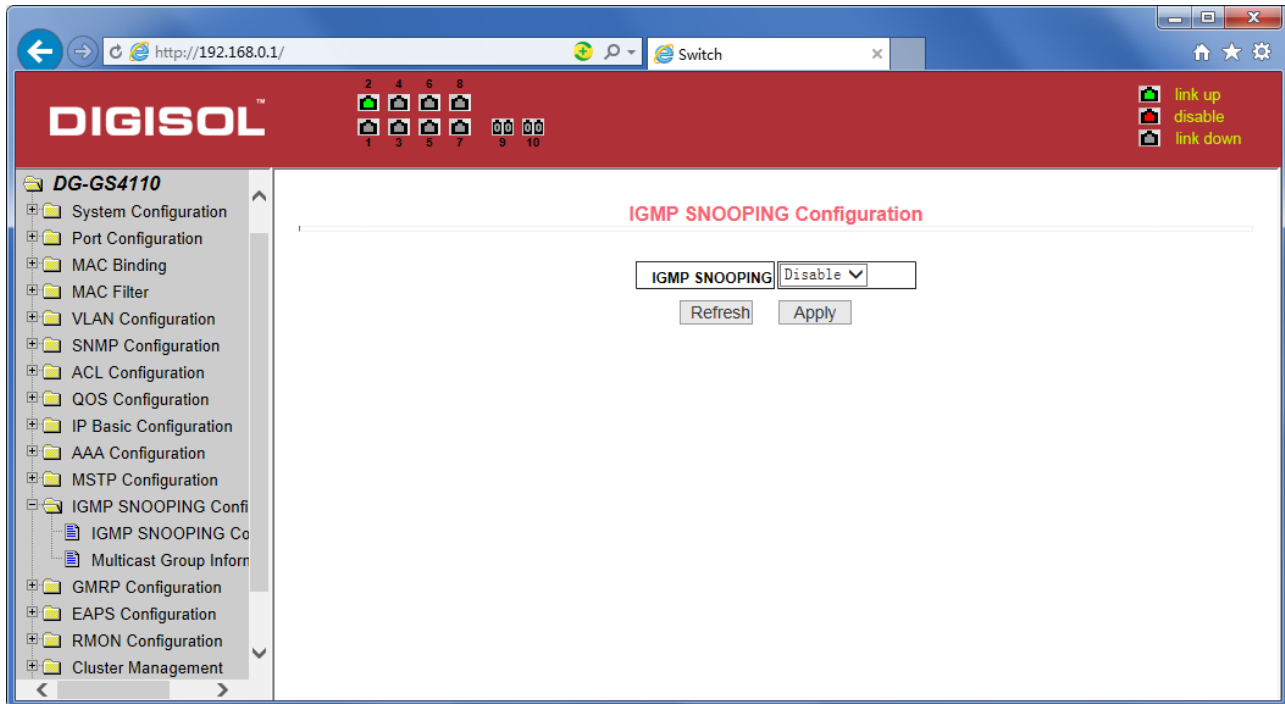


Figure 53 IGMP SNOOPING configuration page

(2) IGMP SNOOPING information page

Figure 54 is the IGMP SNOOPING information page, which allows users to view some information about IGMP SNOOPING.

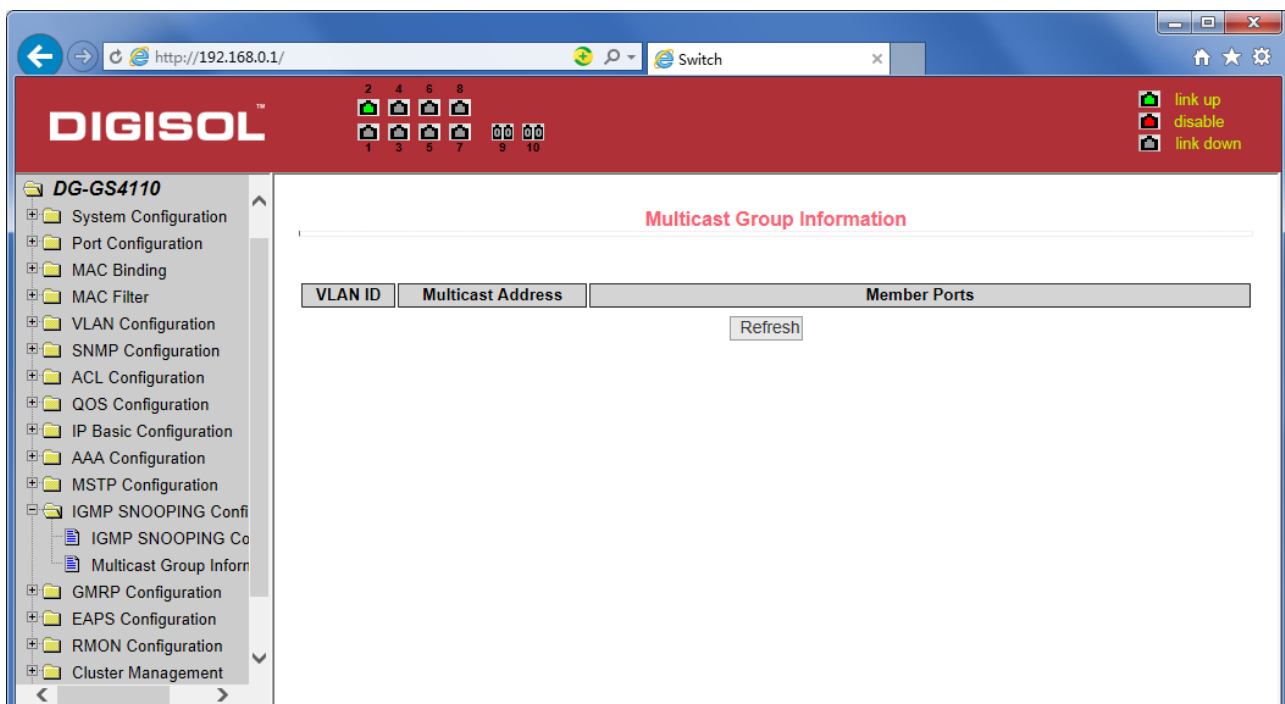


Figure 54 IGMP SNOOPING Information page

13. GMRP configuration

(1) GMRP Global Configuration Page

Figure 55 shows the GMRP global configuration page. Users can enable GMRP through this page.

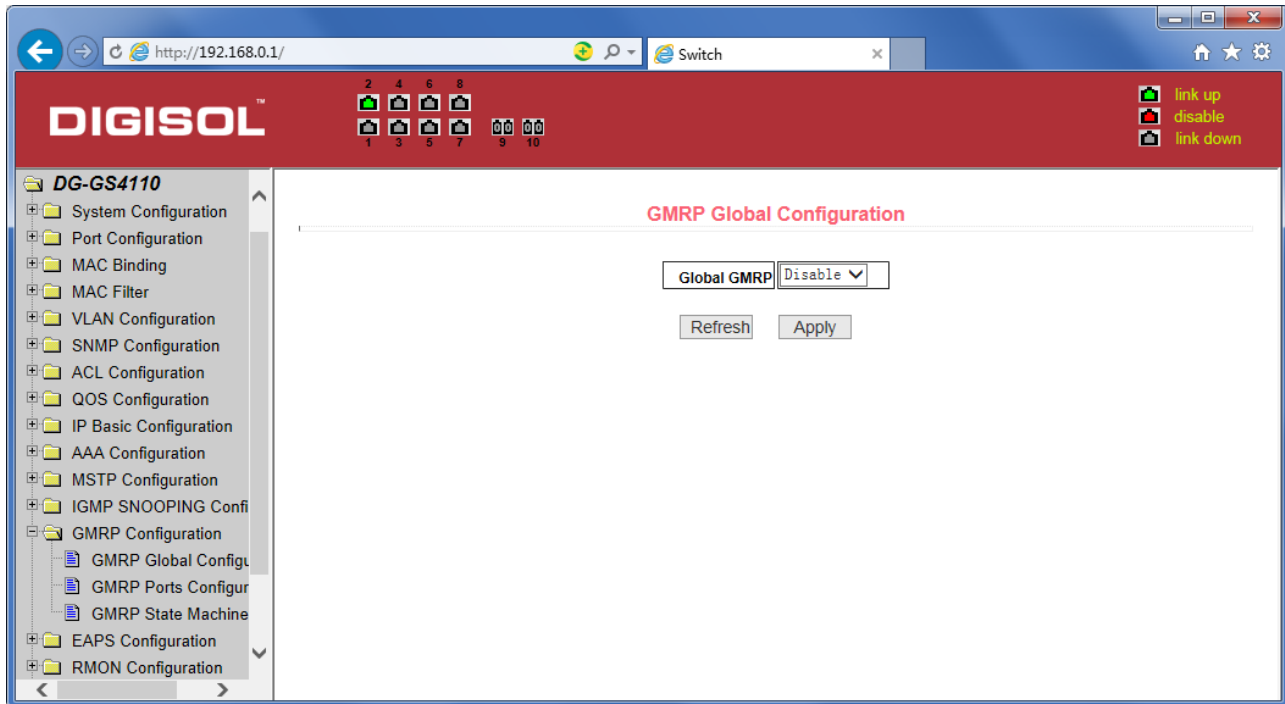


Figure 55 GMRP Global Configuration Page

(2) GMRP port configuration page

Figure 56 shows the GMRP port configuration page. You can use this page to enable the GMRP port and view the port information.

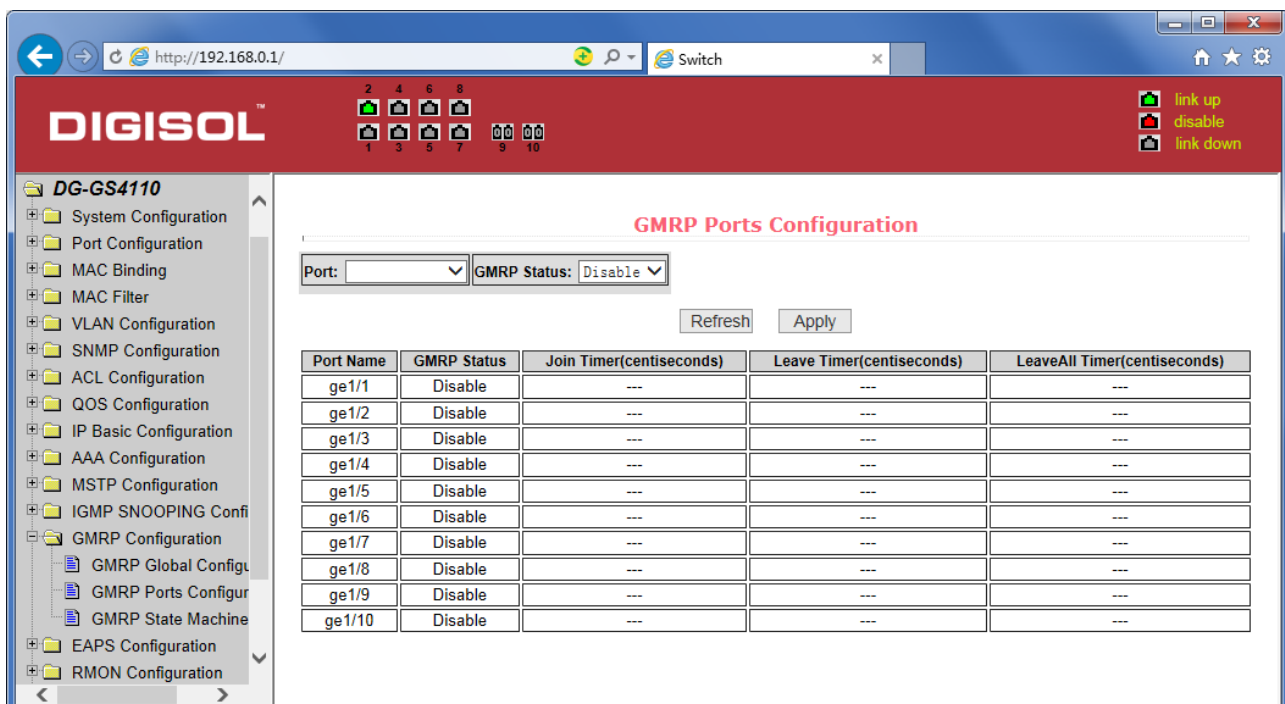


Figure 56 GMRP Port Configuration Page

(3) GMRP state machine page

Figure 57 is the GMRP state machine page. Users can view the GMRP state machine information through this page.

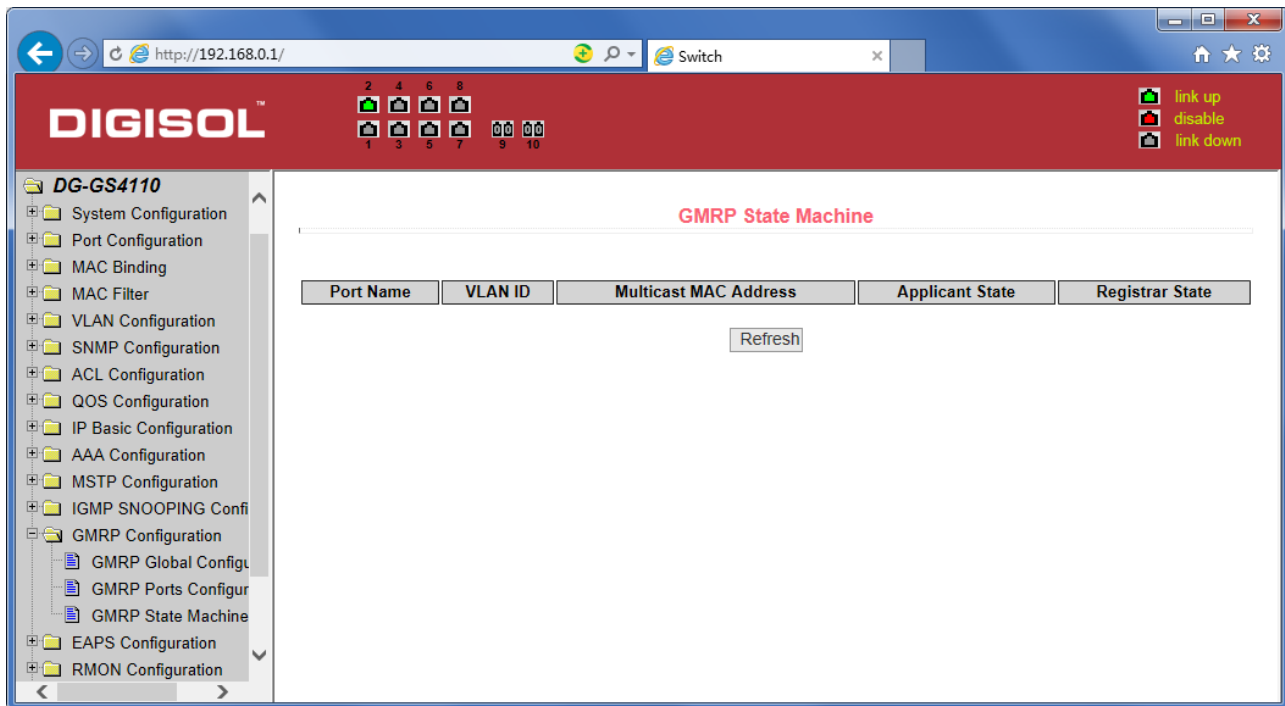


Figure 57 is the GMRP state machine page

14. EAPS configuration

(1) EAPS configuration page

Figure 58 is an EAPS configuration page, through which you can configure some EAPS related information, including:

- Select an EAPS ring number.
- Configure the operating node mode of an EAPS Domain.
- Configure Primary Port of EAPS Domain.
- Configure Secondary Port of EAPS Domain.
- Configure a control VLAN for EAPS Domain.
- Add one or more protected VLANs of the EAPS Domain.
- Configure an EAPS Domain to periodically send HEALTH packets. Hello-timer must be less than fail-time.
- Set the fail-period timer of one EAPS domain to expire.
- Enable or disable compatibility with Extreme devices.

Whether to enable

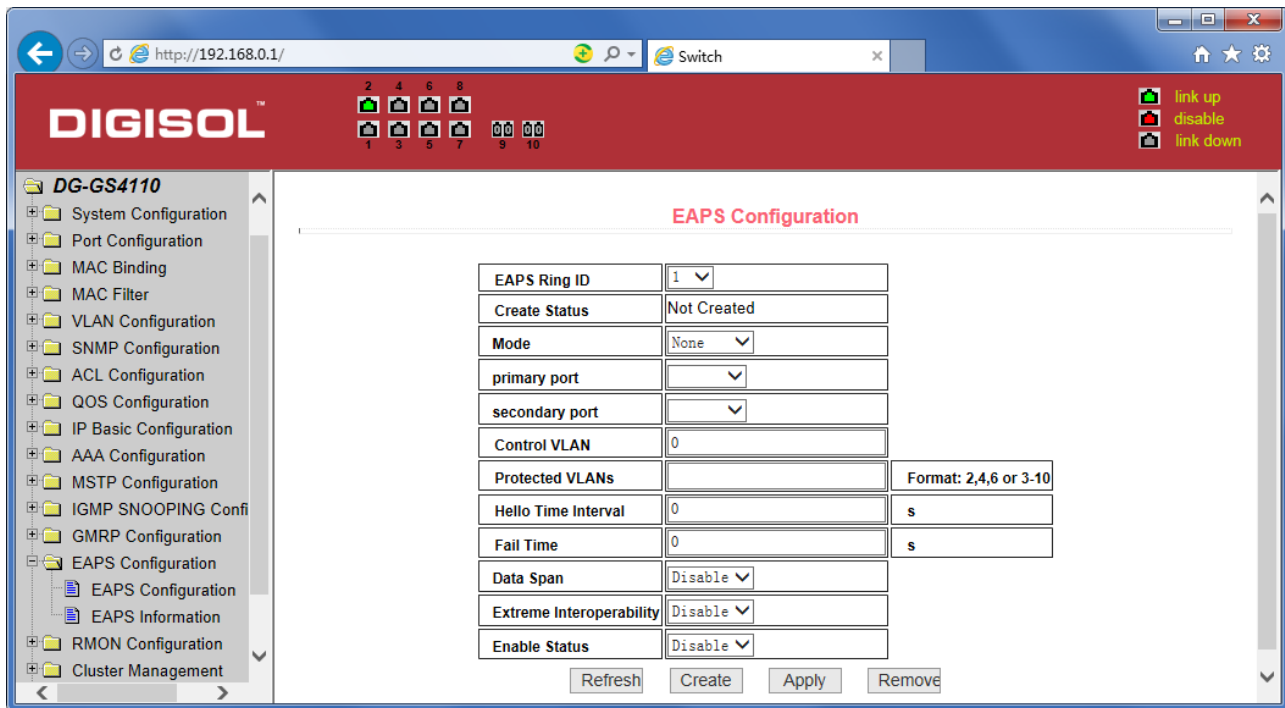


Figure 58 EAPS Configuration Page

(2) EAPS information page

Figure 59 is an EAPS information page, through which users can view some EAPS related information.

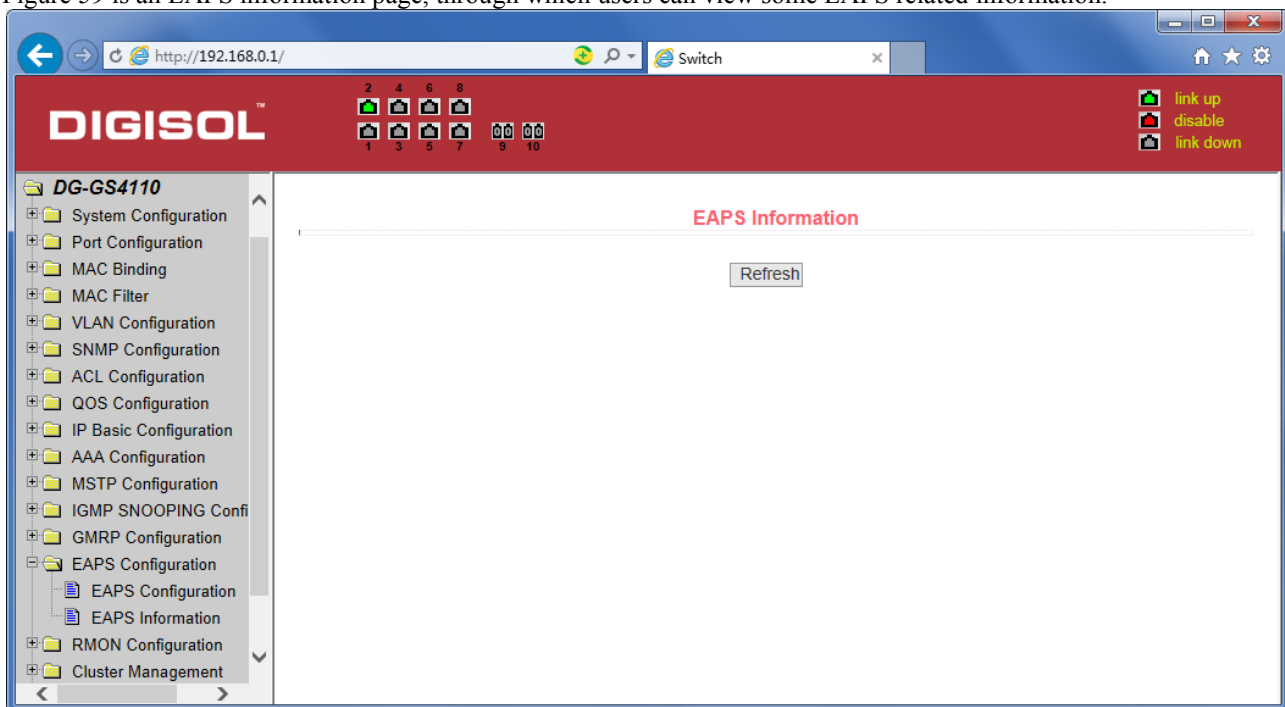


Figure 59 EAPS information page

17 · RMON configuration

(1) RMON statistics group configuration page

Figure 60 shows the RMON statistics group configuration page. You can use this page to configure the RMON statistics group. Select a port from the drop-down list to view/configure the RMON statistics group configuration for this port. When not configured, the index number is 0, fill in the correct index number (range 1 to 100), the owner is optional, you can configure RMON statistics group for the port. The statistics table shows the port statistics from the successful configuration.

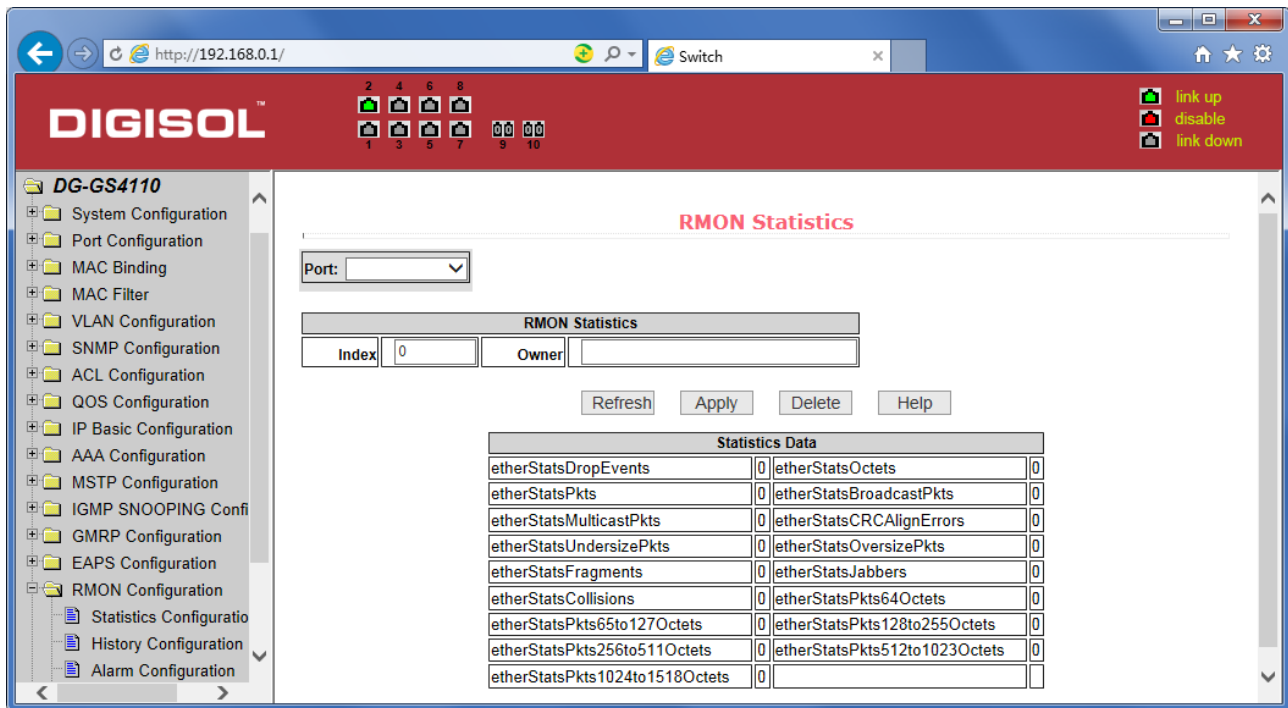


Figure 60 RMON statistics group configuration page

(2) RMON history group configuration page

Figure 62 shows the RMON history group configuration page. You can configure the RMON history group through this page. Select a port from the drop-down list to view/configure the RMON history group configuration for this port. When not configured, the index number is 0, fill in the correct index number (range is 1 to 100), interval, request Buckets, the owner is optional, you can configure the RMON history group for the port. Interval refers to the time interval in seconds that the data is collected. The range is 1-3600. The bucket is the allocated storage size and it indicates how many records are stored. The range is 1-100. The statistics table shows historical data that has been collected since the configuration was successful.


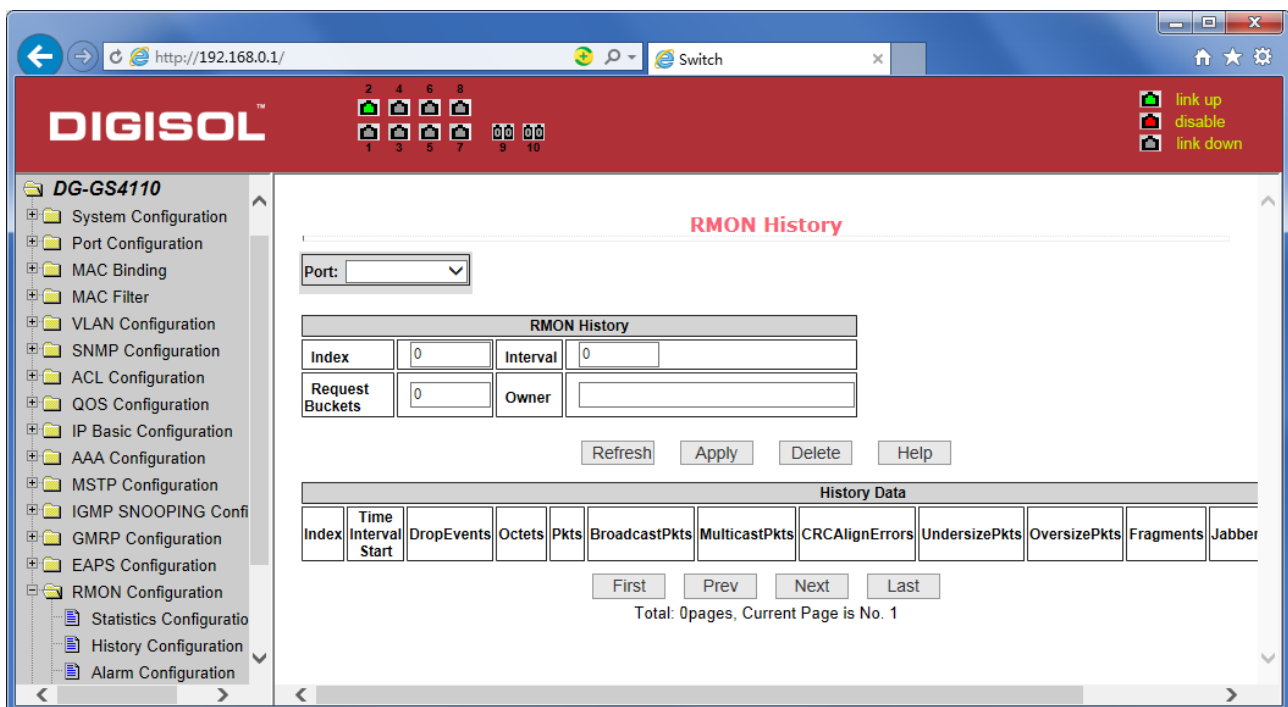


Figure62 RMON history group configuration page

(3) RMON alarm group configuration page

Figure 62 shows the RMON alarm group configuration page. You can use this page to create or modify an RMON alarm group. Select a configured alarm group from the drop-down list to view/configure its information. Select New to create it. The index number range is from 1 to 60, and the interval range is from 1 to 3600. In seconds, the monitoring object must fill in the MIB node. The comparison method can choose absolute (absolute value) or delta (change amount). In addition, the upper and lower limit valves must be filled in. Value, event index, owner is optional. The alarm value is read-only and shows the sampled value when the alarm was last issued. The event index refers to the index number of the RMON event group and must be configured in advance.

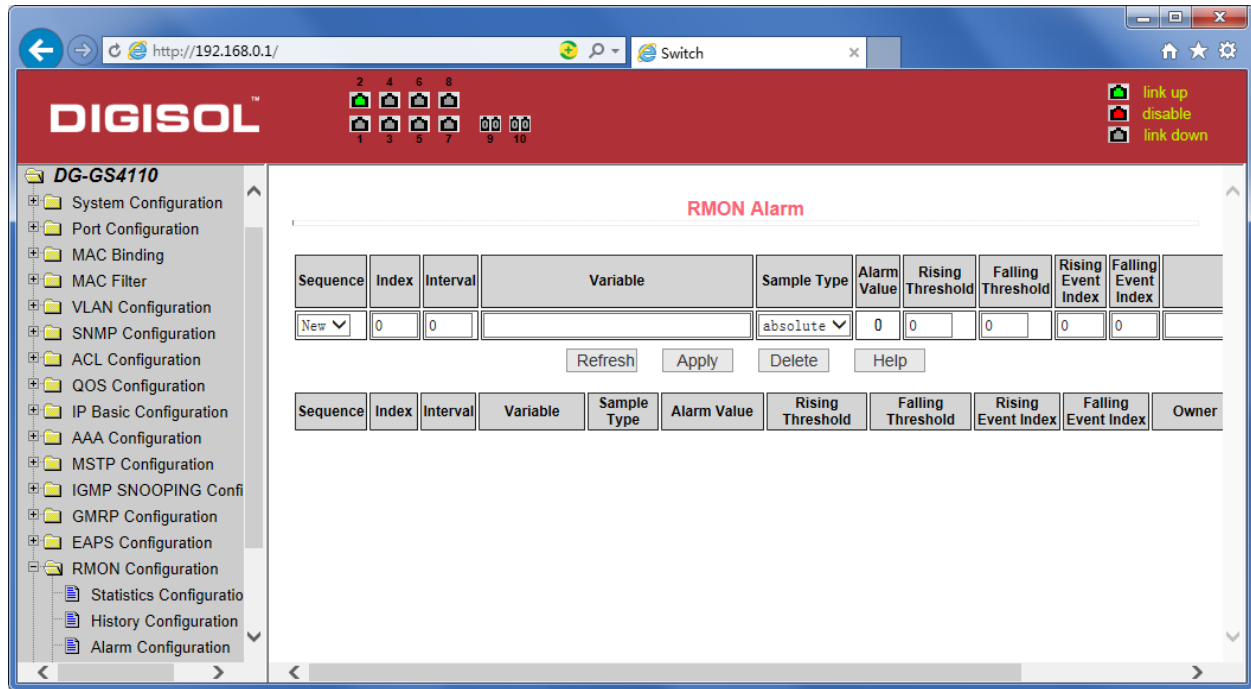

Sequence	Index	Interval	Variable	Sample Type	Alarm Value	Rising Threshold	Falling Threshold	Rising Event Index	Falling Event Index
New	0	0		absolute	0	0	0	0	0

Refresh Apply Delete Help

Figure 62 RMON alarm group configuration page

(4) RMON event group configuration page

Figure 63 is the RMON event group configuration page. Users can create or modify RMON event groups through this page. Select a configured event group from the drop-down list to view/configure its information. Select New to create it. The index number range is from 1 to 60. The description is a character string. Actions can select none (no operation), log (log), snmp-trap (trap trap) or log-and-trap (log and Trap alarm), Community names do not work in this device, owners are optional. The last send time is read-only, showing the last time the event was sent.

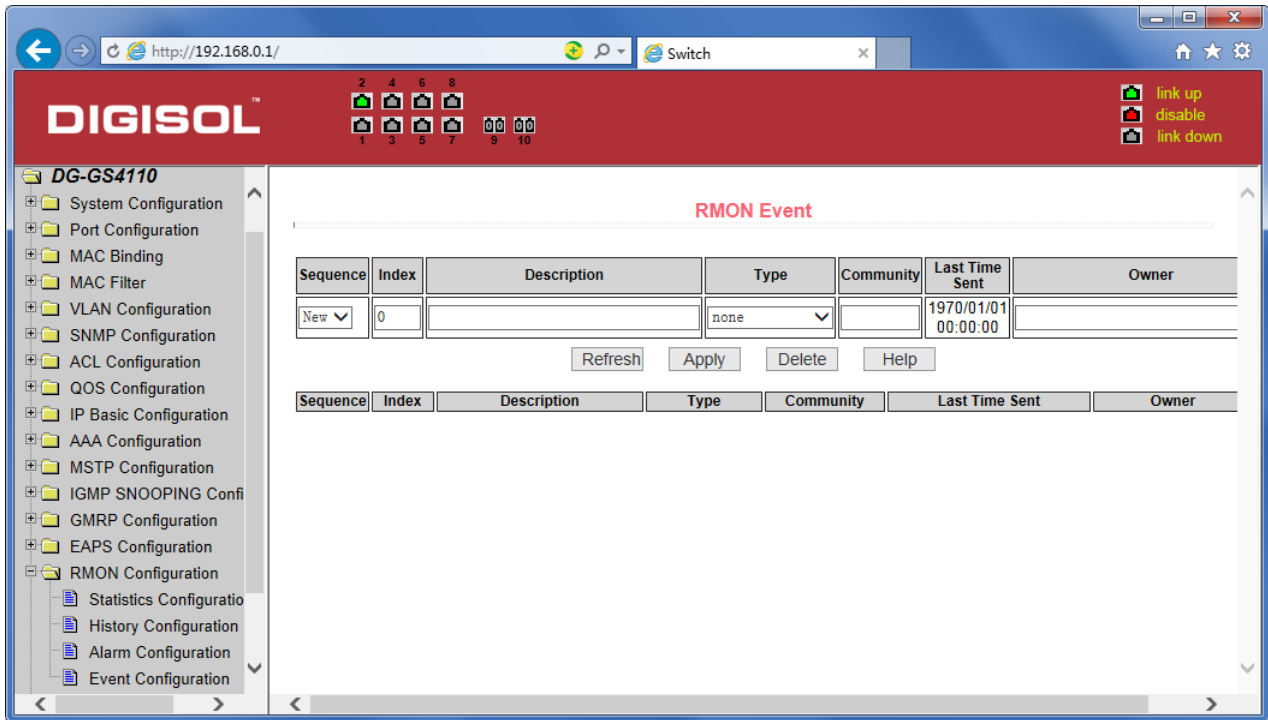


Figure 63 RMON Event Group Configuration Page

18 · Cluster configuration

(1) NDP configuration page

Figure 64 shows the NDP configuration page. You can use this page to configure NDP. The configurable information includes: selecting the port, enabling the NDP function of the port, enabling the global NDP function, the interval for sending NDP packets, and the aging time of the NDP packets on the receiving device.

For port selection, you can select the port as required and enable the port NDP function. For NDP to operate normally, both global and port NDP must be enabled at the same time.

Set the aging time of the NDP packets sent by the local device to the receiving device. The valid time range is 1-4096 seconds. The default value is 180 seconds.

Set the interval for sending NDP packets. The valid time range is 1-4096 seconds and the default is 60 seconds.

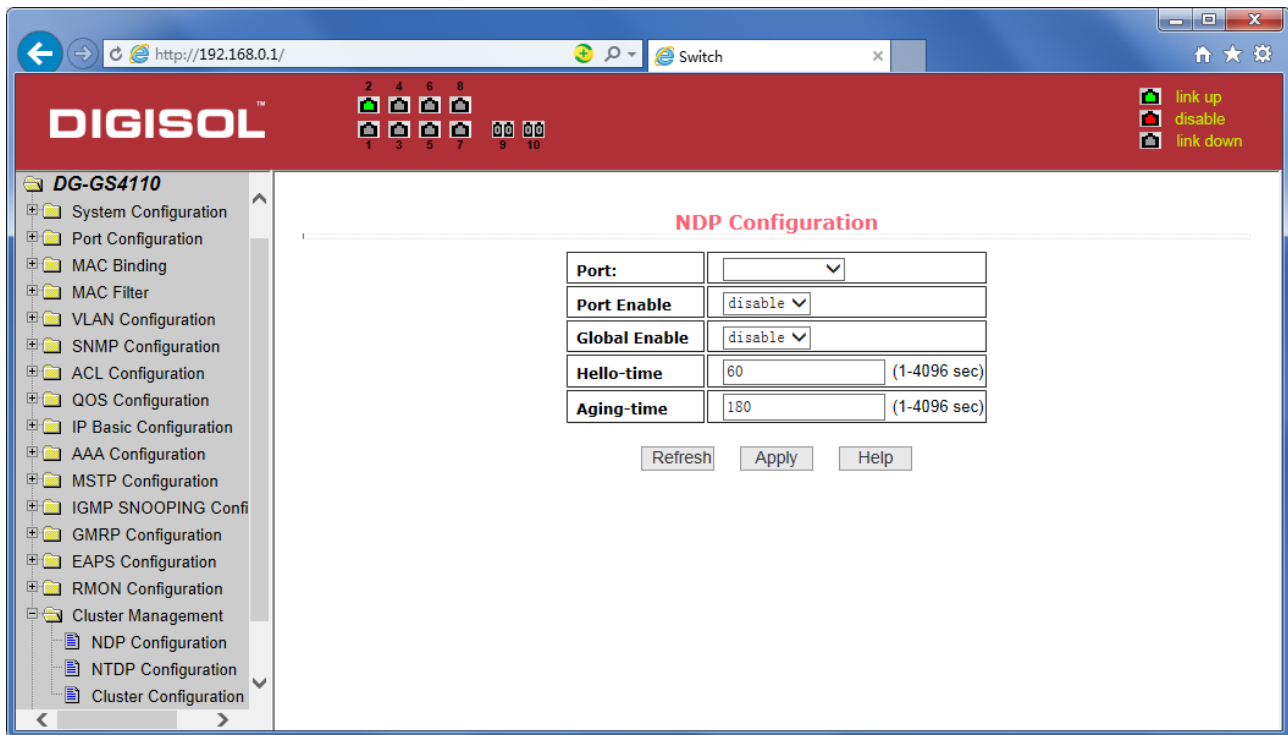


Figure 64 NDP configuration page

(2) NTDP configuration page

Figure 65 shows the NTDP configuration page. You can use this page to configure NTDP. The information that can be set includes: selecting the port, enabling the NTDP function of the port, enabling the global NTDP function, the range of the topology collection, the time interval of collecting the regular topology, the delay time of the first port forwarding the packet, and the forwarding of the packet by other ports delay.

For port selection, you can select the port as required and enable the NTDP function on the port. For NTDP to operate normally, both global and port NTDP must be enabled.

The range of topology collection is configured. The valid range is 1-6. In the default configuration, the maximum number of hops from the most distant device to the topology collection device is 3.

Set the interval for collecting the topology collection. The valid range is 0-65535 minutes. The default configuration is 1 minute.

Set the delay for forwarding packets on the first port. The valid range is 1-1000 milliseconds. The default value is 200 milliseconds.

Sets the delay for forwarding packets on the first port. The valid range is 1 to 100 milliseconds. The default value is 20 milliseconds.

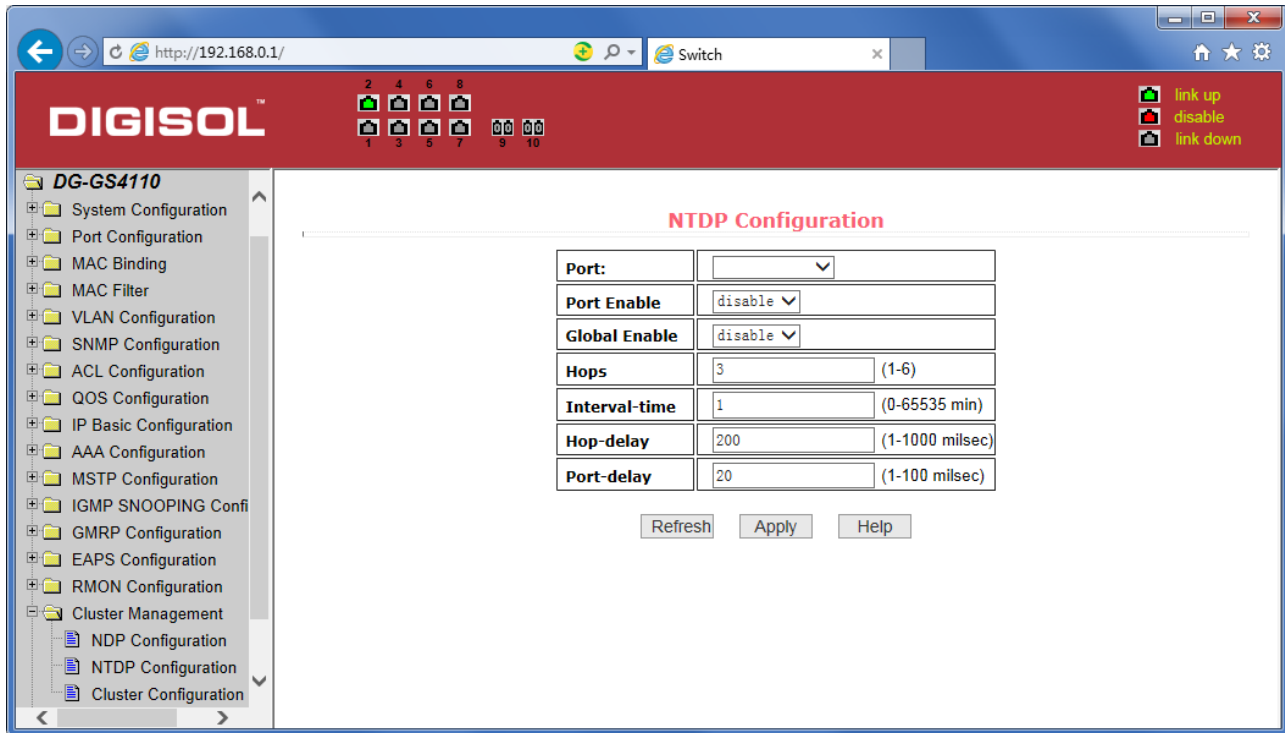


Figure 65 NTDP configuration page

(3) Cluster Configuration Page

Figure 66 is the cluster configuration page. Users can configure the cluster and view the cluster member table through this page. The information that can be set includes: enabling the cluster function, configuring the management VLAN, the address pool of the cluster, the interval for sending handshake packets, the effective retention time of the device, the name of the cluster, the way to join the cluster, and deleting the cluster.

To enable the cluster function, you must enable the cluster function before the cluster function can run normally.

Configure a management VLAN. The valid range is 1-4094. The default configuration is vlan1.

Configure a private IP address range for member devices in the cluster. The valid range of IP addresses is 0.0.0.0 to 255.255.255.255. The valid range of the mask length is 0 to 32.

Set the interval for sending handshake packets. The valid range is 1-255 seconds. The default is 10 seconds.

Configure the device's effective retention time. The valid range is 1-255 seconds and the default is 60 seconds.

To set up a cluster, you need to configure the cluster name and choose to join the cluster. There are manual and automatic joining methods. After establishing a cluster, you can automatically switch to manual, but you cannot manually switch to automatic. Manual mode can change the cluster name.

After a cluster is established, member devices and candidate devices can be viewed in the cluster member table. You can delete member devices or add candidate devices to member devices according to roles.

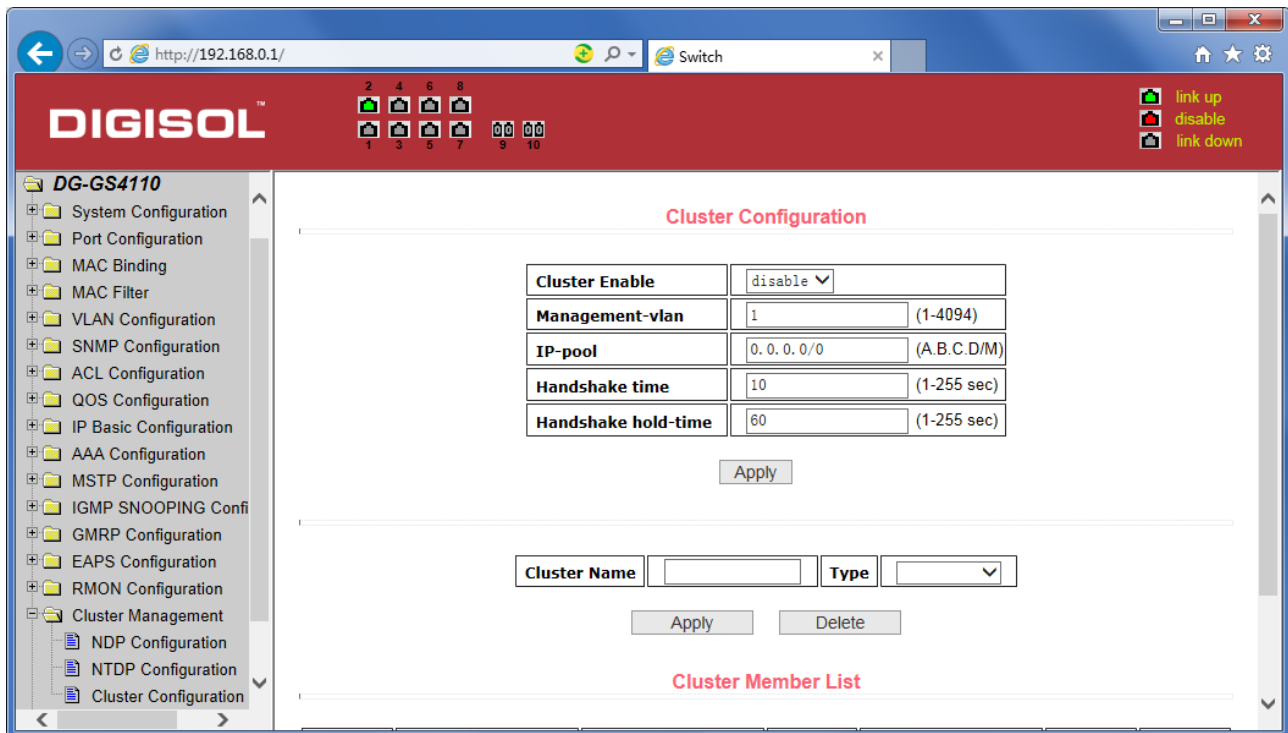


Figure 66 Cluster Configuration Page

19 · log management

(1) Log information page

Figure 67 is the Log information page. Users can enable and view various log information through this page.

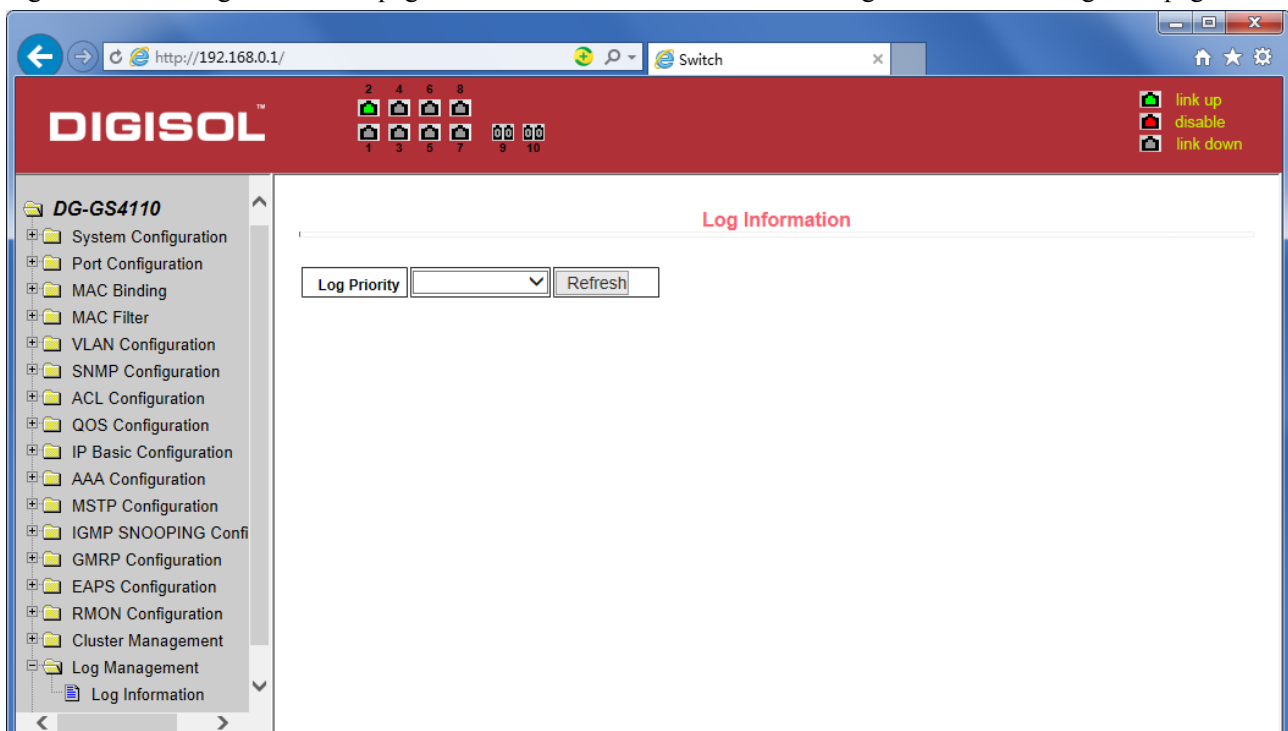


Figure 67 Log Information Page

Critical: output critical level information.

Debugging: Outputs debug level debugging information.

Informational: Output information level debugging information.

Warning: output warning level debugging information.

ALL: output all log information

⌚ sales@digisol.com



Limited Lifetime Warranty

This Product is covered under DIGISOL Limited Lifetime Warranty program backed by DIGISOL Service Center. To avail this Limited Lifetime Warranty offer, customer needs to contact DIGISOL's Technical Assistance Center for the same. You may be asked to provide proof of purchase of product for warranty claim of defective product. Please refer website www.digisol.com for the detailed support terms & conditions and support process.

Warranty Policy

1. **Hardware Warranty :** Hardware warranty period shall be limited up to Three years. External Power Adapter shall carry One year warranty only against manufacturing defects. Any repair or replacement will be rendered by DIGISOL at its Service Center only.
2. **Software Warranty :** DIGISOL issues this Limited Software Warranty that the software portion of the product ("Software") will substantially confirm to DIGISOL's then current functional specifications for the software, as set forth in the applicable documentation, from the date of original retail purchase of the Software for a period of one year ("Software Warranty period"), provided that the Software is properly installed on approved hardware and operated as contemplated in its documentation.
3. **Governing Law:** This warranty shall be governed by Indian Laws.
4. **Limited Lifetime Warranty** shall subject to the terms & conditions specified in the DIGISOL PRODUCT WARRANTY policy displayed on www.digisol.com
5. To avail and activate warranty for your product.
Kindly register your product by calling us @18002093444

SUPPORT

 helpdesk@digisol.com
 **1800 209 3444**

