



STRUCTURED CABLING SYSTEMS


DIGISOL Multi Mode, Multitube Single Sheath Unarmoured Cable

Introduction:-

DIGISOL Multi Mode (OS2) Multitube Unarmoured Cable is a indoor/outdoor cable. It has multi loose tubes having fibers filled with thixotropic jelly to prevent water ingress. Fiber Reinforced Plastic provides better tensile strength and antibuckling properties along with cable flooding compound in interstices of core to prevent water ingress in core. Available in UV HDPE sheath and LSZH sheath.

Key Features:-

- Suitable for Indoor/Outdoor network
- Rodent proof
- UV protection
- Thermoplastic material loose tube
- Core covering Polyester tape with binder
- Excellent water proof layer and moisture resistance
- Excellent Crush resistance performance
- Light weight and Compact structure

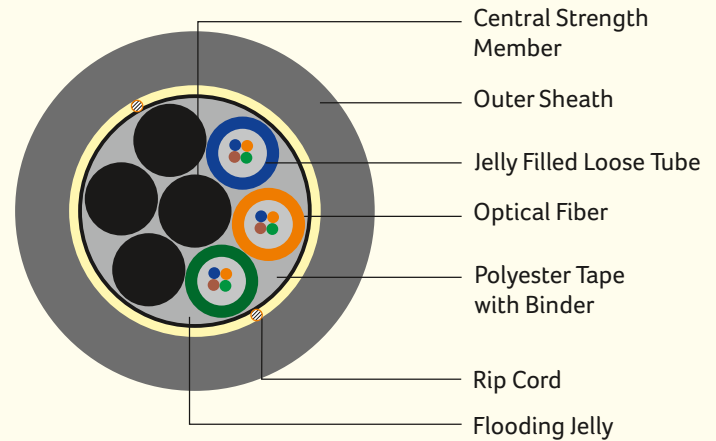

Constructional Specifications:-

Parameters / Fiber Cores	04 F	06 F	08 F	12 F	24 F	48 F	72 F	96 F
Number of Fiber per Tube	02	02	04	04	04	08	12	12
Fiber Colours	* *							
Number of Loose Tube	02	03	02	03	06	06	06	08
Loose Tube Colours	* *							
Number of Fillers	04	03	04	03	00	00	00	00
Loose Tube Internal Diameter	1.2 ± 0.1 mm (PBT)						1.4 ± 0.1 mm (PBT)	
Loose Tube Outer Diameter	1.9 ± 0.1 mm (PBT)						2.1 ± 0.1 mm (PBT)	
Central Strength Member	2.0 ± 0.1 mm (FRP Rod)						2.2 ± 0.1 mm <small>upcoated to 3.3mm</small>	
Moisture Barrier	Flooding Gel							
Core Wrapping	Polyester Tape							
Number of Rip Cords	02 nos (Polyester)							
Outer Sheath Thickness	1.5 mm (Nominal) (HDPE/LSZH Black)							
Cable Diameter (mm)	9.0 ± 0.5					10.5 ± 0.5		12.5 ± 0.5
Cable Weight (kg/km) (HDPE/LSZH)	70.0 ± 10 / 90.0 ± 10					85.0 ± 10 / 100.0 ± 10		120.0 ± 15 / 105.0 ± 10

Fiber colours and Loose tube colours: * *

04 to 96 Fibers: Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Pink, Aqua, Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Pink, Natural

Fillers : Black

Environmental Specifications:-

Storage Temperature : -40 °C to +60 °C
 Installation Temperature : -20 °C to +70 °C
 Operating Temperature : -20 °C to +60 °C

Standards:-

IEC 60793-1 & 60794-1
 ANSI/TIA 568-C.3 & ISO/IEC 11801
 Telecordia GR-20 Core

Ordering Information:-

Part Codes	Description
DGF-CUZZOMSX-YY	DIGISOL ZZZ MULTITUBE, UNARMOURED, SS, Y CORE, XX

Note: X / XX - Sheath Material - H / HDPE, L / LSZH
 YY / Y - Number of fiber cores - 04 / 4, 06 / 6, 08 / 8, 12 / 12, 24 / 24, 48 / 48, 72 / 72, 96 / 96.

Example: DGF-CUM10MSH-24 - DIGISOL MM(OM1), MULTITUBE, UNARMOURED, SS, 24 CORE, HDPE
 DGF-CUM40MSL-06 - DIGISOL MM(OM4), MULTITUBE, UNARMOURED, SS, 6 CORE, LSZH

Mechanical Specifications:-

Parameters	Fiber Core : 04, 06, 08, 12, 24, 48, 72, 96 F	Standards
Tensile Strength	1000 N	IEC 60794-1-2-E1
Crush Resistance	2000 N/100 mm	IEC 60794-1-2-E3
Impact Strength	25 N.m	IEC 60794-1-2-E4
Torsion	± 180°	IEC 60794-1-2-E7
Minimum Bend Radius	20 x D	IEC 60794-1-2-E11

Optical Fiber Specifications:-

Parameters	Fiber Core : 04, 06, 08, 12, 24, 48, 72, 96 F			
Fiber Type	62.5 μm (OM1)	50 μm (OM2)	50 μm (OM3)	50 μm (OM4)
Attenuation (@850 nm)	≤ 3.5 dB/km	≤ 2.7 dB/km	≤ 3.0 dB/km	≤ 3.0 dB/km
Attenuation (@1300 nm)	≤ 1.5 dB/km	≤ 0.8 dB/km	≤ 1.0 dB/km	≤ 1.0 dB/km
Bandwidth (@850 nm)	≥ 200 MHz.km	≥ 500 MHz.km	≥ 1500 MHz.km	≥ 3500 MHz.km
Bandwidth (@1300 nm)	≥ 600 MHz.km	≥ 500 MHz.km	≥ 500 MHz.km	≥ 500 MHz.km
Core Diameter	62.5 ± 2.5 μm	50.0 ± 2.5 μm	50.0 ± 2.5 μm	50.0 ± 2.5 μm
Core Cladding Concentricity Error	≤ 1 μm	≤ 1 μm	≤ 1 μm	≤ 1 μm
Cladding Diameter	125 ± 1 μm	125 ± 1 μm	125 ± 1 μm	125 ± 1 μm
Cladding Non-circularity	≤ 1 %	≤ 1 %	≤ 1 %	≤ 1 %
Coating Diameter	250 ± 15 μm	250 ± 15 μm	250 ± 15 μm	250 ± 15 μm

Cable Size & Standard Length:-

4F to 12F : 4.0 kms ± 10%
 24F to 96F : 2.0 kms ± 10%