



STRUCTURED CABLING SYSTEMS


DIGISOL CCTV 3+1 Standard Cable

Introduction:-

DIGISOL CCTV Standard cable 3+1 is hybrid cable with three power cores for powering of camera and one video core to be used between CCTV camera and control room devices for recording of images

Key Features:-

- CCTV 3+1 hybrid type construction
- Combination of electrical and communication conductors
- Three power cores for powering CCTV cameras
- Video core with Al Alloy braiding for communication with central monitoring and recording devices
- Flame retardant standard cable

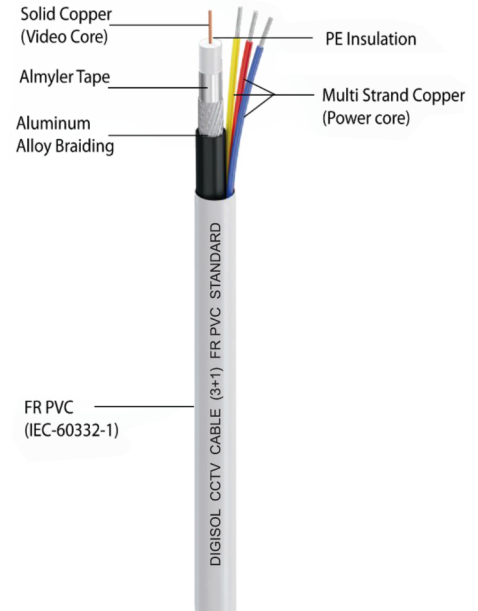

Technical Specifications:-

CCTV cable

Color & Material of Outer Sheath	: FR PVC_White (IEC 60332-1)
Cable Diameter (Oval) MM	: 5.70 +/- 0.30
Jacket Thickness MM	: 0.65 +/- 0.10

COAXIAL Cable

Inner Conductor	: Solid Copper
No. of Conductors	: 1
Dielectric	: HDPE
Color	: Natural
Diameter	: 1.35 +/- 0.10
Thickness	: 0.42 +/- 0.05
Shield - Copper Colour	: Yes
Aluminum Myler Tape	
Shield - Braiding	: Alloy Braiding

Dia. of Braid Wire	: 0.115 +/- 0.01
No. of Braiding Wires	: 48
Coax Jacket	: PVC
Colour	: Black
Thickness	: 0.40 +/- 0.05
III) Insulated Cores	:
Core Colour	: Red, Yellow, Grey

CONDUCTOR

No. of Strands	: 7
Strand Diameter	: 0.14
Insulation	: PVC Type A
Thickness (Average)	: 0.40 +/- 0.05
Diameter (Average)	: 1.20 +/- 0.10

Ordering Information:-

DGC-CC3S4F-9WCS

DIGISOL CCTV 3+1 Standard Cable with Al Alloy braiding 90mtrs

DIGISOL is a Subsidiary of Smartlink Holdings Limited

DIGISOL SYSTEMS LIMITED
 CITIPOINT, 7th Floor,
 Unit No. B-701, B-702 & B-703,
 Andheri-Kurla Road, J. B. Nagar,
 Andheri (East),
 Mumbai - 400059, INDIA

1800-209-3444
 www.digisol.com
 helpdesk@digisol.com

@DIGISOLINDIA

Datasheet Updated: 5th August 2022