



DIGISOL®

WIRELESS AND BROADBAND

DIGISOL 1800Mbps 11ax Wi-Fi 6 Enterprise Outdoor Access Point with SFP Port

DG-WM600-XIT2




Key Features:-

- Upto 1800Mbps Wireless Speed
- Dualband 2.4GHz / 5GHz Frequency
- Wi-Fi 6 802.11ax Standard Support
- TWT (Target Wake up Time)
- SFP Port for Long Distance connection
- IP68 Ingress Protection
- 27dbm Transmit Power
- 32 SSIDs



Introduction:-

DIGISOL DG-WM600-XIT2 is high performance outdoor wireless access point which can support 2.4GHz and 5 GHz band, adopting technologies such as Multi-User Multiple-Input Multiple-Output (MU-MIMO) and orthogonal frequency division multiplexing (OFDM), providing a data transmission rate of at most 575 Mbps in 2.4GHz band and 1200Mbps in 5GHz band. It supports up to 254 concurrent users. With integrated antenna inside, DG-WM600-XIT2 is widely used at outdoor WIFI coverage networks, such as campus, streets, rural area, resorts and scenic spots.

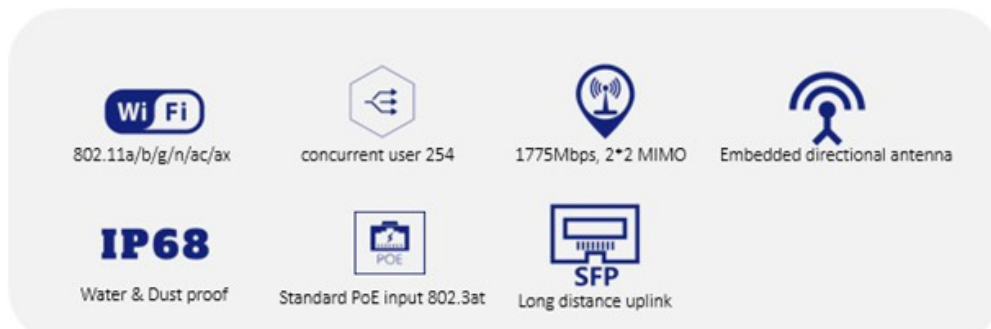

High-level outdoor 802.11ax wireless access

The DG-WM600-XIT2 supports the 802.11ax standard and can operate in 2.4 GHz and 5 GHz both bands. It provides an access bandwidth up to 1.775Gbps, which can connect users up to 254 simultaneously.

Fiber uplink for long-distance connection

Fiber port used as uplink ports, which break through the limitations of the conventional copper port, the distance is no longer a bottleneck.

Operating in a wide temperature range

Thanks to deliberate hardware design and the selection of dedicated components it can operate in a broad temperature range from -40°C to 65°C.

Highest IP68 Anti-dust & water standard

DG-WM600-XIT2 comply IP68 can be deployed in the harshest outdoor environment.

Good PoE compatibility

DG-WM600-XIT2 can work well with the third-part PoE switches that support 802.3at standard.

High-performance RF

The professional optimized design is employed for the RF module of the DG-WM600-XIT2, integrated directional antenna supports 27 dB transmission power which can greatly improve wireless coverage.

Dual-mode fit & fat

DG-WM600-XIT2 can work in fit or fat mode and can flexibly switch between the fit mode and the fat mode according to network planning requirements.



DIGISOL®

WIRELESS AND BROADBAND

Technical Specifications:-

HARDWARE SPECIFICATIONS	
ITEM	DG-WM600-XIT2
Dimensions (L x W x D) (mm)	214 × 214 × 68
Working Frequency	2.4G : 802.11b/g/n/ax
	5G : 802.11a/n/ac/ax
Maximum Data Rate	2.4G : 575Mbps
	5G : 1200Mbps
Physical Port	1 x 10/100/1000Base-T PoE port for uplink
	1 x 1000M SFP fiber port (Combo)
	1 x 10/100/1000Base-T downlink port
	1 build-in M.2 port for IoT and LTE expansion
LED indicator	Yes
Console Port	Yes
Mounting mode	Pole-mounting
PoE	802.3at
Maximum power consumption	< 18W
Antenna type	Internal directional antenna: horizontal 130°, vertical 74°
Antenna gain	2.4G 10dBi, 5G 10dBi
Transmit power	2.4G: 27dBm (Per Chain)
	5G : 27dBm (Per Chain)
	(Note : final output power comply with deployment regulation might be different)
Transmit power adjustment granularity	1 dBm
Working frequency band	802.11b/g/n/ax: 2.4 GHz to 2.483 GHz
	802.11a/n/ac/ac wave 2/ax:
	5.150 ~ 5.350GHz
	5.47 ~ 5.725GHz
	5.725 ~ 5.850GHz
Modulation technology 2	11b : DSS: CCK@5.5/11Mbps, DQPSK@2Mbps, DBPSK@1Mbps
	11a/g : OFDM:64QAM@48/54Mbps,16QAM@24Mbps, QPSK@12/18Mbps, BPSK@6/9Mbps
	11n : MIMO-OFDM: BPSK, QPSK,16QAM,64QAM
	11ac : MIMO-OFDM: BPSK, QPSK,16QAM,64QAM,256QAM
	11ax: MIMO-OFDMA: BPSK, QPSK,16QAM,64QAM,256QAM,1024QAM
Working/Storage temperature	-40°C to +65°C
	-45°C to + 75°C
Working/Storage RH	5% to 95% (non-condensing)
Protection level	IP68



DIGISOL®

WIRELESS AND BROADBAND

Technical Specifications:-

SOFTWARE SPECIFICATIONS		
ITEM	FEATURE	DG-WM600-XIT2
WLAN	Product positioning	Outdoor dual frequency
	Working frequency band	2.4 GHz and 5 GHz
	Bandwidth performance	1775Mbps
	Virtual AP (BSSID)	32
	Concurrent user	254
	Number of spatial streams	2.4G: 2 5G:2
	Dynamic channel adjustment (DCA)	Yes
	Transmit power control (TPC)	Yes
	Blind area detection and repair	Yes
	SSID hiding	Yes
	RTS/CTS	Yes
	RF environment scanning	Yes
	Hybrid access	Yes
	Restriction on the number of access users	Yes
	Link integrity check	Yes
	Accessing control of terminals based on signal strength	Yes
	Forcing terminals to roam based on signal strength	Yes
	Intelligent control of terminals based on airtime fairness	Yes
	High-density application optimization	Yes
802.11ax	Space streams	2.4GHz:2, 5GHz:2
	Frequency band	2.4GHz + 5GHz
	80 MHz bundling	Yes
	1200Mbps (PHY)	Yes
	Frame aggregation (A-MPDU)	Yes
	Frame aggregation (A-MSDU)	Yes
	Maximum likelihood demodulation (MLD)	Yes
	Transmit beamforming (TxBF)	Yes
	Maximum ratio combining (MRC)	Yes
	Space-time block coding (STBC)	Yes
	Low-density parity-check code (LDPC)	Yes
Security	Encryption	64/128 WEP, TKIP, and CCMP encryption
	802.11i	Yes
	Portal authentication	Yes
	WAPI	Yes
	MAC address authentication	Yes
	LDAP authentication	Yes
	PEAP authentication	Yes
	WIDS/WIPS	Yes
	Real time spectrum guard	Yes



DIGISOL

WIRELESS AND BROADBAND

Technical Specifications:-

SOFTWARE SPECIFICATIONS		
ITEM	FEATURE	DG-WM600-XIT2
	Protection against DoS attacks	Anti-DoS for wireless management packets
	Forwarding security	Frame filtering, white list, static blacklist and dynamic blacklist
	User isolation	AP L2 forwarding suppression Isolation between client
	Periodic SSID enabling and disabling	Yes
	Access control of free resources	Yes
	Wireless SAVI	Yes
	ACL	Access control of various data packets such as MAC, IPv4, and IPv6 packets
	Secure access control of Aps	Secure access control of APs, such as MAC authentication, password authentication, or digital certificate authentication between an AP and an AC
	802.11W	Yes, encryption of management frames
Forwarding	IP address setting	Static IP address configuration or dynamic DHCP address allocation
	IPv6 forwarding	Yes
	IPv6 portal	Yes
	Local forwarding	Yes
	Multicast	IGMP snooping
	Roaming	Yes
	AP switching reference	Signal strength, bit error rate, RSSI, S/N, whether neighboring APs are normally operating, etc.
	WDS	Yes
QoS	WMM	Yes
	Priority mapping	Ethernet port 802.1P identification and marking
		Mapping from wireless priorities to wired priorities
	QoS policy mapping	Mapping of different SSIDs/VLANs to different QoS policies
		Mapping of data streams that match with different packet fields to different QoS policies
	L2-L4 packet filtering and flow classification	Yes: MAC, IPv4, and IPv6 packets
	Load balancing	Load balancing based on the number of users
		Load balancing based on user traffic
		Load balancing based on frequency bands
	Bandwidth limit	Bandwidth limit based on APs
		Bandwidth limit based on SSIDs
		Bandwidth limit based on terminals
		Bandwidth limit based on specific data streams
	Call admission control (CAC)	CAC based on the number of users
	Power saving mode	Yes
	Automatic emergency mechanism of APs	Yes
	Intelligent identification of terminals	Yes
	Multicast enhancement	Multicast to unicast



DIGISOL®

WIRELESS AND BROADBAND

Technical Specifications:-

SOFTWARE SPECIFICATIONS		
ITEM	FEATURE	DG-WM600-XIT2
Management	Network management	Centralized management through an AC; both fit and fat modes
	Maintenance mode	Both local and remote maintenance
	Log function	Local logs, Syslog, and log file export
	Alarm	Yes
	Fault detection	Yes
	Statistics	Yes
	Switching between the fat and fit modes	An AP working in fit mode can switch to the fat mode through a wireless AC; An AP working in fat mode can switch to the fit mode through a local control port or Telnet.
	Remote probe analysis	Yes
	Watchdog	Yes
Value added service	Wi-Fi location	For Wi-Fi terminal and tag
	Wi-Fi probe	Yes
	Value added marketing	Support: various apps based on intelligent terminals, advertising push based on location, personalized push of portals
	Value added authentication	WeChat, SMS, QR code, Facebook
	Passenger flow analysis	Yes
	Compatible Controllers	DG-WU6028C / DG-WU2028E / DG-WU8260C

Typical Application




- 802.11ax
- Uplink fiber port
- 802.3at PoE
- IP68
- Concurrent user 254
- Embedded directional antenna

Ordering Information:-

DG-WM600-XIT2: 802.11a/b/g/n/ac/ac wave 2/ax outdoor high-performance AP, 2.4GHz & 5GHz dual band, 1.775Gbps, 2*10/100/1000Base-T GE ports and 1*SFP fiber port, 1xconsole port, 802.3 at PoE, internal 10dBi directional antenna: horizontal 130°, vertical 74°, built-in m.2 interface for IoT and LTE expansion, basic wall and pole mounting kit (Interface waterproof adhesive tape, grounding cable and PoE powersupply module shall be purchased separately)

*Warranty shall be subject to terms and conditions specified in the DIGISOL PRODUCT WARRANTY displayed on the website of the company.

DIGISOL Logos are trademarks and/or registered trademarks of DIGISOL SYSTEMS LIMITED. Other trademarks, product, service and company names mentioned are the property of their respective owners. Information is subject to change without notice. The actual product appearance may differ from the one shown here. © 2023 DIGISOL SYSTEMS LIMITED. All rights reserved.

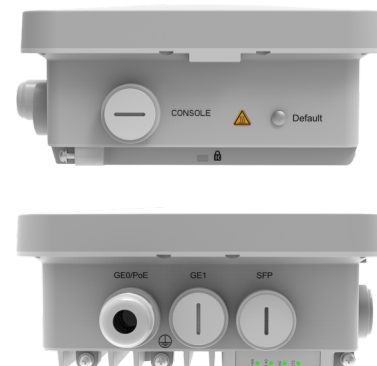

DIGISOL is a Subsidiary of Smartlink Holdings Limited

DIGISOL SYSTEMS LIMITED
CITIPOINT, 7th Floor,
Unit No. B-701, B-702 & B-703,
Andheri-Kurla Road, J. B. Nagar,
Andheri (East),
Mumbai - 400059, INDIA

1800-209-3444
www.digisol.com
helpdesk@digisol.com

@DIGISOLINDIA