



## STRUCTURED CABLING SYSTEMS

### DIGISOL Solid Cable, Cat6 UTP, 4 Pair, 23AWG, Grey



#### Introduction:-

DIGISOL Cat6 4 Pair UTP Cable has been designed for horizontal cabling networks for transmission of high speed data, digital and analog, voice and video signals over LANs. Supports gigabit ethernet (1000 Base-T) standard suitable for noisy environments, high EMI interference surroundings and complies to the requirement of ANSI/TIA-568-C.2 and ISO/IEC 11801. Performance verified upto 250MHz. UL Listed and ETL Verified.

#### Key Features:-

- Better cable material properties and design
- Performance verified upto 250 Mhz.
- Available in FRPVC jacket sheath
- Packaged in an easy-to-pull box for easier installation (305m length)

#### Technical Specifications:-

##### Mechanical Properties:-

Conductor	: 23 AWG, Solid bare copper
Pairs	: 4 Pair twisted wires
Type	: U/UTP CM/CMR rated
Insulation Material	: High density polyethylene (HDPE)
Insulation Diameter	: 0.89 ± 0.01 mm
Insulation Nominal Thickness	: 0.2 mm
Central Member	: PE cross separator
Separator Dimension/Thickness	: 4.3 mm/ 0.4 mm
Separator Material	: Polyolefin / Polyethylene
Jacket Sheath	: FRPVC
Jacket Average Thickness	: 0.5 ± 0.01 mm
Jacket Diameter	: 5.6 ± 0.2 mm
Rip Cord	: 1 no
Jacket Colour	: Grey

##### Mechanical Properties:-

Maximum Tensile Strength of Jacket (N/mm <sup>2</sup> )	: 13.1
Pulling Force	: 11.5 Kg (25.35 lbs)
Bending radius	: <4 x Cable Diameter at -20 ± 1

##### Environmental Properties:-

Operating Temperature	: -20°C to +70°C
Installation Temperature	: -20°C to +70°C

##### Electrical Properties:-


Conductor Resistance	: ≤ 9.38 Ω/100m Max.
Mutual Capacitance	: < 5.6 nF/100m Max
Resistance Unbalance	: 5% Max
Capacitance Unbalance	: Max. 330 pF/100m
Dielectric Strength	: 2.5 KVDC for 2 seconds
Delay Skew	: < 45ns
Impedance	: 100 ± 15 Ω @ 100 Mhz
Current Rating	: 1.5 A Max.
Operating Voltage	: 72 V

##### Color Code:-

Pair Number	: Color
1 - 2	: White-Orange Stripe and Orange
3 - 6	: White-Green Stripe and Green
4 - 5	: White-Blue Stripe and Blue
7 - 8	: White-Brown Stripe and Brown

##### Standards

- UL Listed
- ETL Verified to ANSI/TIA-568-C.2
- ISO/IEC 11801
- RoHS Compliant

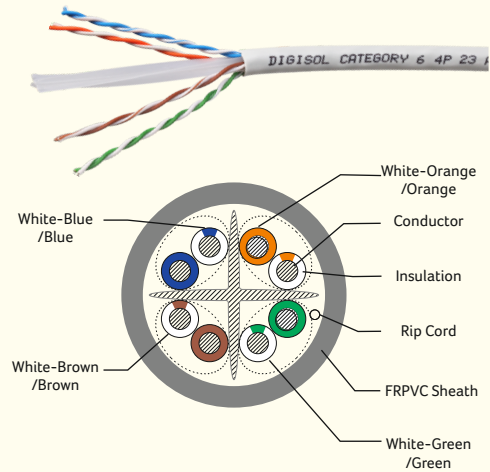

#### Electrical Performance Parameters:- @ 250 MHz

Frequency MHz	Insertion Loss (dB/100m)	RL (dB)	NEXT (dB)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT (dB)	ACR (dB)	PSACR
250	32.8	17.3	38.3	36.3	19.8	16.8	5.5	3.5

#### Ordering Information:-

DGC-SC6U4F-3GB	DIGISOL Solid Cable, Cat6 UTP, 4 Pair, 23AWG, FRPVC CM, Grey, 305m
DGC-SC6U4F-1GB	DIGISOL Solid Cable, Cat6 UTP, 4 Pair, 23AWG, FRPVC CM, Grey, 100m

DIGISOL is a Subsidiary of Smartlink Holdings Limited

**DIGISOL SYSTEMS LIMITED**  
 215 Atrium Bldg., 2nd Floor,  
 B-Wing, Opp. Big Cinema,  
 Courtyard Marriott Compound,  
 Andheri-Kurla Road,  
 Andheri (E), Mumbai - 400093.

- 1800-209-3444
- www.digisol.com
- helpdesk@digisol.com