


[HOW TO CONFIGURE YOUR DG-HR3420 FOR 3G/4G INTERNET](#)

STEP 1: ACCESSING THE WEB CONFIGURATION PAGE

Login to the router configuration page by typing <http://192.168.1.1> in a web browser. We recommend this one time configuration to be done using [Internet Explorer](#).

Enter the username as [admin](#) and password as [1234](#) and click on Login

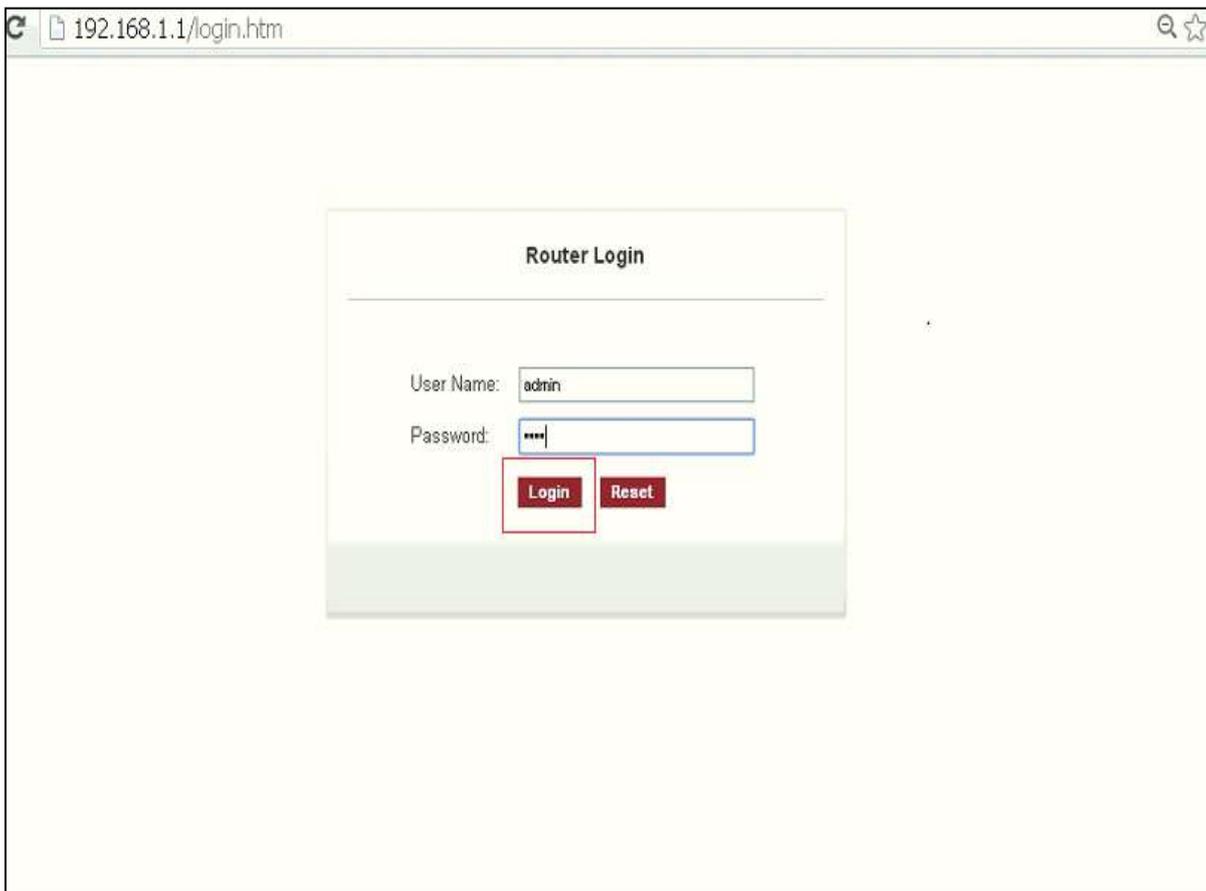

STEP 2: CONFIGURE THE ROUTER IN 3G MODE

Click on [Setup](#) > [WAN](#)

Under [WAN](#) > [3G](#)

Under [3G Settings](#) > Check the 3G Signal and the card status shown on the screen.

Enter [APN](#) as per the ISP (Eg: APN for Jio is jionet)


Enter the dial number *99#

Click on [Apply Changes](#)

Status	Wizard	Setup	Advanced	Service	Firewall	Maintenance
WAN		3G Settings This page is used to configure the parameters for your 3G network access.				
> WAN		3G Signal & Card Status:  Connected Refresh				
> 3G		3G WAN: <input type="radio"/> Disable <input checked="" type="radio"/> Enable				
LAN		PIN Code: <input type="text"/>				
Wireless		APN: <input type="text"/>				
		Dial Number: <input type="text" value="*99#"/>				
		Authentication: <input type="text" value="auto"/>				
		User Name: <input type="text"/>				
		Password: <input type="text"/>				
		Connection Type: <input type="text" value="persistent"/>				
		Idle Time(min): <input type="text" value="0"/>				
		NAPT: <input type="radio"/> Disable <input checked="" type="radio"/> Enable				
		Default Route: <input type="radio"/> Disable <input checked="" type="radio"/> Enable				
		MTU: <input type="text" value="1500"/>				
		IP Type: <input type="text" value="IPv4"/>				
		3G to Wired switch time(s): <input type="text" value="10"/>				
		VID/PID: 0x2020/0x2033				
		Apply Changes Reset				

STEP 3: CHECKING INTERNET ACCESS

If you are successfully connected to the internet, you will get numbers like 26.42.145.143 etc Under [WAN 3G](#) > Inside the [IP Address](#) and [Gateway](#) sections.

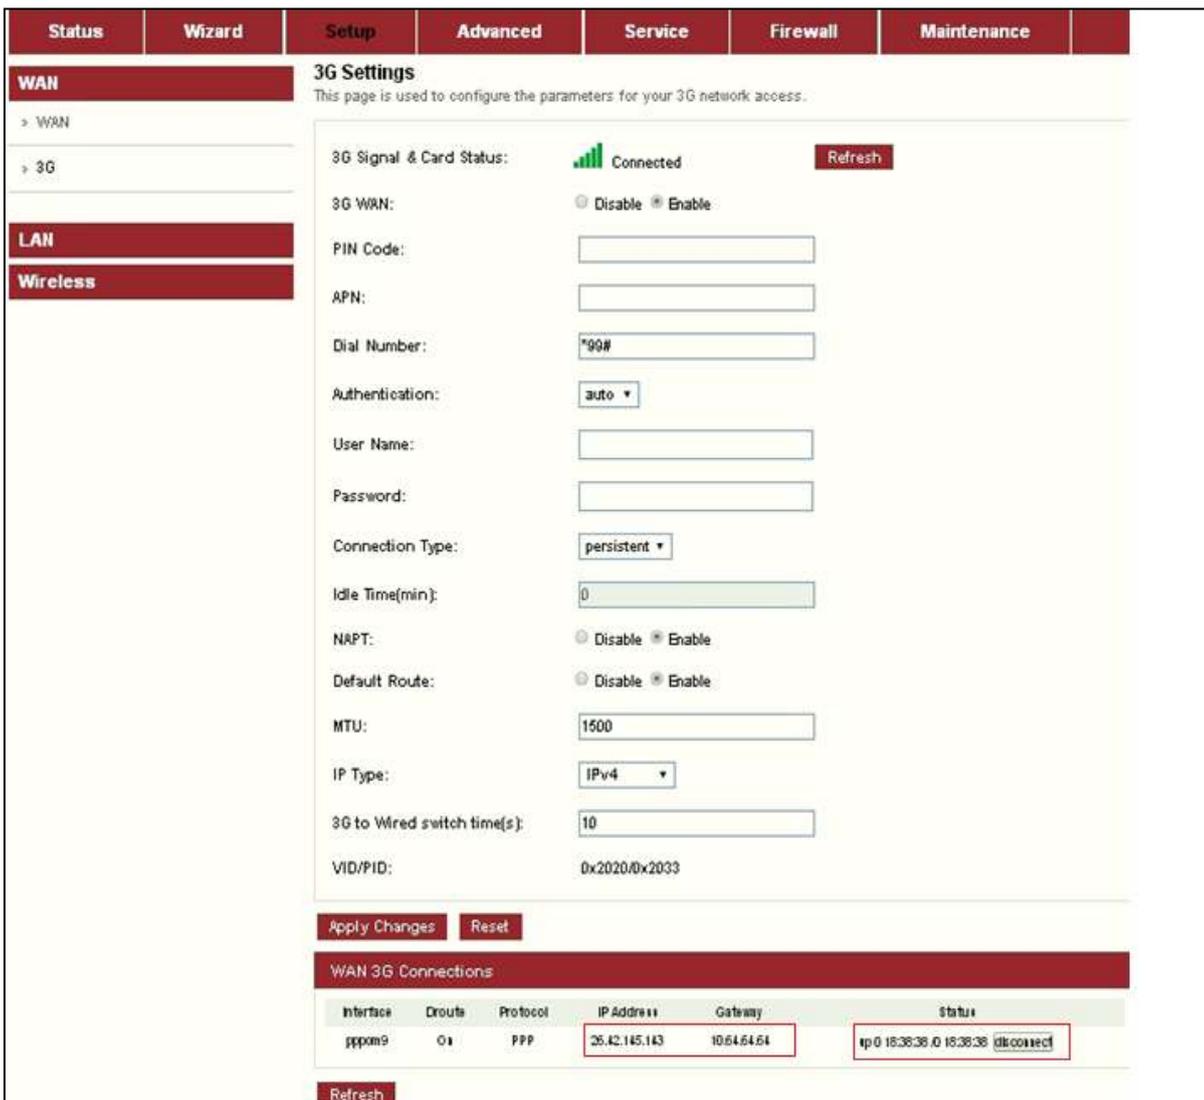

3G Settings
This page is used to configure the parameters for your 3G network access.

3G Signal & Card Status:  Connected [Refresh](#)

3G WAN: Disable Enable

PIN Code:

APN:

Dial Number:

Authentication:

User Name:

Password:

Connection Type:

Idle Time(min):

NAPT: Disable Enable

Default Route: Disable Enable

MTU:

IP Type:

3G to Wired switch time(s):

VID/PID:

[Apply Changes](#) [Reset](#)

WAN 3G Connections

Interface	Route	Protocol	IP Address	Gateway	Status
gppan9	0	PPP	26.42.145.143	10.64.64.64	ip 0 18:38:38.0 18:38:38 disconnect

[Refresh](#)

*** Please note that most of the compatible dongles will auto-connect without having to configure any settings.

You have now configured [DG-HR3420](#) in [3G](#) mode successfully.