

[HOW TO CONFIGURE YOUR DG-HR3400 FOR INTERNET ACCESS](#)

STEP 1: ACCESSING THE WEB CONFIGURATION PAGE INSIDE THE ROUTER

Open the configuration page of the router by typing <http://192.168.2.1> in a web browser. We recommend this one time configuration to be done using [Internet Explorer](#).

Enter the username as [admin](#) and password as [1234](#) and click on Login




STEP 2: CONFIGURE THE ROUTER IN PPPOE MODE

Click on [Setup > Internet Setup](#)

Under [WAN Interface](#) > Select WAN Access type as [PPPoE](#)

Enter [username](#) and [password](#) provided by the ISP



The screenshot shows the configuration page for the DIGISOL DG-HR3400 300Mbps Wireless Broadband Router. The browser window is titled "DG-HR3400 - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/index.htm". The page has a navigation menu with tabs for Setup, Wireless, Advanced, Maintenance, Status, and Help. The "Setup" tab is active, and the "Internet Setup" option is selected in the left sidebar. The main content area is titled "WAN Interface Setup" and contains the following configuration options:

- WAN Access Type:** A dropdown menu set to "PPPoE".
- User Name:** An empty text input field.
- Password:** An empty password input field.
- Service Name:** An empty text input field with a note: "(Optional. It should be consistent with the setting of PPPoE Server or empty.)"
- MTU Size:** A text input field set to "1492".
- Connection Type:** A dropdown menu set to "Continuous", with "connect" and "disconnect" buttons below it.
- Attain DNS Automatically:** A checked radio button with a note: "(Need to repair the connection of your PC if DNS configuration changed.)"
- Set DNS Manually:** An unchecked radio button.
- DNS Server 1:** A text input field set to "0.0.0.0".
- DNS Server 2:** A text input field set to "0.0.0.0".
- DNS Server 3:** A text input field set to "0.0.0.0".

On the right side of the page, there is a "Helpful Hints..." section with the following text:


When configuring the router to access the Internet, be sure to choose the correct [Access Type](#) from the list below.

Please take care when entering your [User name](#) and [password](#) as these are case sensitive. The majority of connection issues are caused by incorrect [User name](#) or [password](#) combinations.

[More...](#)

Under [MAC Clone](#) > Select [MAC From PC](#)

Click on [Apply Changes](#)

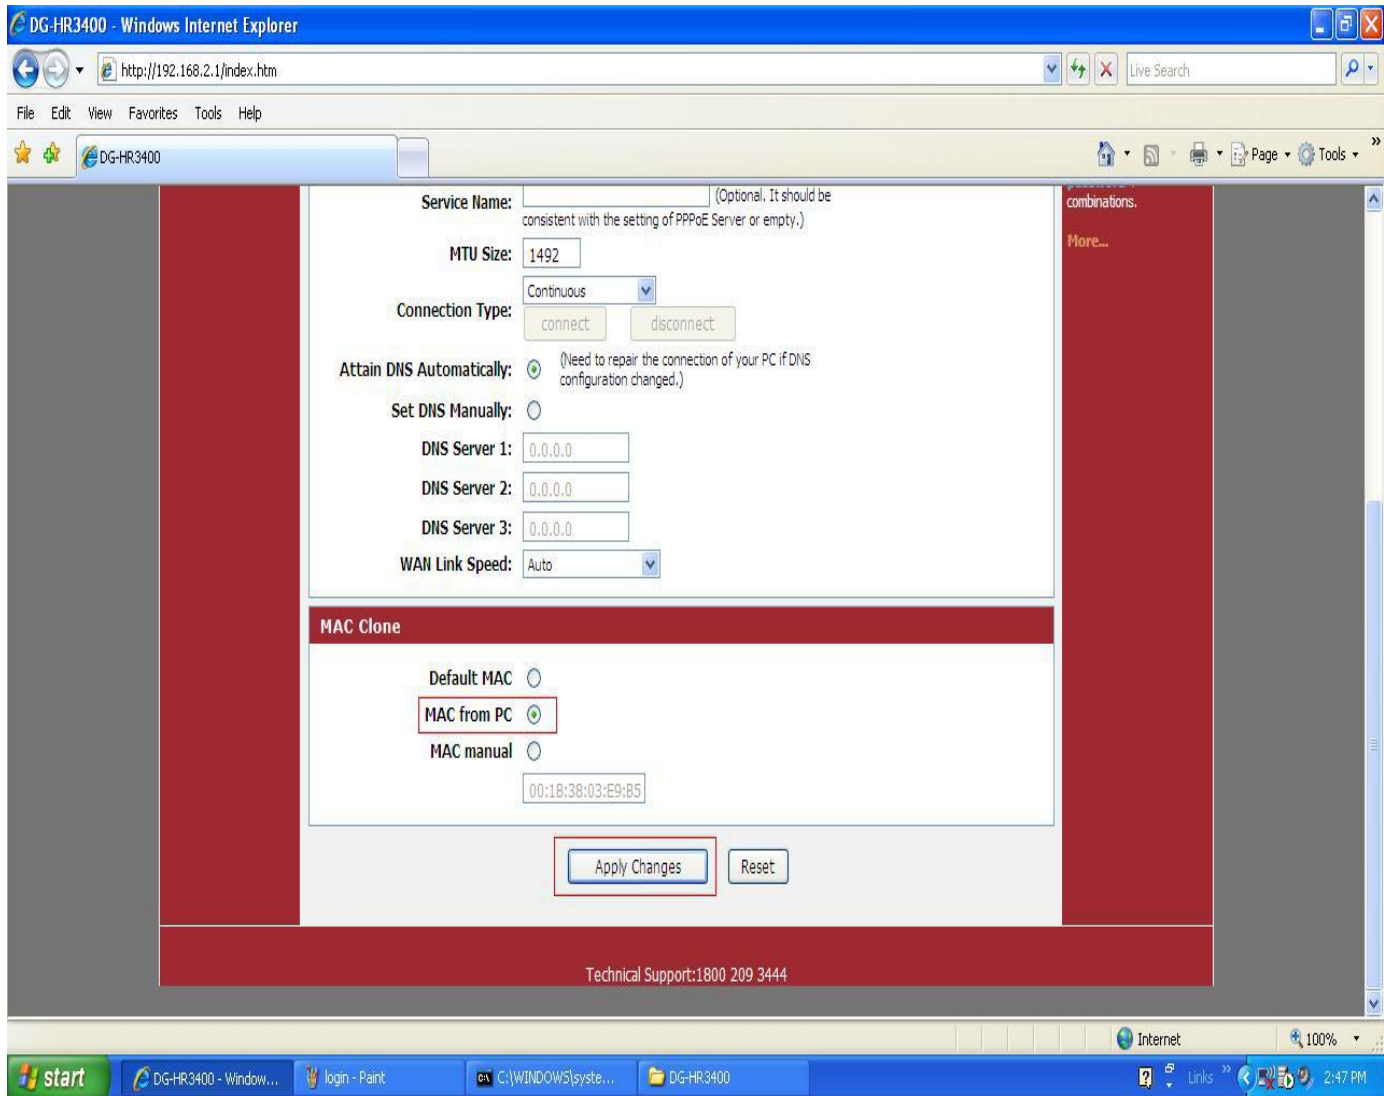

The screenshot shows the web interface of a DG-HR3400 device. The browser window is titled "DG-HR3400 - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/index.htm". The main content area is divided into two sections: "Service Name" and "MAC Clone".

Service Name: (Optional. It should be consistent with the setting of PPPoE Server or empty.)

MTU Size: 1492

Connection Type: Continuous (dropdown menu). Buttons: connect, disconnect.

Attain DNS Automatically: (Need to repair the connection of your PC if DNS configuration changed.)

Set DNS Manually:

DNS Server 1: 0.0.0.0

DNS Server 2: 0.0.0.0

DNS Server 3: 0.0.0.0

WAN Link Speed: Auto (dropdown menu)

MAC Clone

Default MAC:

MAC from PC: (This option is highlighted with a red box in the image.)

MAC manual:


MAC address field: 00:18:38:03:E9:85

Buttons: Apply Changes (highlighted with a red box), Reset.

Technical Support: 1800 209 3444

STEP 3: CHECKING INTERNET ACCESS

Click [Status > Device Info >](#) If you are successfully connected to the internet, you will get numbers like 114.35.54.56 etc Under [WAN Configuration >](#) Inside the [IP Address](#) and [Gateway](#) sections.

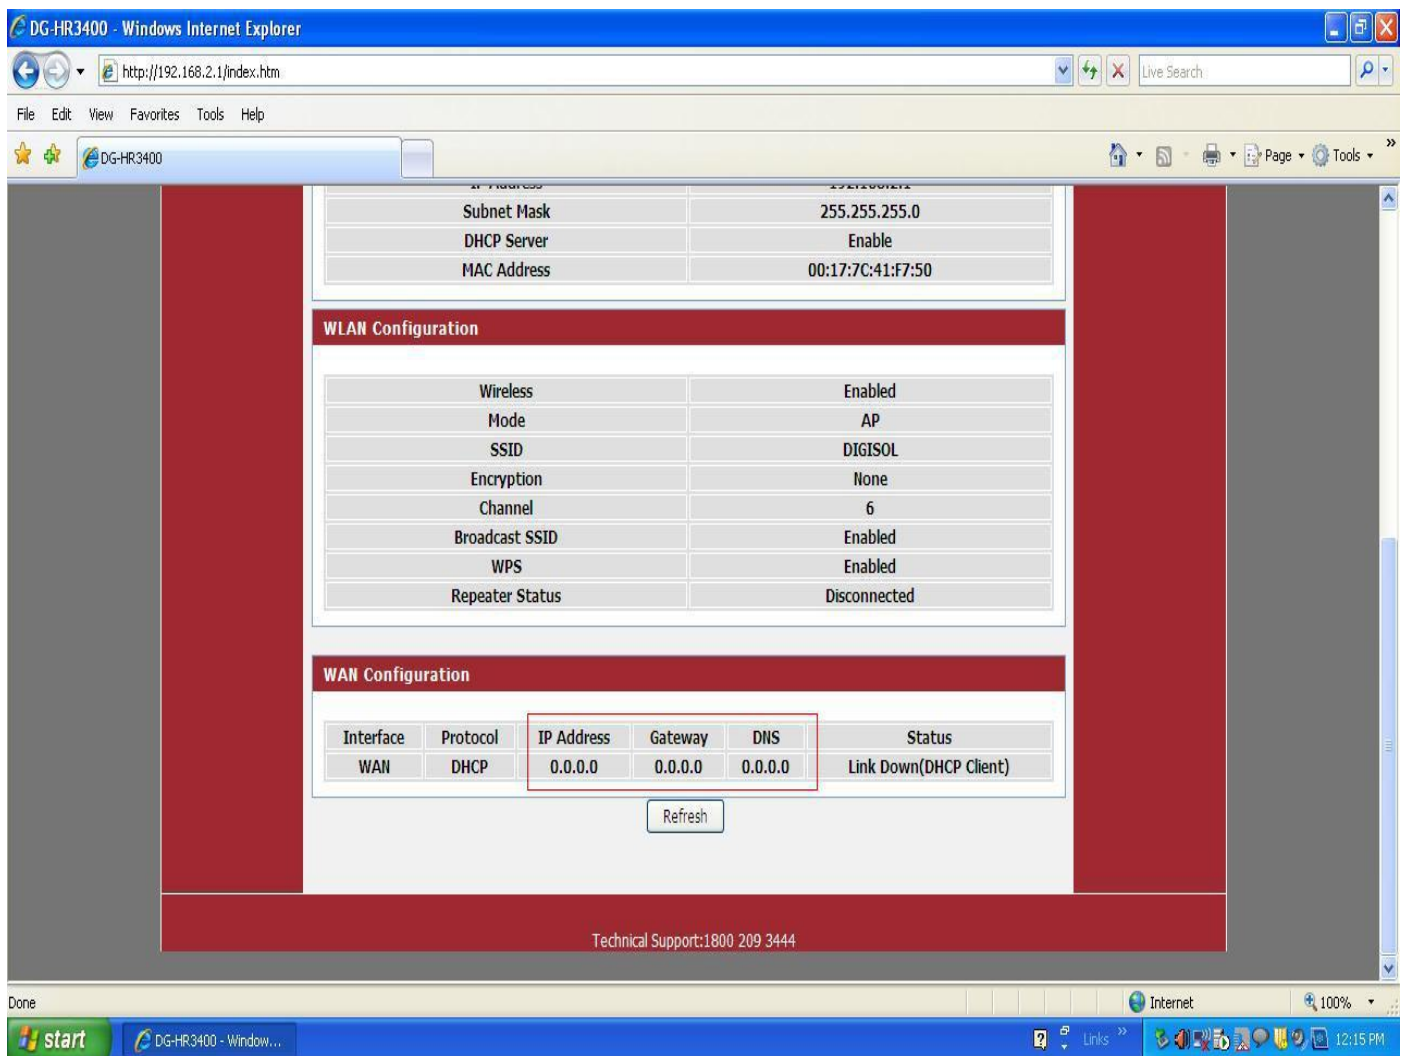

The screenshot shows the configuration page for a DG-HR3400 router. The browser address bar shows the URL <http://192.168.2.1/index.htm>. The page content includes the following configuration sections:

Subnet Mask	255.255.255.0
DHCP Server	Enable
MAC Address	00:17:7C:41:F7:50

WLAN Configuration

Wireless	Enabled
Mode	AP
SSID	DIGISOL
Encryption	None
Channel	6
Broadcast SSID	Enabled
WPS	Enabled
Repeater Status	Disconnected

WAN Configuration

Interface	Protocol	IP Address	Gateway	DNS	Status
WAN	DHCP	0.0.0.0	0.0.0.0	0.0.0.0	Link Down(DHCP Client)

Refresh

Technical Support:1800 209 3444

Now verify the internet access through DG-HR3400 router.