

[HOW TO CONFIGURE DG-HR1400 FOR INTERNET ACCESS](#)

STEP 1: ACCESSING THE WEB CONFIGURATION PAGE INSIDE THE ROUTER

Open the configuration page of the router by typing <http://192.168.2.1> in a web browser. We recommend this one time configuration to be done using [Internet Explorer](#).

Enter the username as [admin](#) and password as [1234](#) and click on Login.




STEP 2: CONFIGURE THE ROUTER IN STATIC IP MODE

Click on [Setup > Internet Setup](#).

Under [WAN Interface > Select WAN Access Type](#) as [Static IP](#).


Enter IP Address, Subnet Mask, Default Gateway and [DNS Server 1](#) and [DNS Server 2](#) provided by the ISP.

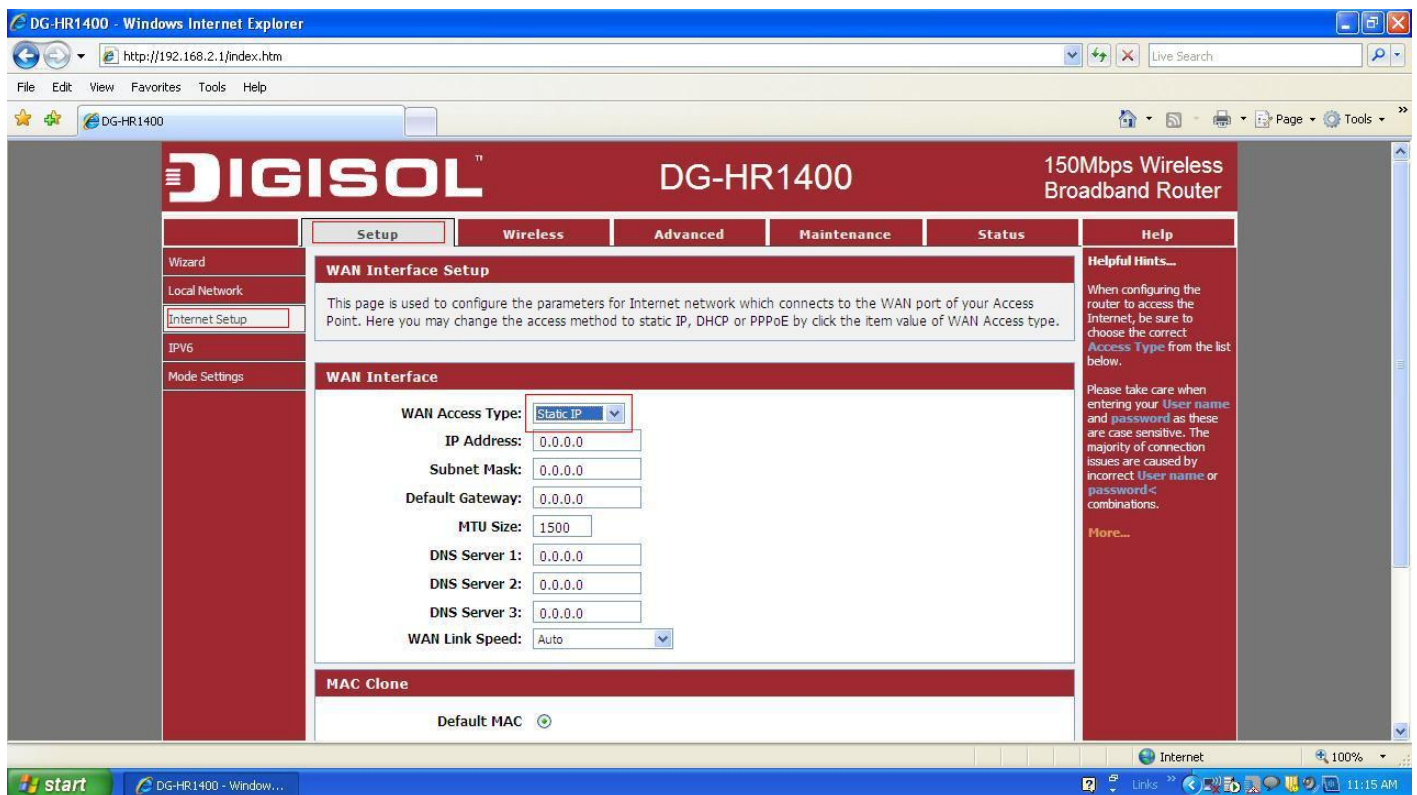

The screenshot shows the configuration page for the DIGISOL DG-HR1400 router. The browser window is titled "DG-HR1400 - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/index.htm". The router's web interface has a red header with the DIGISOL logo and the model name "DG-HR1400 150Mbps Wireless Broadband Router". The "Setup" tab is selected, and the "WAN Interface Setup" section is active. The "WAN Access Type" is set to "Static IP". The "IP Address", "Subnet Mask", "Default Gateway", "DNS Server 1", "DNS Server 2", and "DNS Server 3" fields are all set to "0.0.0.0". The "MTU Size" is set to "1500" and the "WAN Link Speed" is set to "Auto". The "MAC Clone" section shows "Default MAC" with a radio button selected. A "Helpful Hints..." sidebar is visible on the right.

Under [MAC Clone](#) > Select [MAC From PC](#).

Click on [Apply Changes](#).

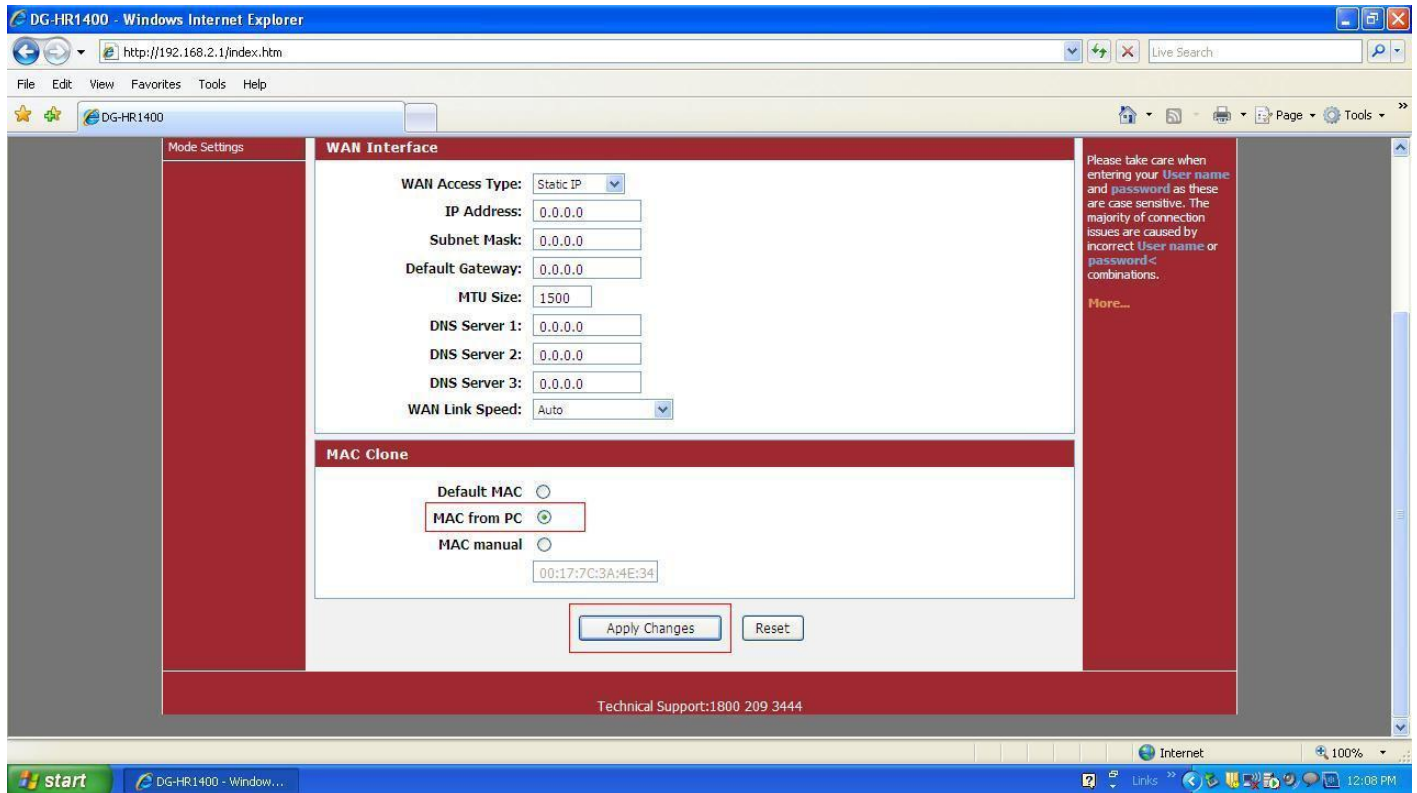

The screenshot shows the configuration page for the WAN Interface of a DG-HR1400 device. The page is displayed in Internet Explorer. The configuration is as follows:

- WAN Access Type:** Static IP
- IP Address:** 0.0.0.0
- Subnet Mask:** 0.0.0.0
- Default Gateway:** 0.0.0.0
- MTU Size:** 1500
- DNS Server 1:** 0.0.0.0
- DNS Server 2:** 0.0.0.0
- DNS Server 3:** 0.0.0.0
- WAN Link Speed:** Auto

The **MAC Clone** section has the following options:

- Default MAC
- MAC from PC
- MAC manual

The MAC address field shows 00:17:7C:3A:4E:34. The **Apply Changes** button is highlighted with a red box. A warning message on the right side of the page reads: "Please take care when entering your User name and password as these are case sensitive. The majority of connection issues are caused by incorrect User name or password combinations. More..."

STEP 3: CHECKING INTERNET STATUS

Click [Status > Device Info](#).

If you are successfully connected to the internet, you will get numbers like 114.35.54.56 etc under [WAN Configuration](#) inside the [IP Address](#) and [Gateway](#) section with [Protocol](#) displayed as [Static IP](#).



The screenshot shows the web interface of a DG-HR1400 router. The browser window is titled "DG-HR1400 - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/index.htm". The interface displays the following configuration sections:

IP Address	192.168.2.1
Subnet Mask	255.255.255.0
DHCP Server	Enable
MAC Address	00:17:7C:3A:4E:33

WLAN Configuration

Wireless	Enabled
Mode	AP
SSID	DIGISOL
Encryption	None
Channel	6
Broadcast SSID	Enabled
WPS	Enabled
Repeater Status	Disconnected

WAN Configuration

Interface	Protocol	IP Address	Gateway	DNS	Status
WAN	DHCP	0.0.0.0	0.0.0.0	0.0.0.0	Link Down(DHCP Client)

Technical Support:1800 209 3444

Now verify the internet access through DG-HR1400 router.