


[HOW TO CONFIGURE YOUR DG-HR3400 FOR INTERNET ACCESS](#)

STEP 1: ACCESSING THE WEB CONFIGURATION PAGE INSIDE THE ROUTER

Open the configuration page of the router by typing <http://192.168.2.1> in a web browser. We recommend this one time configuration to be done using [Internet Explorer](#).

Enter the username as [admin](#) and password as [1234](#) and click on Login

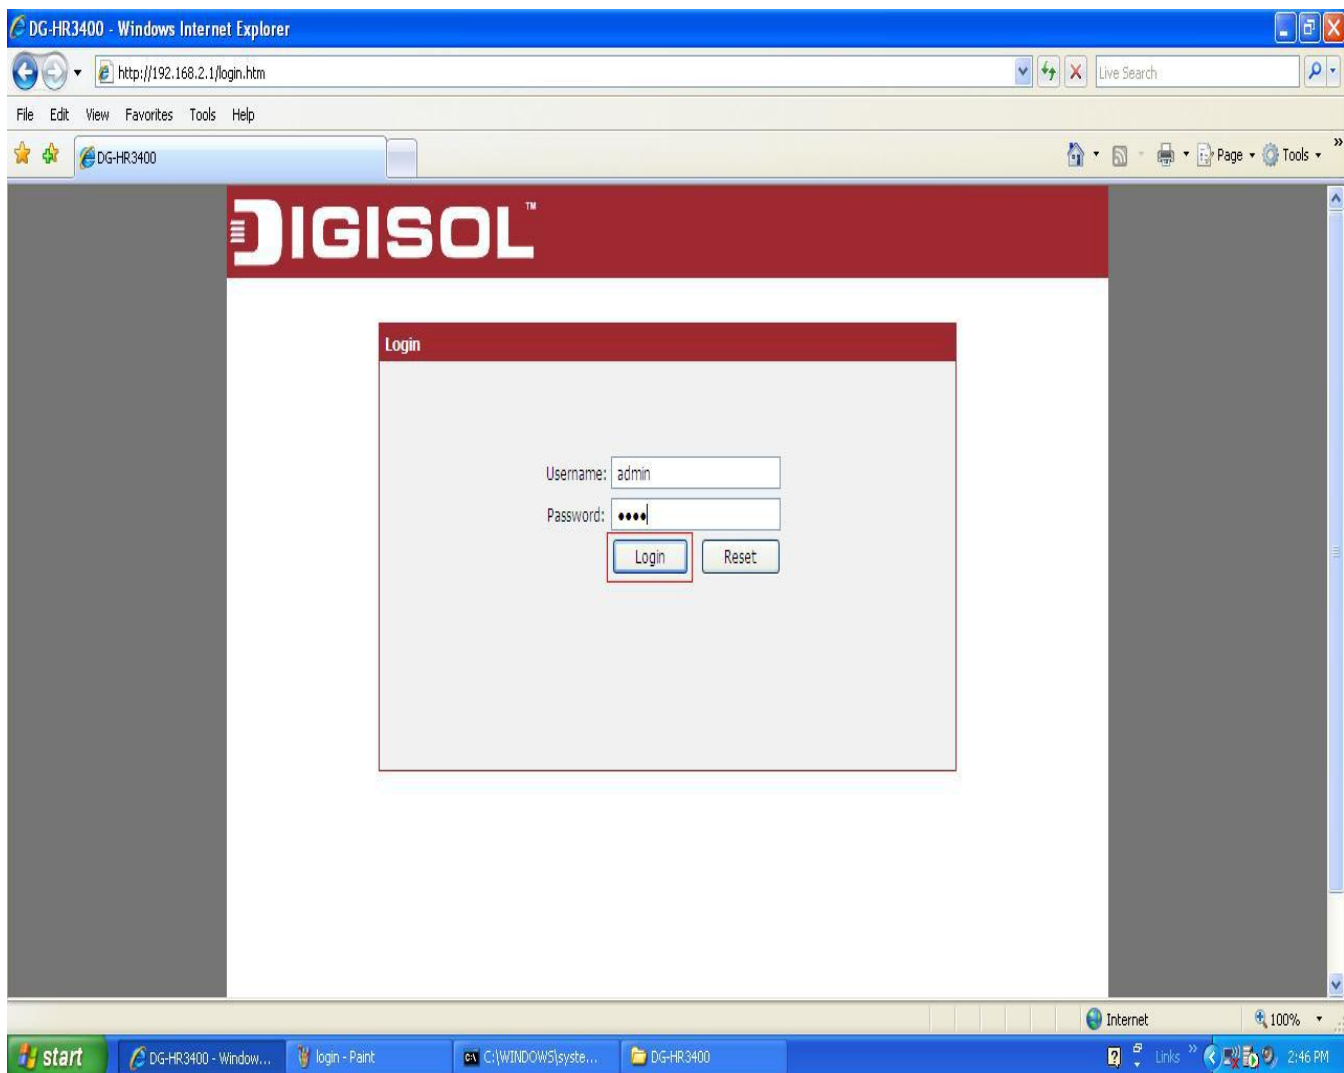


STEP 2: CONFIGURE THE ROUTER IN PPPOE MODE

Click on [Setup > Internet Setup](#)

Under [WAN Interface](#) > Select WAN Access type as [PPPoE](#)

Enter [username](#) and [password](#) provided by the ISP

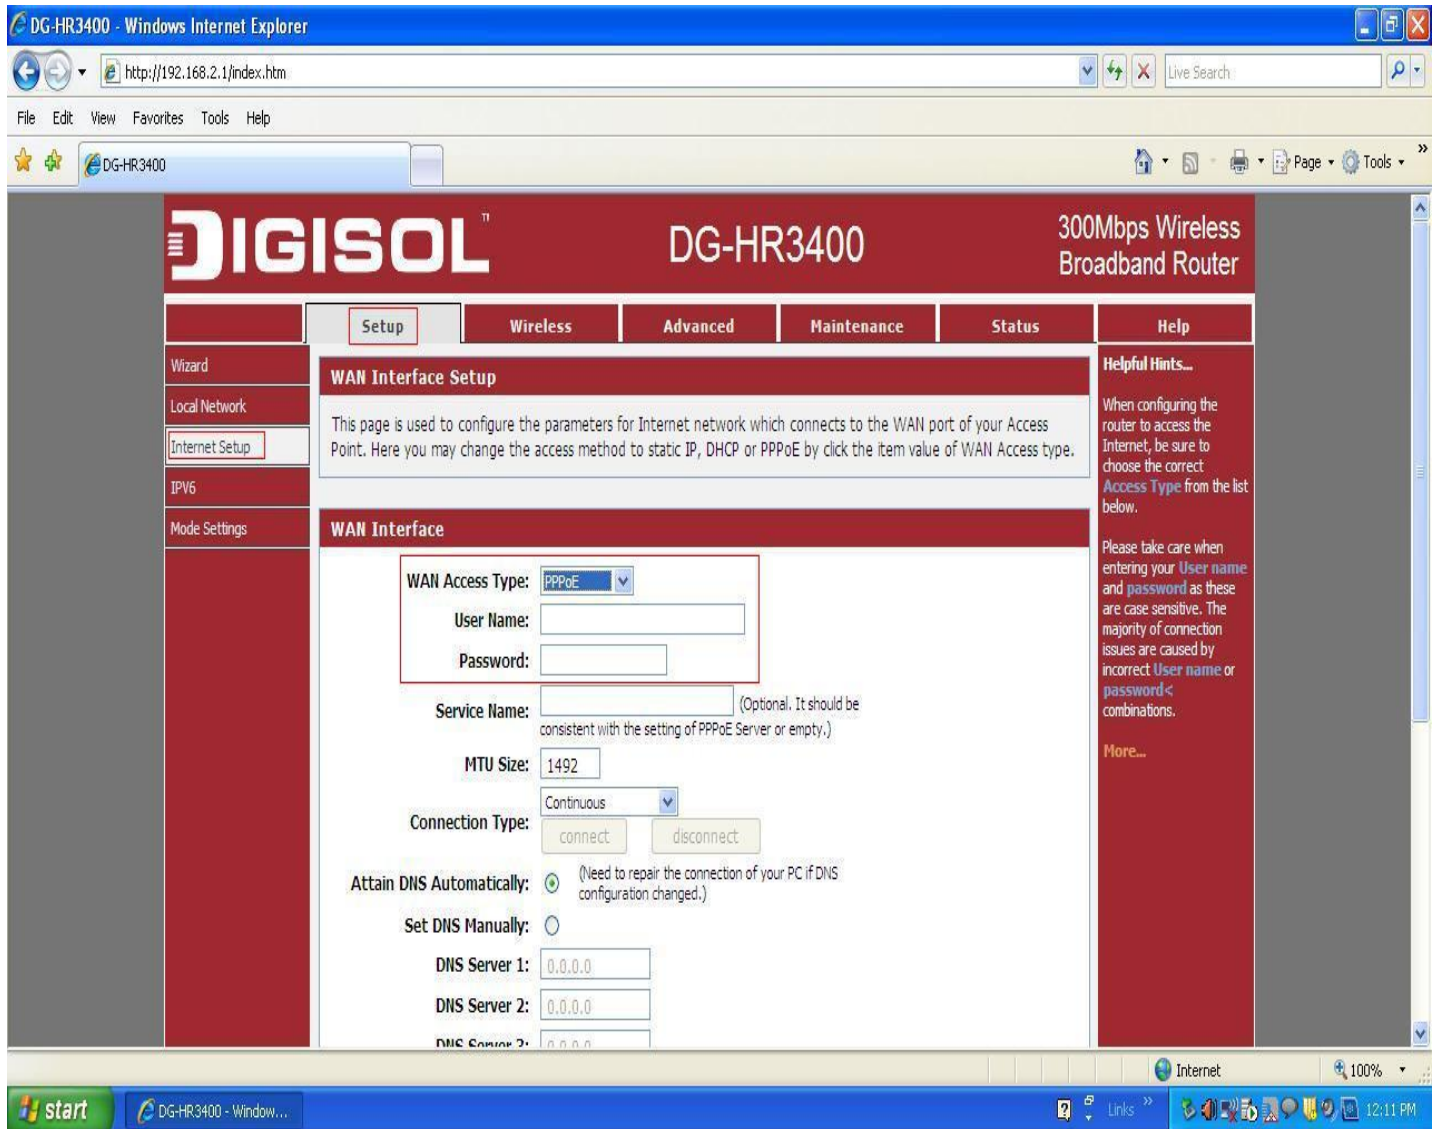

The screenshot shows the configuration page for the DIGISOL DG-HR3400 router. The browser window is titled "DG-HR3400 - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/index.htm". The page has a red header with the DIGISOL logo and "DG-HR3400 300Mbps Wireless Broadband Router". The navigation menu includes "Setup", "Wireless", "Advanced", "Maintenance", "Status", and "Help". The "Setup" menu is expanded to show "WAN Interface Setup". The "WAN Interface Setup" page contains the following fields and options:

- WAN Access Type:** A dropdown menu set to "PPPoE".
- User Name:** An empty text input field.
- Password:** An empty password input field.
- Service Name:** An empty text input field with a note: "(Optional. It should be consistent with the setting of PPPoE Server or empty.)"
- MTU Size:** A text input field containing "1492".
- Connection Type:** A dropdown menu set to "Continuous".
- Connection Type buttons:** "connect" and "disconnect" buttons.
- Attain DNS Automatically:** A radio button that is selected, with a note: "(Need to repair the connection of your PC if DNS configuration changed.)"
- Set DNS Manually:** An unselected radio button.
- DNS Server 1:** A text input field containing "0.0.0.0".
- DNS Server 2:** A text input field containing "0.0.0.0".
- DNS Server 3:** A text input field containing "0.0.0.0".

On the right side of the page, there is a "Helpful Hints..." sidebar with the following text:


When configuring the router to access the Internet, be sure to choose the correct Access Type from the list below.

Please take care when entering your User name and password as these are case sensitive. The majority of connection issues are caused by incorrect User name or password combinations.

More...

Under [MAC Clone](#) > Select [MAC From PC](#)


Click on [Apply Changes](#)

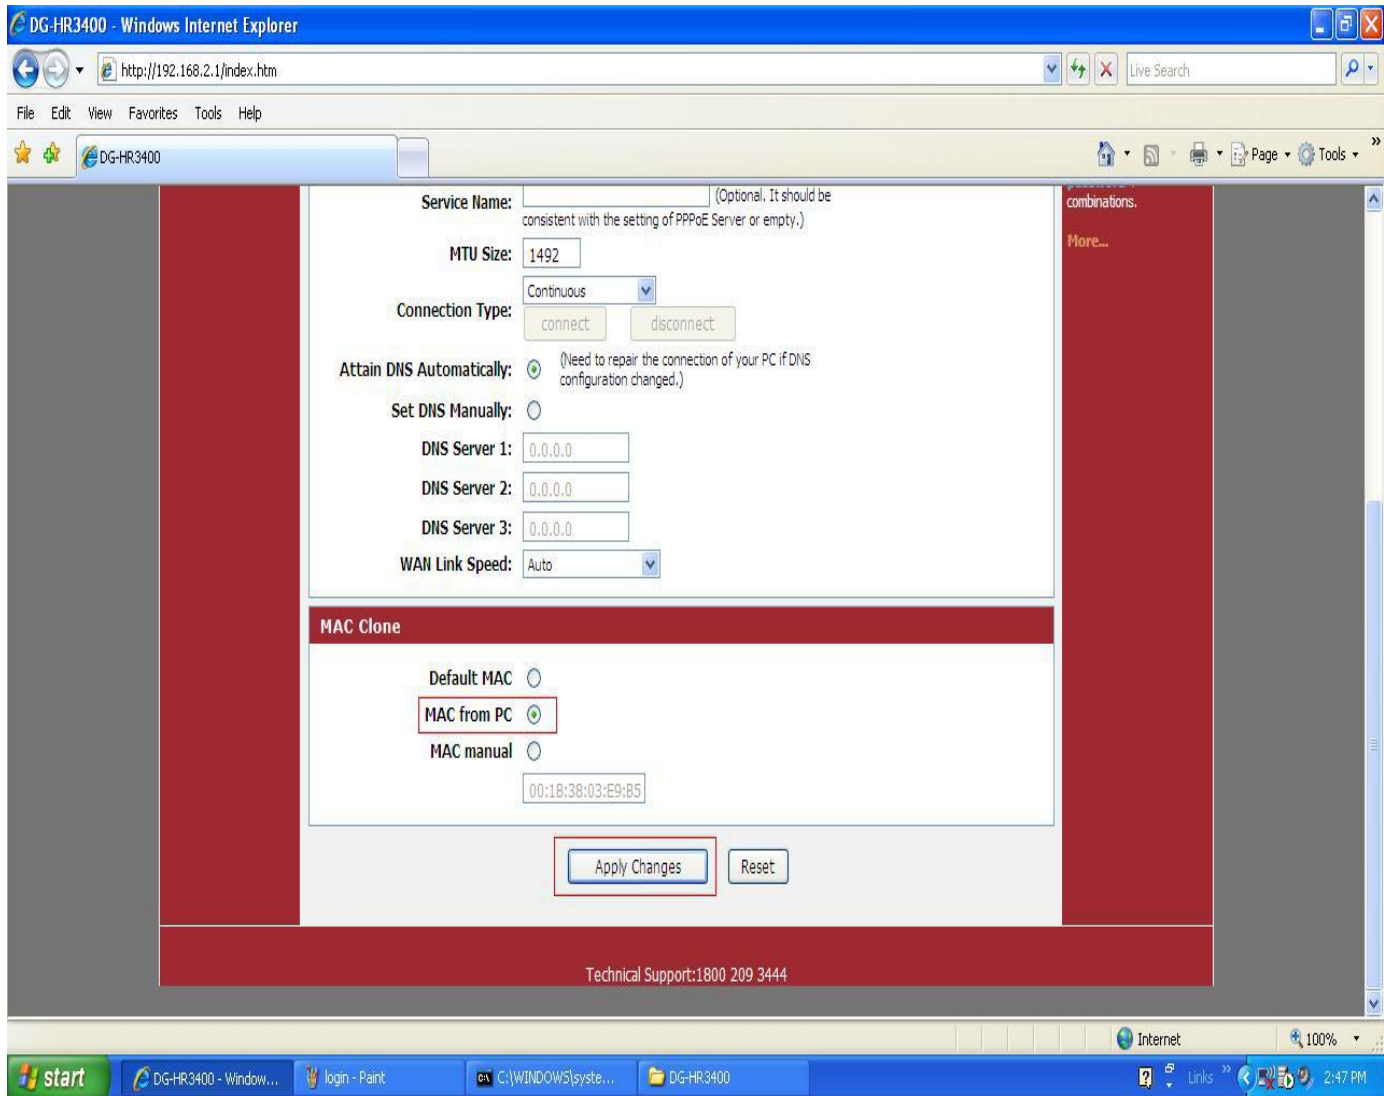

The screenshot shows the web interface of a DG-HR3400 device. The browser window is titled "DG-HR3400 - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/index.htm". The main content area is divided into two sections. The top section contains network configuration options: "Service Name" (with a note that it should be consistent with PPPoE settings), "MTU Size" (1492), "Connection Type" (Continuous), "Attain DNS Automatically" (checked), "Set DNS Manually" (unchecked), three "DNS Server" fields (all 0.0.0.0), and "WAN Link Speed" (Auto). The bottom section is titled "MAC Clone" and has three radio button options: "Default MAC", "MAC from PC" (which is selected and highlighted with a red box), and "MAC manual". Below these options is a text field containing the MAC address "00:18:38:03:E9:85". At the bottom of this section are two buttons: "Apply Changes" (highlighted with a red box) and "Reset". The footer of the page displays "Technical Support:1800 209 3444". The Windows taskbar at the bottom shows the Start button, several open windows, and the system tray with the time "2:47 PM".

STEP 3: CHECKING INTERNET ACCESS

Click [Status > Device Info >](#) If you are successfully connected to the internet, you will get numbers like 114.35.54.56 etc Under [WAN Configuration >](#) Inside the [IP Address](#) and [Gateway](#) sections.

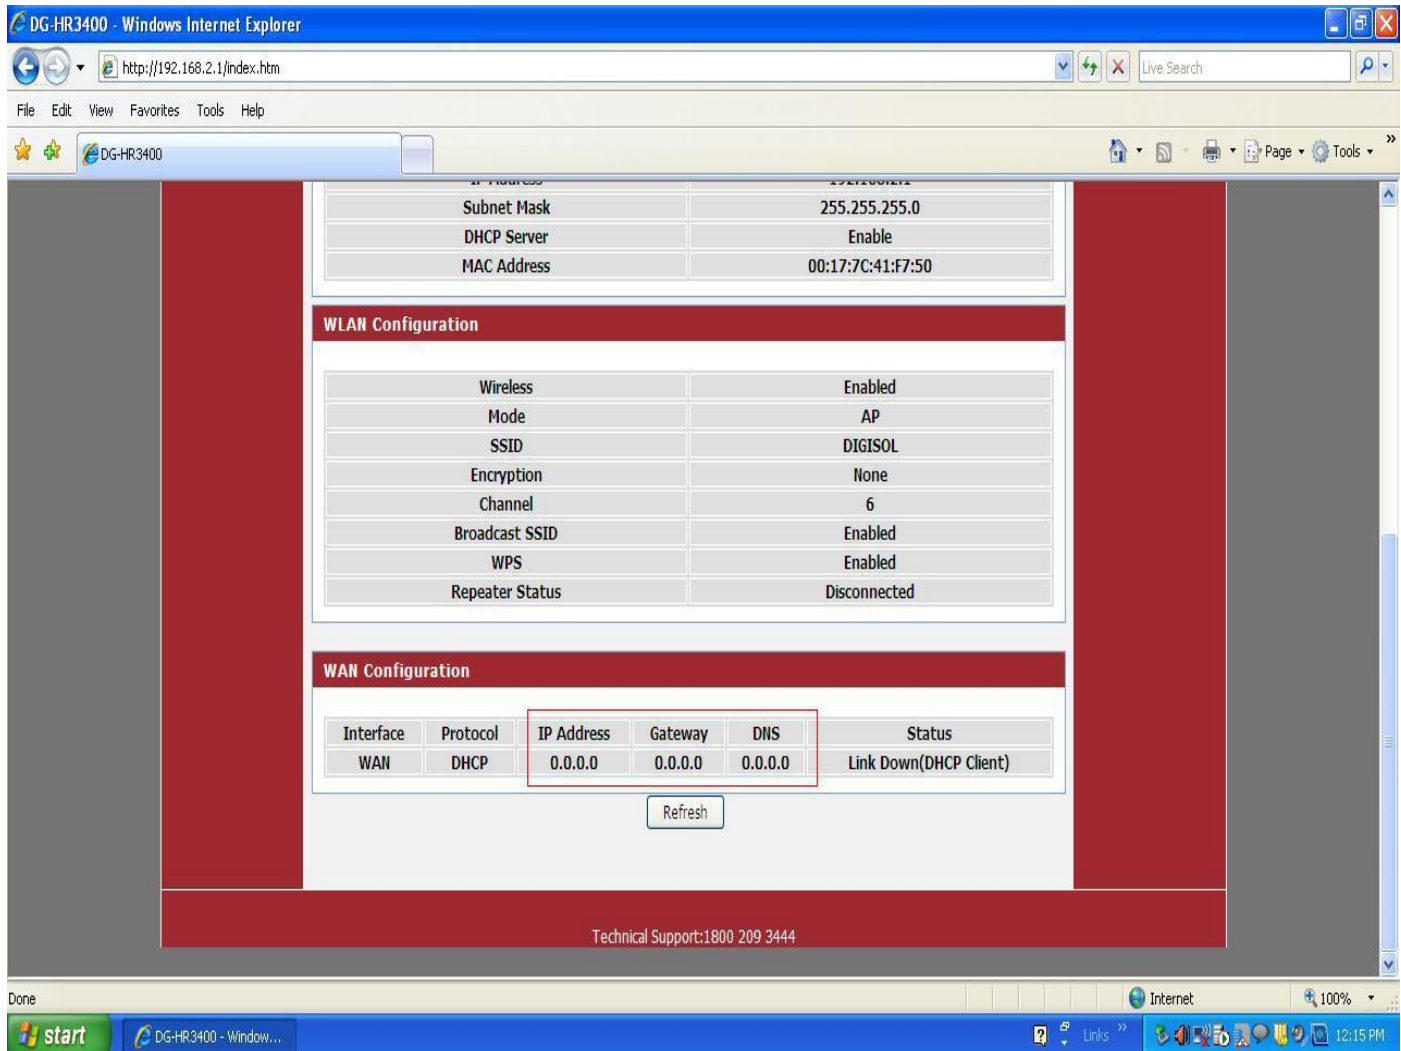

The screenshot shows the web interface of a DG-HR3400 router. The browser window is titled "DG-HR3400 - Windows Internet Explorer" and the address bar shows "http://192.168.2.1/index.htm". The interface displays the following configuration sections:

LAN Configuration:

Subnet Mask	255.255.255.0
DHCP Server	Enable
MAC Address	00:17:7C:41:F7:50

WLAN Configuration:

Wireless	Enabled
Mode	AP
SSID	DIGISOL
Encryption	None
Channel	6
Broadcast SSID	Enabled
WPS	Enabled
Repeater Status	Disconnected

WAN Configuration:

Interface	Protocol	IP Address	Gateway	DNS	Status
WAN	DHCP	0.0.0.0	0.0.0.0	0.0.0.0	Link Down(DHCP Client)

Below the WAN table is a "Refresh" button. At the bottom of the interface, it says "Technical Support:1800 209 3444".

Now verify the internet access through DG-HR3400 router.