

DIGISOL Industrial 8-Ports Gigabit Ethernet Unmanaged Switch

DG-IS1010F

Key Features:-

- 8 100M RJ45 ports+ 1 GE SFP port+ 1 GE RJ45 port
- Dimension (W×D×H): 138*108*44 mm
- IP40 Protection
- Plug and Play
- Working Temperature: -40°C-75°C



Introduction:-

DIGISOL DG-IS1010F is an unmanaged industrial switch, featuring excellent electromagnetic compatibility, anti-vibration and anti-shock ability, IP40 protection level, which enables the device to operate stably for a long time in a harsh environment. DG-IS1010F supports dual-port uplink and supports fiber optic connectivity, making it suitable for various outdoor long-distance networking applications. Enclosed in a standard DIN-rail housing, it is plug-and-play and can easily integrate into diverse industrial communication network scenarios.

Product Characteristics:-

- Ethernet lightning protection level: 6KV
- DIN aluminum alloy shell, compact and convenient
- Large buffer, high-definition video stream without freezing
- Low power consumption, fanless and noiseless
- Supports normal, monitoring, isolation working modes

Practicality:-

- Plug and play, easy to use
- Simple and safe device maintenance
- Standard DIN-rail installation, convenient
- Compact design and easy to install.

DIGISOL®


SWITCHING SOLUTIONS



Technical Specifications:-

Model Number	DG-IS1010F
Switching capacity	5.6Gbps
Port	8 100M RJ45 ports 1 GE SFP port 1 GE RJ45 port
Power input	DC: 12~55V
Environment requirements	Operating temperature/humidity: -40°C-75°C, 10%-90% non-condensing Storage temperature/humidity: -40°C-85°C; 5%-95% non-condensing
MAC	Auto learning, auto aging
Switching mode	Store-and-forward
Cooling mode	Fanless, air cooling
Lightning protection	6KV

Structural Diagram:-

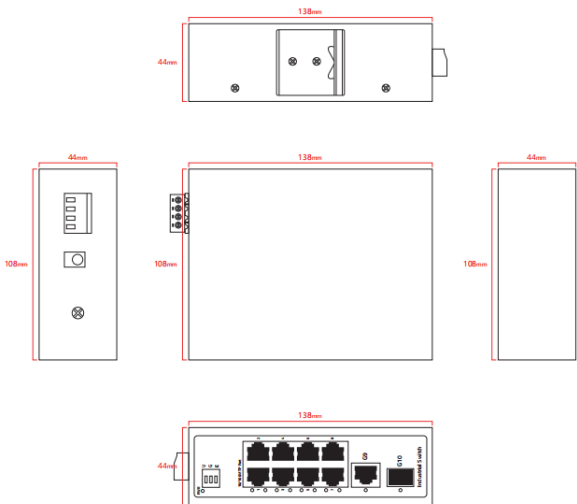

Ordering Information:-

DG-IS1010F: DIGISOL 8x100M Fast Ethernet Industrial Switch with 1 GE SFP and 1 GE RJ45 Uplink ports. Power input DC12V~55V, IP40; DIN35-rail/wall-mounting installation.

**Power Adapter not included with the package.

*Warranty shall be subject to terms and conditions specified in the DIGISOL PRODUCT WARRANTY displayed on the website of the company.

DIGISOL Logos are trademarks and/or registered trademarks of DIGISOL SYSTEMS LIMITED. Other trademarks, product, service and company names mentioned are the property of their respective owners. Information is subject to change without notice. The actual product appearance may differ from the one shown here. © 2025 DIGISOL SYSTEMS LIMITED. All rights reserved.